



www.centralwelding.com · (800) 697-0128

INDUSTRIAL CATALOG

2023



TABLE OF CONTENTS

ABRASIVES.....3-4

ADHESIVES, SEALANTS & TAPES.....4-8

CHEMICALS, LUBRICANTS & PAINTS.....9-12

HAND TOOLS.....13-20

JANITORIAL EQUIPMENT.....21-22

MARKING TOOLS.....23

MEASURING AND LEVELING TOOLS.....24-25

POWER TOOLS.....26-27

SAFETY & SECURITY.....28-35

WELDING SUPPLIES.....36

COATED ABRASIVES

Coated Flap Disc Abrasives



Tiger® Big Cat® High Density Flap Discs

Features:

- A thicker disc with larger flaps which conforms to curved and irregular surfaces while producing a consistent finish.
- 30 to 40 percent longer life than standard flap discs.
- Ideal for a working angle less than 15 degrees.

Speed: 12000 rpm

Abrasive Material: Zirconia Alumina

Tool Shape: Type 27

Dia.: 4-1/2 in

Grit: 40



SKU	Arbor Diameter
804-50803	7/8 in
804-50808	—

NON WOVEN ABRASIVES

Non Woven Pad Abrasives



Scotch-Brite™ Hand Pads

Features:

- Hand pads are a great alternative to steel wool, similar performance without the shredding, rusting, or splintering.
- May be used by hand, with a hand pad block, or on an in-line sander.
- Available in a variety of grades, including aluminum oxide, nepheline syenite, or silicon carbide abrasive materials.

Abrasive Material: Aluminum Oxide

Applications: Blending; Cleaning; Deburring; Finishing; Scuffing; Surface Preparation

Quantity: 20 EA/BX



SKU	Roughness Grade	Color
405-048011-04029	Very Fine	Maroon

WIRE BRUSH ABRASIVES

Cup Brushes



Knot Cup Brushes

Features:

- Provides flexible brushing action and cost-effective performance in general purpose cleaning applications.
- Quickly completes rough surface-prep and debris-removal tasks.
- Features a threaded nut, making for smooth, efficient operation on angle grinders.

Wire Size: 0.02 in

Arbor Size: 5/8 in - 1 1/2 in

Wire Material: Carbon Steel



SKU	Dia.	Trim Length
102-3KC58	3 in	1 in
102-4KC58	4 in	1-1/4 in

Scratch Brushes



Hand Scratch Brushes

Features:

- Heavy-duty industrial brushes.
- Wire fill and length is unsurpassed.
- Durable wood handle.

Block Material: Wood

Handle Material: Wood



SKU	Handle Type	Bristle Material	Bristle Rows
102-387SS	Shoe	Stainless Steel	4 X 16
102-388	Curved	Carbon Steel	3 X 19
102-388SS	Curved	Stainless Steel	3 X 19

Wheel Brushes



Knot Wheel Brushes

Features:

- Heavy-duty brushing action with some flexibility.
- Ideal for demanding cleaning applications on somewhat irregular surfaces.
- Use for general-purpose applications.

Dia.: 4 in

Arbor Diam: 5/8 in - 11

No. of Knots: 20

Face Width: 5/8 in

Arbor Thread: 5/8 in - 11

SKU	Bristle Material	Bristle Diam
102-4K58	Carbon Steel	0.014 in



Stringer Bead Wheel Brushes

Features:

- Very narrow face design primarily for weld cleaning and to access hard-to-reach areas.

Arbor Diam: 5/8 in - 11

Arbor Thread: 5/8 in - 11

SKU	Bristle Material	Bristle Diam	Dia.	No. of Knots	Face Width
102-4S58	Carbon Steel	0.02 in	4 in	30	4 in
102-4S58S	Stainless Steel	0.02 in	4 in	30	1/4 in
102-6S58	Carbon Steel	0.02 in	6 in	48	6 in

ADHESIVE PRODUCTS

Adhesives & Glues



3M™ Super 77™ CA Multipurpose Spray Adhesive

Features:

- Multipurpose spray adhesive bonds to many surfaces.
- Great for use in home, office and craft projects.
- Versatile, quick drying and transparent.
- Fast, permanent bond provides quick results.
- Aggressive tack provides high initial grab with enough time to position materials properly.
- Industrial sized can provides high coverage.
- Resists dripping or running when used in vertical applications.
- Also available with Low VOC.

Adhesive Tensile Shear: 300 psi

Tensile Strength: 300 psi

Chemical Compound: Synthetic Elastomer

Working Time: 15 sec to 15 min

Packing Type: Aerosol Can



SKU	Capacity vol.	Color
405-021200-21210	16.75 oz	Clear



495™ Super Bonder® Instant Adhesive

Features:

- Ensure a super-strong bond, with super bonder, designed to bond rubber, metal, and plastic parts.
- Bonds gaps up to .004".
- Easy to dispense and use.
- Cures rapidly at room temperature without the need for heat or light.

Test & Approvals: Commercial Item Standard

A-A-3097; American Bureau of Shipping

Tensile Strength: 2,750 psi

Gap Fill: 0.004 in

Chemical Compound: Cyanoacrylate

Working Time: 15 sec

Packing Type: Bottle



SKU	Capacity vol.	Color
442-135467	1 oz	Clear

Putty



Plastic Steel® 5 Minute® Putty (SF) Kits

Features:

- Fast-curing, steel-filled epoxy for dependable emergency repairs in less than one hour.
- Mixes, applies, and cures at temperatures as low as 40° F.
- Cures to a tough, steel-filled material.
- Can be machined, drilled, tapped, or sanded.
- 5-minute working time.

Specific Gravity: 2.8

Hardness: 66 Shore D

Applications: Multi-Purpose

Applicable Materials: Aluminum; Concrete; Most Metals

Full Cure Time @ Temp.: 7 days @ 75° F

Dielectric Strength: 35 V/mil

Resistance: Alkalies; Bases; Chemicals and Most Acids; Solvents



SKU	Temp. Range	Color
230-10240	200° F	Dark Grey



Plastic Steel® Putty (A) Kits

Features:

- Metal-filled epoxy putty used for hundreds of routine maintenance, production, and tooling applications.
- Patch and repair areas where welding or brazing would be undesirable or impossible.
- Bonds to most metals, concrete, and some plastics.
- Cures at room temperature and forms a tough durable metallic mass that can be drilled, tapped, machined, or painted.
- Excellent resistance to oil, gasoline, water and many chemicals.

Test & Approvals: Conforms to the Requirements of MIL-PRF-24176C, Type I

Specific Gravity: 2.8

Hardness: 85 Shore D

Applications: Maintenance; Production; Tooling Operations

Applicable Materials: Concrete; Most Metals; Some Plastics

Full Cure Time @ Temp.: 7 days @ 75° F

Dielectric Strength: 30 V/mil

Resistance: Gasoline; Many Chemicals; Oil; Water



SKU	Temp. Range	Color
230-10110	Dry 250° F; Wet 120° F	Dark Grey



Titanium Putty Kits

Features:

- High-performance, non-rusting titanium-reinforced epoxy.
- Engineered for making repairs to machinery and equipment that can be precision machined.
- Withstands heavy loads in hard chemical environments.
- High compressive strength.
- 21-minute working time.

Test & Approvals: Qualifies Under Mil Spec MIL-PRF-24176C, Type I

Specific Gravity: 1.52

Hardness: 87 Shore D

Applications: Corrosion Repair Compound

Applicable Materials: Metal

Full Cure Time @ Temp.: 7 days @ 75° F

Dielectric Strength: 56 V/mil

Resistance: Alkalies; Bases; Chemicals and Most Acids; Corrosion; Solvents



SKU	Temp. Range	Color
230-10760	Dry 350° F; Wet 150° F	Grey

SEALING PRODUCTS

Sealants



567™ PST® Thread Sealants, High Temperature

Features:

- Instant thread sealant for taper/taper threads and fittings.
- Great choice for high temperature and high pressure applications.
- Controlled strength for easy disassembly with hand tools.
- Prevents leaks, does not shrink, crack, creep, or shred.
- Provides excellent solvent resistance.
- Eliminates galling on stainless steel.

Test & Approvals: ABS; NSF/ANSI 61; UL Classified for U.S.; ULC Classified for Canada; CFIA Listed

VOC: 0.13%; 1.38 g/L

Temp. Range: -65° F - 480° F

Full Cure Time @ Temp.: 24 Hours @ 72° F



SKU	Capacity	Color	Applications	Resistance	Specific Gravity
442-2087067	50 mL	Off White	For Metal Parts	Solvent	1.15
442-2087069	250 mL	White	Pipe; Thread; Fitting	Motor Oil; Solvent	1.14

LOCTITE

5900® Flange Sealants, Heavy Body RTV Silicone

Features:

- Superior flexibility and adhesion.
- Provides instant seal.
- Non-corrosive, low odor, and low volatility.

Test & Approvals: CFIA; NSF P1

Temp. Range: -65° F - 500° F

Color: Black

Applications: Multi-Purpose

Resistance: Oil; Corrosive Process; Transmission Fluid

Full Cure Time @ Temp.: 24 h @ 77° F

Specific Gravity: 1.34

VOC: 3.08%; 32 g/L

Wt.: 1 lb



SKU	Capacity	Packing Type
442-212184	300 mL	Cartridge

Threadlockers

LOCTITE

242™ Threadlockers, Medium Strength

Features:

- Medium strength, medium viscosity, methacrylate-based threadlocking adhesive offering general purpose qualities.
- Provides quick fixture times on steel, brass and stainless steel of 5, 15 and 20 min respectively.
- Thixotropic to reduce adhesive migration.

Color: Blue

Thread Size: 1/4 in - 3/4 in

Temp. Range: -65° F - 300° F

Applications: Threadlocking

Curing Method: Anaerobic

Resistance: 111 Trichloroethane; Acetone; Brake Fluid; DEF (AdBlue®); Ethanol; Gasoline Leaded I/Unleaded; Motor Oil (MIL-L-46152); Water/Glycol 50/50



SKU	Capacity Vol.	Packing Type
442-135355	50 mL	Bottle

LOCTITE

243™ Medium-Strength Primerless Threadlockers

Features:

- General purpose threadlocker that provides a medium strength bond.
- Seals and secures metal nuts and bolts to prevent loosening due to shock and vibration.
- Works on all metals, including passive substrates, such as stainless steel, aluminum, and plated surfaces.
- Proven to be tolerant of minor contamination due to industrial oils, such as motor oils, corrosion prevention oils, and cutting fluid.

Test & Approvals: NSF 61; RoHS Certified

Color: Blue

Thread Size: 1/4 in - 3/4 in

Temp. Range: -65° F - 360° F

Fix Cure Time @ Temp.: 5 min @ 72° F

Applications: Locking and Sealing Fasteners up to 3/4 in dia

Curing Method: Anaerobic

Resistance: Corrosion; Rust



SKU	Capacity Vol.	Packing Type
442-1329467	50 mL	Bottle

TAPE PRODUCTS

Duct Tapes

3M

3M™ All Purpose Duct Tape DT8

Features:

- Instant adhesion to a wide variety of surfaces, including metal, glass, plastic and sealed concrete, by an aggressive natural rubber adhesive.
- Woven cloth scrim allows tape to tear easily by hand.
- Conformable backing is good for use on contoured surfaces.
- Good tensile strength for light duty bundling, repair, and holding.

Width: 1.88 in

Length: 60 yd

Thickness: 8 mil

Temp. Range: 150° F

Adhesion to Steel: 74 oz/in

Tensile Strength: 31 lb-in

Type: Super-Duty Duct Tape



SKU	Series	Color
405-689330-17225	DT8	Silver

Electrical Tapes

3M

3M™ Temflex™ Vinyl Electrical Tape 165

Features:

- Temflex™ Vinyl Electrical Tape 165 is a good quality, multi-purpose vinyl insulating tape.
- It has great resistance to moisture and varying weather conditions.
- It is a polyvinyl chloride (PVC) tape that is flame-retardant and conformable.

Color: Black

Material: Polyvinyl Chloride

Thickness: 6 mil



SKU	Length	Width
405-076308-92568	60 ft	3/4 in

3M

Scotch® Super 33+™ Vinyl Electrical Tape

Features:

- Premium grade tape that provides electrical insulation for all wires and cables rated up to 600 V.
- Designed for above/below grade, indoor/outdoor, low and high voltage applications, and for harnessing cables.
- Offers electrical and mechanical protection with the combination of a pressure sensitive, rubber resin adhesive and elastic, PVC backing.
- Provides a protective jacket for high voltage cable splices.
- Highly resistant to UV rays, abrasion, moisture, alkalis, solvents, and many acids.
- Compatible with solid dielectric cable insulation, synthetic cable insulations, jackets, and splicing compounds.

Color: Black

Material: Rubber-Based Adhesive; Vinyl (PVC) Backing

Thickness: 7 mil



SKU	Length	Width
500-061335	52 ft	3/4 in

3M

Scotch® Vinyl Electrical Tape Super 88



Features:

- For indoor and outdoor applications.
- Pressure sensitive rubber based adhesive.
- Compatible with solid dielectric cable insulations.
- Compatible with rubber and synthetic splicing compounds, as well as epoxy and polyurethane resins.
- Inhibits corrosion of electrical conductors.

Test & Approvals: UL Listed, UL 510 Standard "Insulating Tape" (product category DANZ), file E129200; CSA Certification, Standard C22.2 No. 197-M1983 "PVC Insulation Tape", File LR 48769; Complies with Property Requirements of Federal Specification MIL-I-24391

Color: Black | **Material:** Polyvinyl Chloride (PVC) Backing

Thickness: 8.5 mil

SKU	Length	Width
500-061434	66 ft	3/4 in

CLEANING PRODUCTS

Cleaners & Degreasers

CRC

Brakleen® Brake Parts Cleaners

Features:

- Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads.
- Using a brake cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system.
- Formulated to quickly and effectively remove grease, brake dust, brake fluids, oils, and other contaminants from brake parts, lining, pads.
- Options available for chlorinated and non-chlorinated formulas, including non-chlorinated that is less than 45% VOC (05084), ultra low VOC that complies with SCAQMD Rule 1171 (05151), and compliant with VOC regulations for all 50 states (05050).

Applicable Material: ABS, All Brake Systems Including Springs and Wedge Brakes; Brake Cylinders; Brake Drums; Brake Linings; Brake Shoes; Calipers; Clutch Discs; Disc; Disc Brake Pads; Drum

Removes: Brake Dust; Brake Fluids; Grease; Oils; Other Contaminants

Capacity Vol.: 20 oz



SKU	Fill Amount	Dielectric Strength	Odor/Scent	VOC	Specific Gravity
125-05088	14 wt oz	—	Solvent	84%; 657.2 g/L; 5.5 lb/gal	0.7824
125-05089	19 wt oz	37,500 V	Irritating	0%; 0 g/L; 0 lb/gal	1.62



Lectra Clean® Heavy Duty Electrical Parts Degreasers

Features:

- Effectively removes contaminants to increase operating efficiency of energized electrical equipment.
- Evaporates quickly, leaves no residue and has no flash or fire point.
- Designed and labeled to be used on equipment where energy and/or residual exists during cleaning.

Dielectric Strength: 50,500 V

Color: Clear

Removes: Dirt; Grease; Oil

Chemical Compound: Chlorinated; Solvent

Odor/Scent: Irritating

VOC: 0%; 0 g/L; 0 lb/gal



SKU	Capacity Vol.	Fill Amount
125-02018	20 oz	19 wt oz



QD™ Contact Cleaners

Features:

- Suitable for cleaning sensitive electronics and electrical equipment without leaving a residue.
- Evaporates quickly, leaves no residue and is safe to use on all plastics.
- Use where lower flashpoint cleaners are acceptable.
- Options available for NSF P1 Registered and NSF K2 Registered.

Dielectric Strength: 39,500 V

Color: Clear

Applicable Material: Busbars; Circuits; Contacts; Edge Connectors; PCs; Printed Circuit Boards; Relays; Switches and Breakers; Tape Heads; Telephones

Chemical Compound: Petroleum Distillate

Odor/Scent: Hydrocarbon-Like

VOC: 75%; 495 g/L; 4.1 lb/gal



SKU	Capacity Vol.
125-03130	11 oz



Industrial Cleaners and Degreasers

Features:

- All-purpose cleaner, degreaser and deodorizer.
- Concentrate dilutes up to 1:30.
- Easily cuts through thick grease, oils, hydraulic fluids and built-up grime on all washable surfaces.
- Non-abrasive, non-corrosive, non-flammable and VOC compliant formula.
- Safe for use in cleaning equipment including floor scrubbers, carpet cleaners and parts washers.
- Orally non-toxic and readily biodegradable formula*.
- EPA Safer Choice product.
- Safer than caustic cleaners and solvents.

Dielectric Strength: 65-70 mV/m

Color: Green

Applicable Material: Carpet; Ceramics; Cement/Concrete; Enamel; Fabric; Fiberglass; Laminates; Metal; Plastic; Upholstery

Removes: Grease; Oil; Dirt; Soil

Chemical Compound: Ethoxylated Alcohol; Sodium Citrate; Sodium Carbonate; Citric Acid

Odor/Scent: Sassafras

VOC: 0.25%

Specific Gravity: 1.03



SKU	Capacity Vol.	Fill Amount
676-270000113008	55 gal	55 gal

LEAK DETECTORS & PENETRANTS

Penetrants



PB™ Penetrating Catalysts

Features:

- Great for loosening rusted or frozen screws and bolts.
- Effective rust inhibitor.
- Non-evaporating lubricant.
- Penetrates into hard-to-reach areas.
- Suitable for brake, exhaust and suspension system jobs.
- Available with ProStraw™ with Control Flow Technology™ (16-PB-DS).

Packing Type: Aerosol Can



SKU	Capacity Vol.	Physical Form
108-16-PB-DS	11 oz	Aerosol Liquid



Spotcheck® SKC-S

Features:

- Non-chlorinated cleaner/remover.
- Used as a pre-cleaner, a post cleaner and a penetrant remover.
- Recommended general purpose.

Packing Type: Aerosol Can



SKU	Capacity Vol.	Physical Form
387-01-5750-78	16 oz	Liquid

Surface Irregularity Testing Product Accessories



Spotcheck® SKD-S2 Solvent Developers

Features:

- Non-halogenated, ready-to-use solvent developer.
- Suspends white developing particles in a fast drying solvent.
- Produces opaque white coating that provides excellent contrasting background for penetrant indications.



SKU	Capacity Volume	Packing Type
387-01-5352-78	11.6 oz	Aerosol Can

LUBRICANTS & PENETRANTS

Anti-Seize Compounds



Regular Grade Compounds

Features:

- Protects against rust, corrosion, carbon fusion and seizure at high temperatures.
- Keeps parts working longer with less wear, and enables faster disassembly when repairs are needed.

Temp. Range: -297°F - 1800 °F

Color: Silver

Chemical Compound: Copper; Graphite; Aluminum

Resistance: Heat; Corrosion; Rust; Seizure

Flash Point: 475 °F

Applications: Aircraft; Marine; Automotive; Petrochemical; Oil Exploration; Power Generation; Agriculture; Logging; Mining; Food Processing



SKU	Capacity Wt.	Packing Type	Applicable Materials	Physical Form
535-30803820	8 oz	Brush Top Can	Metals	Liquid
535-30803827	16 oz	Aerosol Can	—	—
535-30803817	1 lb	Brush Top Can	Metals	Liquid

Chain & Cable Lubricants



Chain & Cable Fluids

Features:

- Superior penetrating oil.
- A cleansing non-gumming oil.
- Lubricates wire rope, chains, cables, any moving metal surfaces.
- Prevents rust and corrosion.
- Protects brightwork, loosens rusty nuts and bolts.
- Rusty for tapping and drilling.

Color: Amber

Odor/Scent: Sweet

Applicable Materials: Metal Surfaces

Applications: Cable; Chain; Slide

Resistance: Corrosion; Road Grime; Rust; Salt Water

Specific Gravity: 0.93

Type: Penetrating Oil



SKU	Packing Type	Temp. Range
293-L0135-063	Spray Can	-

Corrosion Inhibitors



Cold Galvanizing Compounds

Features:

- Provides corrosion protection to ferrous metal surfaces.
- Good for welded joints, guard rails, corrugated metal buildings, and refinery pipes.
- Best long term rust protection.
- Dry time set to touch in 3-5 min., hard dry in 48 hrs.

Packing Type: Aerosol Can

Color: Gray

Applicable Materials: Metal

Applications:

Industrial; Aviation; Marine; Manufacturing

Chemical Compound: Zinc

Flash Point: <0 °F

VOC: <80%

Specific Gravity: 2.03 -

Type: Corrosion Protection

Recommended Film Thickness: 3-4 mils

Wt.: 1 lb



SKU	Capacity Vol.	Fill Amount
205-7007	13 oz	13 oz



Galva Bright Premium

Features:

- Stops rust and corrosion on any iron or steel surface.
- Zinc-rich formula for long-lasting protection.
- Ready-to-use, the application can be sprayed or brushed on.
- Drying Time -Tack-free: 3-5 min., Dust-free: 5-10 min., To touch: 15-20 min., Dry: 24 hrs.

Packing Type: Aerosol Can

Temp. Range: -

Color: Gray

Applicable Materials: Steel

Applications: Tools; Steel Stock; Parts; Machinery

Chemical Compound: Zinc

Odor/Scent: Hydrocarbon

Flash Point: <0 °F

VOC: 90%

Specific Gravity: 0.67 -

Type: Rust/Corrosion Prevention

Wt.: 1.16 lb



SKU	Capacity Vol.
205-7008	13 oz

Fluids



EP-Xtra® Cutting Fluids

Features:

- Outstanding performance for any cutting operation on any metal.
- Absolutely without equal on hard metals and on cuts requiring extreme pressure or long cutting times.
- Metal cutting fluid used to increase speed, extend tool life and improve cut quality

Container Size: 16 oz



SKU	Applicable Materials	Packing Type
702-10016E	Aluminum; Brass; Cast Iron; HSS; Inconel; Mild Steel; Nickel; Stainless Steel; Titanium	Squeeze Bottle with Spout

Grease



JT-6® Hi-Temp Grease #2

Features:

- Formulated with a high dropping point for use over a wide temperature range.
- Provides excellent protection in severe service and outstanding shock load protection.

Test & Approvals: Meets Highest Performance Categories of ASTM D4950 Automotive Grease Classification System; GC for Wheel Bearing Service; LB for Chassis Service

Packing Type: Tube

NLGI Grade: 2

Color: Red

Temp. Range: -10° F - 325° F

Flash Point: >302 °F

Specific Gravity: - 0.93

Thickener: Lithium Complex

Odor/Scent: Mild Petroleum

Applicable Materials: Metal

Applications: Agricultural; Automotive Chassis and Bearings; Construction; Industrial; Trucking Chassis and Wheel

Resistance: Shock Load; Cold Weather

Quantity: 1 each



SKU	Capacity Wt.	Capacity Vol.
122-665005002080	14 oz	14 oz

Oils



Open Stock Lubricants

Features:

- Lubricating ingredients are widely dispersed and hold firmly to all moving parts.
- Dissolves adhesives, allowing easy removal of labels, tape, stickers, and excess bonding material.
- Protects metal surfaces with corrosion-resistant ingredients to shield against moisture and other corrosive elements.
- Loosens rust-to-metal bonds and frees stuck, frozen or rusted metal parts.
- Product displaces moisture quickly and dries out electrical systems to eliminate moisture-induced short circuits.

Packing Type: Aerosol Can

Temp. Range: -50 °F - 300 °F

Color: Amber

Odor/Scent: Mineral Oil



SKU	Capacity Vol.	Container Size	Flash Point
780-490040	11 oz	11 oz	131 °F
780-490057	12 oz	12 oz	131 °F
780-490088	16 oz	16 oz	122° F

PAINT & PAINT SUPPLIES

Paint Brushes



White Chinese Bristle Paint Brushes

Features:

- Natural wood finish handle with White Chinese bristles.
- Steel ferrule.
- Perfect for latex paints, chip, and touch-ups.

Trim Length: 1-1/2 in

Bristle Material: White Chinese

Handle Material: Wood

SKU	Brush Width	Thickness
449-1500-2	2 in	5/16 in

Paints



Interior/Exterior Industrial Maintenance Paints

Features:

- VOC-compliant acrylic lacquer formula, free of lead hazards.
- Hard, protective, durable finish.
- High amount of solids assures maximum coverage with excellent adhesion.
- Dries fast, in just 12 minutes to the touch.
- Tough, high-gloss finish.
- Uniform coverage.
- No recoat window, recoat anytime.

Packing Type: Aerosol Can

Application Temp. Range: 50° F - 90° F

Dry Heat Resistance: 200° F

Applicable Materials: Metal Surfaces; Wood



SKU	Capacity Vol.	Color
425-K01601A07	12 oz	Glossy Black

LOCTITE

7649™ Primer N™

Features:

- A solvent-based primer that features very long on-part life of 30 days.
- Use to speed the cure of all Loctite® brand anaerobic products and ensure proper cure on inactive metals.
- Ideal for cure conditions below room temperature.
- Dries in 30 - 70 seconds.

Packing Type: Aerosol Can

Application Temp. Range: -

Applicable Materials: Passive Metals



SKU	Capacity Vol.	Color
442-209715	4.5 oz	Clear Green



High Performance V2100 System Enamel Spray Paints

Features:

- Maximum corrosion protections.
- Fast dry—30 minutes.
- Superior resistance to chipping, cracking and peeling.
- Higher paint solids for excellent coverage and better gloss retention.
- Can be used on surfaces that reach temperatures up to 200°F.
- For indoor and outdoor protection.

Packing Type: Aerosol Can

Application Temp. Range: 50° F - 100° F

Dry Heat Resistance: 212° F

Applicable Materials: Metal; Masonry; Wood; Concrete



SKU	Capacity Vol.	Color
647-V2179838	15 oz	Gloss Black
647-V2182838	15 oz	Gray

BATTERIES

DURACELL



Procell® Batteries

Features:

- AA, AAA, C and D batteries are guaranteed for 7 years in storage, 9V batteries are guaranteed for 5 years in storage.
- Recommended for scheduled battery replacement programs.
- Economically packaged in bulk and individually date-coded for effective inventory management.

Voltage: 1.5 V

SKU	Battery Type	Batt. Size	Quantity
243-PC1300	Non-Rechargeable Dry Cell Alkaline	D	—
243-PC1400	Non-Rechargeable Dry Cell Alkaline	C	12 per pack
243-PC1500BKD	Non-Rechargeable Dry Cell Alkaline	AA	24 per pack
243-PC2400BKD	Non-Rechargeable Dry Cell Alkaline	AAA	24 per pack

STRAPPING PRODUCTS

Cable Ties



UV Stabilized Cable Ties

Features:

- General purpose use.
- Nylon 6/6 features light weight, high strength and a wide temperature range.
- Contains increased resistance to UV light (does not totally eliminate the destructive effects of the light).

Color: Black

Material: Nylon 6/6



SKU	Length	Width	Thickness	Tensile Strength	Bundle Diam	Quantity
102-1150UVB	11.1 in	0.18 in	0.054 in	50 lb	3 in	100 EA/BG
102-1450UVB	14.6 in	0.18 in	0.054 in	50 lb	4 in	100 EA/BG
102-15120UVB	15 in	0.298 in	0.069 in	120 lb	4 in	50 EA/BG

COOLERS & CHESTS



400 Series Coolers

Features:

- Ultratherm® insulation for maximum cold retention and maintains ice for up to 3 days in temperatures as high as 90°F.
- HDPE hide won't chip, peel, buckle, or rust.
- UV stabilizers prevent fading, cracking in all exposures.
- Front push-button spigot is drip-resistant.
- White FDA Grade liner is easy-to-clean and resists stains and odors.
- Wide mouth pressure fit lid for easy filling.
- Keeper cord prevents lid loss.

Test & Approvals: OSHA

Color: Red/Yellow



SKU	Width	Length	Height
385-4101	15-7/8 in	—	23-1/4 in
385-431	13-1/2 in	13.75 in	14 in
385-451	13 in	14-1/2 in	20.38 in

CLAMPS & VISES

Clamps & Spreaders



Drop Forged C-Clamps

Features:

- Extra throat depth.
- Non-slip clamping on all shapes.
- Steel spindles are copper plated for spatter protection.
- Swivel pads adjust freely to bear evenly on clamped part.
- Individually boxed for easy storage and protection.

Test & Approvals: Meets or exceeds Federal Standards

Type: C-Clamp

Spindle Dia: 3/4 in

Body Material: Drop Forged Steel

Handle Type: Sliding Pin

Handle Material: Steel



SKU	Opening Size	Overall Length	Throat Depth	Pressure
102-404C	3-1/4 in	4 in	3-1/4 in	6,200 lb
102-406C	6-1/16 in	6 in	4-1/8 in	6,900 lb
102-408C	8-1/4 in	8 in	5 in	6,600 lb




Locking C-Clamps with Swivel Pads

Features:

- Wide-opening jaws provide greater versatility.
- Swivel pads hold tapered work, awkward fabricating jobs, and delicate projects.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Guarded release trigger quickly unlocks and protects from accidental release.

Throat Depth: 2-5/8 in

SKU	Overall Length
586-11SP	11 in

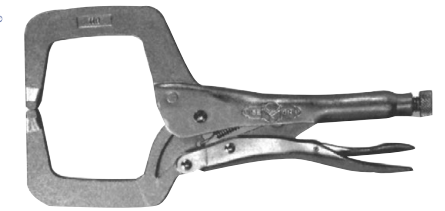

The Original™ Locking C-Clamps with Regular Tips

Features:

- Wide-opening jaws provide greater versatility in clamping a variety of shapes.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Classic trigger release designed to provide maximum locking force.

Test & Approvals: ASME B107.36-2002

Type: Locking C-Clamp

Throat Depth: 2-5/8 in

Pressure: Adjustable Turn Screw

Body Material: Heat-Treated Alloy Steel

Handle Type: Vise-Grip Release

Handle Material: Heat-Treated Alloy Steel

SKU	Opening Size	Overall Length
586-11R	4 in	11 in

Vises



Mechanics Vises

Features:

- Swivel base rotates 360 degrees and has double lockdowns ensuring maximum stability.
- Powder coat paint resists scratches and provides a tough durable finish.
- Replaceable hardened steel top and pipe jaws.
- Large anvil work surface.

Jaw Opening: 5-3/4 in

Throat Depth: 4-1/8 in

Pipe Jaw Cap.: 1/4 in - 3-1/2 in

Jaw Material: Steel

Material: Cast Iron

Finish: Powder Coated Paint

SKU	Base Type	Jaw Width
825-21500	Swivel	6 in



Tradesman Vises

Features:

- Large anvil surface.
- 60,000 PSI tensile ductile iron body parts.
- 360° swivel base with double lockdowns.
- Wider jaws provide greater clamping surface.
- Fully enclosed spindle increases the life of the vise.

Jaw Opening: 6 in

Throat Depth: 4 in


Pipe Jaw Cap.: 1/4 in - 3-1/2 in

Jaw Material: Steel

Material: Cast Iron

Finish: Powder Coated

SKU	Base Type	Jaw Width
825-28807	Swivel	6-1/2 in

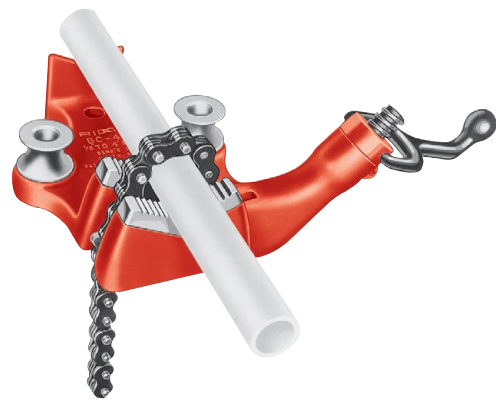

Top Screw Bench Chain Vises

Features:

- Rugged cast-iron base has handy pipe rest and bender.
- Crank handle is anchored to base.

SKU	Pipe Cap.	Material
632-40195	1/8 in - 4 in	Cast Iron Base with Anchored Crank Handle
632-40210	1/4 in - 6 in	Cast Iron Base with Anchored Crank Handle



TRISTAND® Portable Chain Vises

Features:

- Optimized base for more working area.
- Benders are located at the rear of the base and three tool hangers are provided.
- Integrated ground lug provides a conductive surface to connect the weld ground.
- Leg chain retains legs even when subjected to rugged use during operation and transport.
- Rugged tool tray offers prolonged stability before requiring a leg adjustment.



SKU	Pipe Cap.	Material
632-36273	1/8 in - 6 in	Ductile Iron Work Surface; Hardened Steel Jaws and Tubular Legs

FILES

Half Round Files



Half-Round Files

Features:

- Used on concave, convex and flat surfaces.
- Rounded on one side, flat on opposite.
- Backs of all half-round bastard files are double-cut.
- Backs of all 4 in and 6 in files are single-cut.
- Backs of all half-round second-cut files are longer than 6 in are double-cut.

Tooth Pattern: Curved - Single Cut; Flat - Single Cut

Tool Shape: Straight

Style: Pipeliner File; American Pattern

Applicable Materials: Iron; Mild Steel; Plastics; Wood

Quantity: 1 EA/EA

SKU	Cut Type	Length
183-05190N	Double-Cut Bastard	14 in

HAMMERS, SLEDGES, MALLETS & AXES

Hammers



Chipping Hammers

Features:

- Hammer heads are hardened to precisely controlled temperatures for durability and strength.
- Wide-blade design removes slag faster and adds to the life of the tool.
- Drop forged, heat-treated, hardened head withstands more grinds.
- Well balanced handle grip for comfort and ease-of-use.

Handle Material: Steel

Head Material: Forged Steel

Head Length: 6 in

Color: Black



SKU	Overall Length	Handle Type
900-CH-200	11 in	Spring



Toughstrike American Hickory Sledge Hammers

Sledge Hammers

Features:

- American hickory handle reduces shock.
- Double-face forged steel hammer head for maximum durability.
- Overstrike protection to prevent handle breakage.
- Wedge/ring connection for trusted head retention.
- Used for heavy demolition work and driving spikes/wedges.

Handle Type: Wood

Grip Style: Bare Wood

Handle Material: American Hickory

Color: Black; Natural



SKU	Head Weight	Handle Length
027-20185000	8 lb	36 in
027-20184800	6 lb	36 in
027-20185200	10 lb	36 in



B.A.S.H.® Unbreakable™ Handle Sledge Hammers

Features:

- Unbreakable™ Technology—steel core eliminates breaking during overstrikes.
- Safety Plate—secures head to handle preventing head dislodging.
- Ergonomic Handle—shaped and thickened for improved comfort and less vibration.
- Non-Slip Grip—vulcanized rubber handle for secure grip while striking.
- Lanyard Hole—safely secure hammer to wrist or stationary object.

Handle Type: Ergonomic and Unbreakable™

Grip Style: No-Slip Rubber Grip

Handle Material: Vulcanized Rubber; Steel

Color: Green; Black



SKU	Head Weight	Handle Length
825-20412	4 lb	12 in

KNIVES & MULTI-PURPOSE TOOLS

Knife Blades



Heavy Duty Utility Blades

Features:

- Fits most standard utility knives.
- Precision honed edge.
- 0.025 in Blade thickness.

No. of Cutting Edges: 1

Type: Replacement Utility Blade

Quantity: 100 Pk. with Dispenser

Wt.: 0.01 lb

SKU	Blade Shape	Blade Tip Shape
680-11-921A	Trapezoid	Triangular Point

Knives

STANLEY



QuickChange™ Retractable Utility Knives

Features:

- Change blades quickly without a screwdriver.
- Three position retractable blade slide.
- Swing-out blade storage magazine.
- Integrated string cutter for use even when blade is retracted.

Blade Length: 2-7/16 in

Blade Material: Carbon Steel

Handle Material: Metal

Color: Gray

Blade Tip Shape: Utility

Handle Type: Straight

Includes: (3) 11-921 1992® Heavy-Duty Blades

Width: 3 in

Packing Type: Card

Wt.: 0.45 lb

SKU	Handle Length	Overall Length
680-10-499	6 in	6-3/8 in

STANLEY



Self-Retracting Utility Knives

Features:

- Spring-loaded blade retracts into knife automatically when pressure on slide button is released.
- Knife can't be left around or put in a pocket with the blade exposed.
- INTERLOCK® nose secures blade safely between knife halves.

Blade Length: 2-1/8 in

Blade Material: Carbon Steel

Handle Material: Carbon Steel

Color: Orange

Blade Tip Shape: Round Point

Handle Type: Contoured

Includes: (1) 11-987 Blade

Height: 3/4 in

Width: 1-5/16 in

Packing Type: Card

Type: Safety Knife

Wt.: 0.34 lb

SKU	Handle Length	Overall Length
680-10-189C	5-7/8 in	5-7/8 in

LAWN & GARDEN TOOLS

Shovels & Spades

RAZORBACK
PROFESSIONAL TOOLS

Round Point Shovels

Features:

- This round point shovel is tough enough to dig in the hardest, rockiest soil.
- Features a heavy-duty steel blade.
- Options available for North American hardwood or fiberglass handles, straight or D-Grip handles, open or closed backs, and forward turned step or rolled step styles.

Blade Type: Round Point; Open Back; Forward Turned Step

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Socket Length: 11 in



SKU	Blade Length	Blade Width
760-45520	12 in	8.75 in

RAZORBACK
PROFESSIONAL TOOLS

Square Point Transfer Shovels

Features:

- Strength and durability make RAZOR-BACK® tools the choice of professionals.
- This sturdy square point shovel is an essential part of any tool assortment.
- It's perfect for moving loose garden material, sand, top soil or debris.
- It can also be used to shape beds, mix concrete, level off areas that need to be flat or to scrape stubborn material off driveways or other hard surfaces.
- Handle options available for straight, straight with cushion grip end, or D-grip and North American hardwood or fiberglass.

Blade Type: Square Point; Open Back; Rolled Step

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Socket Length: Dual Rivet Extended Tab



SKU	Blade Length	Blade Width
760-44101	12 in	9.5 in

TRUE TEMPER

Aluminum Scoop with Hardwood Handle

Features:

- Durable and lightweight scoop is ideal for snow removal.
- Features a D-Grip handle for optimum lift and leverage.
- Excellent for lifting loose and bulky materials.

Blade Type: Ribbed

Blade No.: #12

Handle Type: D-Grip

Handle Material: Hardwood; Plastic

Blade Material: Aluminum

Blade Thickness: 0.076 in



SKU	Blade Length	Blade Width
027-2681200	18 in	15.25 in

TRUE TEMPER

Poly Scoops with Hardwood Handle

Features:

- This poly scoop is perfect for moving and scooping grain, seed, feed, fertilizers, and other granulated materials.
- It's also a useful and versatile garden tool.
- Sturdy enough for general clean-up or for moving mulch, soil, or even snow.
- Options available with straight or D-grip handles.

Blade Type: Scoop

Blade No.: #12

Handle Type: D-Grip

Handle Material: Hardwood; Steel

Blade Material: Poly



SKU	Blade Length	Blade Width
027-2604300	18 in	14.37 in

UnionTools

Square Point Transfer Shovels

Features:

- Perfect for moving loose garden material, sand, top soil, or debris.
- Can also be used to shape beds, mix concrete, level off areas that need to be flat, or to scrape stubborn material off driveways or other hard surfaces.
- Options available for poly D-Grip short handled and long handled shovels.

Blade Type: Forward Turned-Step; Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Socket Length: 9 in



SKU	Blade Length	Blade Width
760-40184	11.5 in	9.25 in

Wheelbarrows

TRUE TEMPER

Steel Wheelbarrows

Features:

- Ideal for homeowners, landscapers, and light construction work.
- The seamless steel tray is plenty tough and will provide years of service.
- Available with never flat tire or tubed tire.

Wheel Type: Never Flat Tire | **Color:** Cool Gray

Handle Length: 58.75 in | **Frame Material:** Steel | **No. of Wheels:** 1

Handle Material: Hardwood



SKU	Capacity Vol.	Tray Type
027-R6FF25	6 cu ft	Seamless Steel

MULTI-PURPOSE HAND TOOL SETS

Multi-Purpose Tool Sets

CRESCENT

1/4 in and 3/8 in Drive 6-Pt SAE/Metric Professional Tool Sets



Features:

- Contains a carefully selected assortment of hand tools needed for most industrial, mechanical, and consumer applications.
- Incredible access from long wrenches with narrow heads, adjustable wrenches and pliers, and a long-beam ratchets with small teardrop heads.
- Long nose and diagonal pliers with professional, ergonomic dipped grips wipe clean easily.
- Co-molded bit driver and screwdriver handles with ergonomic grip for improved performance.
- Shallow and deep SAE/metric 6-point full polish chrome sockets with stamped size markings for easy socket identification.
- 6 inch adjustable wrench with hex jaw design reduces slippage by gripping fasteners tightly.
- Manufactured from chrome alloy steel for better strength and longer tool life.
- Includes blow mold case for storage and organization.

Quantity: 180 pc

SKU	Includes	Drive Size
181-CTK180	(2) Ratchets; (3) Extensions Adapter; (51) Standard Sockets; (31) Deep Sockets Spark Plug Socket; (12) Combination Wrenches; (24) Hex Keys; (2) Pliers Adjustable Wrench; (4) Screwdrivers Magnetic Bit Driver; (46) Bits; Bit Adapter	1/4 in; 3/8 in

PIPE THREADING EQUIPMENT

Threaders Powered

RIDGID



Model 300 Power Drive Threading Machines

Features:

- Cam-action rear centering device turns with chuck.
- Two heavy-duty support bars.
- Speed grip chuck with replaceable jaw inserts.
- Forward/Off/Reverse switch and integral On/Off foot switch.
- Lightweight, portable design.
- Self-contained oil system with adjustable flow control.
- Ideal for use with RIDGID® roll groovers.
- Convert to portable threading machine with Model 141, 2-1/2 inch to 4 inch (36620), and Model 161, 4 inch to 6 inch (36630), both Sold Separately.
- Choose from 300 Power Drive Complete (15682 and 15722) or 300 Power Drive Only (41855 and 75075).

Speed: 36 RPM

Amps: 15 A

Power Cap.: 1/2 hp

Phase: Single

Includes: (1) 300PD, Tool Only, 115V 25-60Hz 38 RPM NPT (41855); ; (1) 300PD Clip-On Tool Tray (22638); (1) 811A 1/8 in to 2 in NPT Die Head, Self-Opening, RH (97065); (1) 1/2 in to 3/4 in Universal Alloy Die Set (47745); (1) 1 in to 2 in Universal Alloy Die Set (47750); (1) 360 Cutter Assy (42370); (1) 311 Carriage with Lever (68815); (1) #32 Transport Cart (42575); (1) 341 Reamer Assy (42365); (1) 1206 Stand (42360); (1) Oiler with One Gallon Premium Thread Cutting Oil (10883)

SKU	Pipe Cap.	Voltage
632-15682	1/8 in - 2 in	115 V AC

RIDGID

Model 700 Power Drive/Hand Held Threaders

Features:

- Heavy-duty hand-held power drive.
- Designed for RIDGID® Model 12-R die heads.
- Other RIDGID® die heads (00-R, 00-RB, 11-R) can be used using adapters.
- It can also be used with 258/258XL pipe cutters.
- Double-throw reversible switch.
- Spur gear reduction face gear drive, spring-loaded adapter pawls, and hardened steel spindle gear.
- Cast aluminum body.

Speed: 36 RPM

Amps: 13 A

Power Cap.: 1/2 hp

Phase: Single Phase; Universal

Includes: 700 Power Drive; Die Head/Dies Sold Separately



SKU	Pipe Cap.	Voltage
632-41935	1/8 in - 2 in	115 V

PLIERS & CUTTERS

Locking Pliers

IRWIN TOOLS

WISE-GRIP® Straight Jaw Locking Pliers

Features:

- Straight jaws provide maximum contact on flat, square, or hex work.
- Ideal for tightening, clamping, twisting and turning.

Test & Approvals: Meets federal Specifications: GGG-W-00649

Throat Depth: 1-3/4 in

Material: Alloy Steel



SKU	Jaw Opening	Overall Length
586-10R-3	1-5/8 in	10 in

IRWIN TOOLS



WISE-GRIP® The Original™ Curved Jaw Locking Pliers with Wire Cutters

Features:

- Curved jaw puts tremendous pressure on four points of any style nut or bolt head.
- Includes convenient wire cutter.
- Constructed of high-grade heat-treated alloy steel for maximum toughness and durability.
- Guarded release trigger quickly unlocks and protects from accidental release.
- Turn screw to adjust pressure and fit, stays adjusted for repetitive use.
- Hardened teeth are designed to grip from any angle.
- Hex key adjusting screw offers controlled release and draws materials tightly together.

Test & Approvals: Meets federal Specifications: GGG-W-00649

Throat Depth: 2-5/8 in

Material: Alloy Steel

SKU	Jaw Opening	Overall Length
586-10WR-3	1-7/8 in	10 in

Specialty Pliers

BEST WELDS



MIG Welding Pliers

Features:

- Strong, sharp welding pliers is a must tool for mig welding operations.
- Multipurpose tool with 8 functions resulting in more efficient time and production.
- Durable carbon steel construction paired with an easy to use spring operated handle.

Jaw Shape: Double-Edged

Material: Carbon Steel

SKU	Overall Length	Wire Diam
900-YS-50	21 cm	0.8 mm - 1.5 mm

Tongue & Groove Pliers

CHANNEL LOCK



420® Straight Jaw Tongue & Groove Pliers

Features:

- Pick a perfect pair of pliers with patented PermaLock® fastener which eliminates nut and bolt failures.
- Also, patented reinforcing edge minimizes stress breakage.
- Right angle laser heat-treated teeth provide a sturdy, long-lasting grip.

Jaw Length: 1-1/8 in | **Jaw Shape:** Straight | **No. of Adjustments:** 5

SKU	Overall Length	Jaw Opening
140-420-BULK	9-1/2 in	1-1/2 in

CHANNEL LOCK

440® Straight Jaw Tongue & Groove Pliers

Features:

- Pick a perfect pair of pliers with patented PermaLock® fastener which eliminates nut and bolt failures.
- Also, patented reinforcing edge minimizes stress breakage.
- Right angle laser heat-treated teeth provide a sturdy, long-lasting grip.

Jaw Length: 1-1/2 in | **Jaw Shape:** Straight

No. of Adjustments: 7

SKU	Overall Length	Jaw Opening
140-440-BULK	12 in	2-1/4 in

CHANNEL LOCK



Straight Jaw Tongue and Groove Pliers

Features:

- Powerful pliers with patented PermaLock® fastener eliminates nut and bolt failures.
- Slip-free undercut tongue-and-groove design.
- Reinforced jaw edge.

Jaw Length: 1-3/8 in

Jaw Shape: Straight

No. of Adjustments: 7

SKU	Overall Length	Jaw Opening
140-430-BULK	10 in	2 in

SHEARS, SCISSORS & SNIPS

Shears & Scissors



Inlaid® Bent Handle Industrial Shears

Features:

- Hot drop-forged nickel-plated blades are strong and durable.
- Configure the SET-EASY® pivot adjustment to match your preference.
- Handle rings designed to comfortably fit users' hands.
- Red dipped grip handle options available (W20P and W22P).
- Blunt safety point blades option available (W20SP).
- Left-hand option available (W20LH).

Cut Type: Shear Cut

Material: High Carbon Steel

Finish: Nickel Plated Blade

Handle Type: Bent

SKU	Cutting Length	Overall Length
186-W20	4.75 in	10.375 in

WRENCHES

Adjustable Wrenches



Adjustable Wrenches

Features:

- Hardened and tempered.
- Precision machined jaws and knurled adjusting worm.
- Plated to resist rust.

Test & Approvals: Meets or Exceeds Federal and ANSI Specifications

Head Angle: 15°

Head Width: Varies

Head Thickness: Tapered

Handle Type: I-Beam

Material: Drop-Forged Alloy Steel

Finish: Chrome Plated

SKU	Opening Size	Overall Length
103-01-012	1-1/2 in	12 in

Pipe Wrenches



Aluminum Straight Pipe Wrenches

Features:

- Nearly 40% lighter than comparable cast-iron models.
- Jaws and all other parts identical to Ridgid heavy duty wrenches.

Material: Aluminum

Jaw Material: Alloy Steel

Handle Type: I-Beam

SKU	Pipe Cap.	Overall Length	Wt.
632-31095	2 in	14 in	2-1/2 lb
632-31100	2-1/2 in	18 in	3-3/4 lb
632-31105	3 in	24 in	6 lb
632-31110	5 in	36 in	11 lb
632-31115	6 in	48 in	18-1/2 lb



Heavy-Duty Straight Pipe Wrenches

Features:

- Instant grip/release.
- Heat-treated replaceable jaw.
- Easy spin nonstick adjustment nut.
- Fully floating forged hook jaw.
- Replaceable hook and heel jaws.

Test & Approvals: Complies with Federal Specifications GGG-W651E, Type II, Class A

Material: Cast Iron Handle

Jaw Material: Steel

Handle Type: I-Beam

SKU	Pipe Cap.	Overall Length
632-31025	2-1/2 in	18 in
632-31030	3 in	24 in
632-31035	5 in	36 in

PERSONAL HYGIENE

Hand Cleaners



Hand Cleaner Towels

Features:

- Clean, citrus-scented formula loosens and dissolves industrial soils while leaving hands free from dryness and irritation.
- Rough Touch® blue towel locks in soil to prevent it from transferring back onto hands and surfaces.
- Hands are left feeling clean with no sticky residue and no rinsing required.

Odor/Scent: Citrus

Quantity: 72/Container; 6 PA/CA



SKU	Packing Type	W x L Per Sheet
253-42272	Wipe Container	10 in x 12 in

WASTE RECEPTACLES

Trash Can Liners



FLEX-O-BAG® Trash Can Liners and Contractor Bags

Features:

- Convenient large rolls of heavy industrial weight plastic bags in handy dispenser boxes and extra-long twist ties.
- Also included are Hold-Tite rubber bands to secure bag to can top; excluding Heavyweight Contractor Bags (HB42-20).
- No side seams to split and no gussets to weaken the bottom.
- Options available for Extra Heavy-Duty Contractor Bags, Heavyweight Contractor Bags, High Count Industrial Grade Trash Can Liners, and Tall Kitchen Bags.

Height: 56 in

Thickness: 3 mil

Color: Black

Grade: Extra Heavy-Duty Contractor Bags

Quantity: 30 EA/BX



SKU	Capacity Vol.	Width
795-HB55-30	- 55 gal	36 in

WIPING PRODUCTS

Towels & Wipers



Scott® Shop Towels

Features:

- Ideal for changing oil, refilling fluids and general maintenance.
- Strong, absorbent towel is great for wiping hands, tools and cleaning up grease, oil, grime and fluids.
- Works well when wet.

Scent: Unscented

Quantity: 30 per case

Packing Type: Roll



SKU	Color	W x L per sheet
412-75130	Blue	11 in x 10.4 in



WypAll® L30 Wipers

Features:

- Ideal for general-purpose, light-duty cleanups.
- Removes soils and liquids from face and hands.
- DRC (Double Re-Crepd) design provides greater surface softness.
- Reinforced grid weave delivers added strength for wet surface wiping and cleaning.

Scent: Unscented

Quantity: 90 per Pack/12 per Case

Packing Type: Pack



SKU	Color	W x L per sheet
412-05812	White	12 in x 12.5 in



WypAll® X80 Cloths

Features:

- Replaces shop towels and white cotton rags.
- Doesn't fall apart when tackling the most demanding jobs - even in solvents.
- Absorbs 30% more water significantly faster, and leaves 3X less lint than shop towels.
- Rinse and reuse - reduces waste and cost.
- Clean and consistent cloth every time.
- Portable dispensers allow you to keep product where you work.

Scent: Unscented



SKU	Color	W x L per sheet	Roll Length	Quantity	Packing Type	Used With
BRAG® Box						
412-41041	Blue	12.5 in x 16.8 in	—	160 wipers	Box	Dispenser 73900
Jumbo Roll						
412-41043	Blue	12.5 in x 13.4 in	530 ft	475 sheets per roll	1 Jumbo Roll per case	Dispenser 80596, 80579



X60 Cloth Wipers

Features:

- Absorbs more water and oil than rags for faster cleanup.
- Tough enough for big jobs, soft enough for face and hands if skin is uncompromised.
- Clean and consistent cloth every time.
- Portable, convenient point-of-use options enhance productivity.
- Available in a variety of convenient formats.

Scent: Unscented

Quantity: 10 BX/CA

Packing Type: Box

SKU	Color	W x L per sheet
412-34790	White	8.34 in x 16.8 in

CRAYONS



Paintstik® Original B® Solid Paint Markers

Features:

- Solid paint marker combines the durability of paint in the convenience of a crayon.
- Superior marking performance on oily, icy, wet, dry, or cold surfaces.
- Weather-resistant and UV-resistant for long-lasting marks.
- Works on rough, rusty, or dirty surfaces.
- Available in three different sizes-1 1/16 in (round/standard), 3/8 in (fine), and 1 in (king/jumbo).

Length: 4-3/4 in

Temp. Range: -50° F - 150° F

Flash Point: 204° C

Applicable Materials: Concrete and Stone; Glass; Lumber and Timber; Pipes and Tubes; Plastic; Rubber and Tires; Steel and Iron

Resistance: UV; Weather

Quantity: 12 EA/DZ

SKU	Color	Dia.
434-80220	White	1 1/16 in
434-80221	Yellow	1 1/16 in

MARKERS



Prime-Action™ Paint Markers

Features:

- Permanent, durable, fast-curing, industrial-strength paint is a great choice when you need your work to last.
- Rugged Prime-Action™ tip.
- Lead- and xylene-free paint.
- Marks on all surfaces, whether they're clean, dirty or oily.
- Reversible tip - switch easily between a bullet and chisel nib, depending on your needs.

Test & Approvals: ASTM D 4236

Temp Range: -50° F - 150° F

Capacity Vol.: 10 ml

Quantity: 12 EA/BOX

SKU	Color	Physical Form	Tip Size	Tip Type
900-PAINTMKR-YEL	Yellow	Liquid	3/16 in; 1/8 in	Poly; Chisel/Bullet
900-PAINTMKR-WHT	White	Liquid	2 mm x 4 mm	Poly; Reversible; Chisel/Bullet



BRITE-MARK® Medium Paint Markers

Features:

- Make permanent bright marks on metal, rubber, plastic, glass, concrete, leather, stone, wood, vinyl and more.
- Formula is not xylene-based.
- Valve actuated mechanism prevents paint in barrel from drying when cap is left off.
- Heavy duty aluminum body with large paint capacity.
- Ideal for color coding.
- Bullet tips are replaceable to ensure complete use of paint in each marker.
- Drying Time: 25 – 35 seconds.

Tip Size: Medium; Fiber #15

Tip Type: Bullet

Temp Range: 0° F - 350° F

Quantity: 12 EA/BX



SKU	Color	Physical Form
253-84002	Black	Liquid Paint
253-84003	White	Liquid Paint
253-84004	Yellow	Liquid Paint



Paint-Riter® Valve Action® Paint Markers

Features:

- Variety of colors for improved mark identification, quality control, and parts inspection.
- Fast-drying, permanent paint for immediate handling reduces work downtime.
- Xylene-free paint reduces user health risks and makes for a safer marking tool.
- Dura-Nib medium bullet tip resists wear to provide long marking life.
- Durable metal barrel and clip-cap reduce breakage and store easily in pocket.

Test & Approvals: Meets California VOC Regulations

Tip Size: 1/8 in

Tip Type: Medium Bullet

Temp Range: -50° F - 150° F

Quantity: 12 EA/BOX

SKU	Color	Physical Form
434-96820	White	Liquid
434-96821	Yellow	Liquid
434-96822	Red	Liquid
434-96823	Black	Liquid
434-96824	Orange	Liquid
434-96825	Blue	Liquid

SOAPSTONE HOLDERS



Standard Soapstone Holders

Features:

- Pocket clip.
- Positive lock adjustment.
- Spring tension friction guide for soapstone.

Used With: Standard Flat Soapstone | **Includes:** Pocket Clip; Soapstone

SKU	Shape	Length
900-SH-10	Flat	5 in

SOAPSTONES



Soapstones

Features:

- All white texture for excellent marking quality.
- Grain cut to ensure good strength and long service life.
- Marks will not contaminate welds and are easily removed.
- Low water content for increased hardness and resistance to breakage.

Length: 5 in

SKU	Shape	Color
900-FL-5	Flat	White
900-RD-5	Round	White

DERRICK TAPES



Derrick Surveying Tapes

Features:

- Chrome Clad® blade.
- Extra large winding drum provides rapid line recovery and permits tape line to be easily detached from reel.
- Special hook ring with ribbed face at zero.
- Leather thong is provided to use through eye at rear when tape is removed from reel.

Blade Thickness: 0.019 in | **Increment @ Scale:** 0.01 ft @ 1 ft

No. of Scales: 1 | **Blade Material:** Steel | **Blade Finish:** Chrome Clad®

End Type: Hook w/Ring | **Type:** Single Side Tape

SKU	Blade Length	Blade Width
182-C2276DN	100 ft	1/4 in

GAUGING TAPES



Atlas Chrome Clad®/Nubian® Double Duty Gauging Tapes

- Features:**
- Black markings bonded to steel and recessed beneath multiple layers of nickel and chrome electroplating provides greater resistance to wear and corrosion.
 - All tapes read right to left.
 - Heavy-duty frame designed for years of rugged use.
 - All frames include a grounding strap.
 - Plumb bob must be ordered separately.
- Test & Approvals:** Complies with ASTM Standard D 1085; Complies with API Standard 2545
- Blade Style:** D1
- Type:** Single Side Tape
- Increment @ Scale:** 1/8 in @ 1 ft

SKU	Wt.	Blade Length	Blade Width
182-CN1290SF590N	1.6 lb	25 ft	1/2 in

LEVELS



500 Series Magnetic I-Beam Levels

- Features:**
- Impact resistant acrylic mono vials offer superior durability.
 - All metal I-Beam frame offers superior durability and protects long-life accuracy.
 - High contrast vial surrounds improve vial visibility.
 - Ergonomic, grip zones enhance comfort and portability.
 - Impact resistant endcaps protect frame and vials.
 - Hang hole for ease of storage.
 - Made in U.S.A.
- Accuracy:** 0.0005 in/in
- No. of Vials:** 3
- Body Material:** Aluminum
- Width:** 1 in
- Height:** 2.25 in

SKU	Length	Magnification	Vial Material	Wt.
272-500M.48	48 in	High-Strength	Plastic	2.42 lb
272-500M.24	24 in	—	Acrylic Mono	—



Torpedo Levels

- Features:**
- Advanced frame design.
 - Magnetic-base level.
 - Top-read window.
 - Tri-vial versatility.
- Accuracy:** 0.001
- No. of Vials:** 3
- Vial Positions:** (1) 45°; (1) Level; (1) Plumb
- Vial Material:** Plastic
- Base Type:** Grooved; Magnetic
- Structure:** I-Beam
- Body Material:** Aluminum
- Width:** 1.6 in
- Height:** 0.6 in
- Wt.:** 0.31 lb

SKU	Length
272-581-9	9 in



True Blue® Heavy-Duty Magnetic Torpedo Levels

- Features:**
- High contrast e-BAND™ vials highlight the edge of the bubble.
 - V-Groove working edge for accurate alignment on pipe or conduit.
 - Aluminum frame with top read window.
- Accuracy:** 0.0005 in per in
- No. of Vials:** 3
- Vial Positions:** 45°; Level; Plumb
- Base Type:** Magnetic; V-Groove
- Body Material:** Aluminum

SKU	Length
272-em81.9	9 in

TAPE MEASURES

STANLEY

Powerlock® Tape Rules 1/2 in Wide Blade



- Features:**
- Cast-metal case is durable and suitable for heavy-duty use.
 - Mylar® polyester film extends life of entire blade.
 - Secure blade lock won't creep during measurements.
 - Corrosion-resistant Tru-zero end hook for accurate measurements.
- Graduations:** 1/16; 1/10
- No. of Scales:** 2
- Blade Material:** Steel
- Blade Finish:** Mylar® Polyester Film
- End Type:** Hook
- Case Material:** Zinc
- Return Motion:** Spring
- Type:** Single Side Tape

SKU	Blade Length	Blade Width
680-33-272	12 ft	1/2 in

STANLEY

Powerlock® Tape Rules Wide Blade



- Features:**
- Seven-foot blade standout.
 - Mylar® polyester film extends life of entire blade.
 - Chrome high-impact ABS case is job site tough.
 - Secure blade lock won't creep during measurements.
 - Corrosion-resistant Tru-zero end hook for accurate measurements.
- Graduations:** 1/16 in
- No. of Scales:** 1
- Blade Material:** Steel
- Blade Finish:** Polyester
- End Type:** Hook
- Color:** Metallic
- Case Material:** ABS Plastic
- Return Motion:** Spring
- Type:** Single Side Tape

SKU	Blade Length	Blade Width
680-33-425	25 ft	1 in

COCO MATS



Coco Mats

- Features:**
- Heavy-duty.
 - Tough absorbent fibers hold up under any type of foot traffic.
 - Mildew resistant.
- Height:** 1-1/2 in
- Material:** Densely Woven Fibers
- Color:** Natural Tan

SKU	Length	Width
103-AB-GDN-5	36 in	22 in

CUTTING TOOLS

Circular Saws



Classic Series Portable Corded Carbide Saw Blades

- Features:**
- Precision-ground teeth for smooth, accurate cuts.
 - Corrosion-resistant coating helps prevent rusting.
- No. of Teeth:** 24
- Applications:** Framing; Ripping; Decks
- Grind:** ATB
- Kerf:** 0.087 in
- Tooth Angle:** 19°
- Type:** Portable Corded Carbide Circular Saw Blade

SKU	Blade Diam	Arbor Diam
585-25130	7-1/4 in	5/8 in

DRILLING & FASTENING TOOLS

Drills

IRWIN
Unibit®



Unibit® High Speed Steel Fractional Self-Starting

Features:

- Single-flute cutting edge for greater control through steps.
- Hex shank prevents slipping in drill chuck.
- Also available with (TiN) coating for longer life.
- New SpeedPoint tip penetrates faster than previous Unibits and prevents walking.
- Ideal for drilling holes into thin materials such as stainless steel, copper, brass, aluminum, plastic and laminates.

Measurement Type: Fractional

Cutting Edge Material: HSS

SKU	Cutting Diam.	Material Thickness	No. of Steps
585-10231	1/8 in - 1/2 in	1/8 in	13
585-10234	3/16 in - 7/8 in	1/16 in	12
585-10235	1/4 in - 1-3/8 in	1/8 in	10

Wrenches

Milwaukee



M18 FUEL™ High Torque 1/2 in Impact Wrenches with Friction Ring

Features:

- REDLINK PLUS™ intelligence prevents damage to the tool and battery due to overloading or overheating.
- Bolt removal mode provides maximum nut-busting torque to break fastener free, then slows to 750 RPM for more control when removing fasteners.
- Premium rubber over-mold withstands corrosive materials and provides increased comfort when in use.
- Features a friction ring design to ensure quick and easy socket changes.
- REDLITHIUM™ batteries deliver more work per charge and more work over the life of the battery.
- LED light to illuminate the work area.
- Available as tool only or kit.

Voltage: 18 V DC

Batt. Type: Lithium-Ion

Speed: 1750 RPM

Cycle Rate: 2100 IPM

Torque: 1400 ft-lb

Control Type: Trigger

Handle Type: Pistol Grip

Includes: (1) M18 FUEL™ 1/2 in High Torque Impact Wrench with Friction Ring (Tool Only) (2767-20); (2) M18™ REDLITHIUM™ XC5.0 Resistant Battery Pack (48-11-1850R); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812); (1) Blow Mold Case

SKU	Drive Size	Drive Type
495-2767-22R	1/2 in	Square

Milwaukee



M18 FUEL™ w/ONE-KEY™ High Torque Impact Wrenches 3/4 in Friction Ring

Features:

- ONE-KEY™ compatible to customize, track and manage tool's performance and location.
- POWERSTATE™ brushless motor delivers up to 1200 ft-lb of fastening torque and 1500 ft-lb of nut-busting torque.
- Features a friction ring with thru-hole design to ensure quick and easy socket changes.
- Easily toggle up to four custom performance profiles that can be saved to the memory of the tool.
- Premium rubber over-mold withstands corrosive materials and provides increased comfort when in use.
- LED light to illuminate the work area.
- Available as tool only or kit.

Voltage: 18 V DC

Batt. Type: Lithium Ion

Speed: 1800 RPM

Torque: 1600 ft-lb

Control Type: Trigger

Handle Type: Pistol Grip

Includes: (1) M18 FUEL™ w/ONE-KEY™ High Torque Impact Wrench 3/4 in Friction Ring Bare Tool (2864-20); (2) M18™ REDLITHIUM™ XC5.0 Resistant Capacity Battery Pack (48-11-1850R); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812)

SKU	Drive Size	Drive Type
495-2864-22R	3/4 in	Square

FINISHING TOOLS

Grinders

DEWALT



Small Angle Grinders

Features:

- 11 Amp AC/DC 11,000 RPM motor designed for faster material removal and higher overload protection.
- Low profile gear case allows tool to fit into tight spaces.
- Quick-Change™ Wheel Release provides easier and quicker wheel removal without the need for a wrench.

Watts: 1,400 W

Speed: 11,000 RPM

Spindle Thread: 5/8 in - 11

SKU	Wheel Dia	Amps	Control Type	Includes
115-DWE402	4-1/2 in	11 A	Paddle Switch with Lock-Off	2-Position Side Handle; 4-1/2 in One-Touch™ Type 27 Guard
115-DWE402N	4-1/2 in	11 A	Paddle Switch with No Lock-On	One-Touch™ Guard; 2-Position Side Handle; Wrench

DEWALT



1-1/2 in Die Grinders

Features:

- Motor provides high power and speed for all 1-1/2 in grinding applications.
- AC/DC capacity works off welding machines and generators for increased productivity and versatility.
- Precision 1/4 in collet securely holds all proper accessories (1/8 in reducing sleeve as optional accessory).

Watts: 350 W

Amps: 4.2 A

Speed: 25,000 RPM

Control Type: Paddle; No-Locking

Includes: (2) Wrenches; Collet

SKU	Collet Size	Wheel Diam
115-DWE4887N	1/4 in	1-1/2 in

CLOTHING PROTECTION

Coveralls & Overalls



Tyvek® 400 Coveralls

Features:

- Composed of Tyvek® 400 flash-spun, high-density polyethylene which creates a unique, nonwoven material.
- Offers inherent barrier against particles down to 1.0 micron in size.
- Protection built into the fabric itself, no films or laminates to abrade or wear away.
- Comfort fit design enables a greater range of movement while stretching and bending with reinforcement in high stress areas.
- Available in many different styles.

Color: White

Resistance: Hazardous Aerosols/ Dry Particles; Non-Hazardous Light Liquid Splash

Applications: Agriculture; Asbestos Abatement; Environmental Cleanup; Food Processing; General Maintenance/Operations; Mold Remediation; Spray Painting; Wind Turbine Manufacturing



SKU	Size Group	Material	Style
251-TY120S-L	Large	Tyvek® 400	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY127S-L	Large	Tyvek® 400	Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap
251-TY120S-XL	X-Large	Tyvek® 400	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY127S-XL	X-Large	Tyvek® 400	Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap
251-TY127S-2XL	2X-Large	Tyvek® 400	Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap
251-TY120S-2XL	2X-Large	Tyvek® 400	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY120S-3XL	3X-Large	Tyvek® 400	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY127S-3XL	3X-Large	Tyvek® 400	Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap

EAR PROTECTION

Earplugs



3M™ E-A-R™ UltraFit™ Earplugs

Features:

- No roll down earplugs.
- The patented E-A-R™ form foam tip is shaped and sized to mold comfortably to fit virtually every sized canal.
- The unique foam actually softens and becomes more pliable with body temperature, the seal and comfort increases the longer the plugs are worn.


Test & Approvals: CSA Class AL

Color: Blue/Yellow

Type: Corded

Packing Type: Poly Bag

Quantity: 100 pair per box

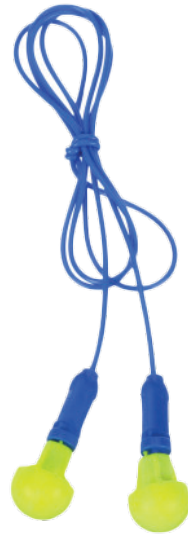

SKU	Noise Reduction	Body Material
247-318-1001	28 dB	Polyurethane



3M™ E-A-R™ Push-Ins™ Earplugs

Features:

- Conforms to oval shape of ear.
- No rolling or touching plug portion during insertion.
- Proprietary, premolded, triple-flange earplug design inserts easily and provides a comfortable fit for a reusable earplug.

Color: Yellow

Type: Corded

Packing Type: Poly Bag

Quantity: 100 Pairs



SKU	Noise Reduction	Body Material
Vinyl Cord		
247-340-4004	25 dB	Elastomeric Polymer



Laser Lite® Disposable Earplugs

Features:

- Vibrant colors make protection visible.
- Self-adjusting polyurethane foam expands to fit virtually every wearer.
- Contoured T-shape for easy insertion and wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.

Test & Approvals: ANSI S.3.19-1974;29 CFR 1910.95;9001:2008 - ISO

Packing Type: Plastic Bag



SKU	Noise Reduction	Body Material	Type	Quantity
154-LL-1	32 dB	Polyurethane Foam	Uncorded	200 pairs/box
154-LL-30	32 dB	Polyurethane Foam	Corded	100 pairs/box



Max Lite® Disposable Earplugs

Features:

- Low pressure polyurethane foam expands gently for comfortable long-term wear.
- Contoured T-shape for easy insertion and wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.

Test & Approvals: ANSI S.3.19-1974

Packing Type: Poly Bag



SKU	Noise Reduction	Body Material	Type	Quantity
154-LPF-1	30 dB	Foam	Uncorded	200 pair per box
154-LPF-30	30 dB	Foam	Corded	100 pair per box



Max® Disposable Earplugs

Features:

- Contoured design easier to insert, resists tendency to back out of ear canal.
- Polyurethane foam enhances comfort, especially for long-term wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.
- Bell shape delivers maximum in-ear comfort.

Test & Approvals: ANSI S.3.19-1974;29 CFR 1910.95;9001:2008 - ISO

Packing Type: Plastic Bag



SKU	Noise Reduction	Body Material	Type	Quantity
154-MAX-1	33 dB	Polyurethane Foam	Uncorded	200 pairs/box
154-MAX-30	33 dB	Polyurethane Foam	Corded	100 pairs/box

EYE PROTECTION

Safety Glass Parts & Accessories



Lens Cleaning Towelette Dispensers

Features:

- Pre-moistened with C-Clear Anti-Fog, Anti-Static formula for use on plastic, polycarbonate and glass lenses.
- Strategic placement of towelette dispensers throughout a facility will promote proper lens cleaning habits and extend the life of prescription and non-prescription eyewear.
- Contains no silicone.
- Safe and effective with all lens coatings including Anti-Reflective Coating.
- Also good for use on goggles, face shields, CRT screens and microscopes.

Width: 5 in



SKU	Includes	Length
101-70-AB	100 Packaged Towelettes	8 in

Safety Glasses



V30 Nemesis™ Safety Glasses

Features:

- Safety glasses feature a sporty, flexible, lightweight design.
- Wraparound frame has a base curve of 8 that extends the range of peripheral protection, as well as soft touch temples for comfort.
- Patented FLEX-DRY* nose piece designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose for long-term comfort.
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection.
- Includes neck cord for securing them, so that the glasses are ready to protect at a moment's notice.

Test & Approvals: ANSI/ISEA Z87.1+

Lens Material: Polycarbonate

SKU	Lens Tint	Lens Coating/Shade	Resistance
412-22475	Smoke	Anti-Fog	99.9% UVA/UVB/UVC; Fog
412-25676	Clear	Uncoated	99.9% UVA/UVB/UVC
412-25679	Clear	Anti-Fog	99.9% UVA/UVB/UVC; Fog
412-25688	Smoke Mirror	Mirror	99.9% UVA/UVB/UVC

FIRE, GAS & WATER PROTECTION

Detectors

Honeywell
THE POWER OF CONNECTED

Clip Single-Gas Detectors

Features:

- One button operation.
- Operates up to two years use without calibration, sensor replacement, or battery recharging/replacement.
- Wide angle flash which alerts simultaneously with audible and vibrating alarm.
- Automatic logging of the 35 most recent gas events.
- Compatible with IntelliDoX, Fleet Manager II Software.

Test & Approvals: IP66/IP67 Rated

Gas Type: Hydrogen Sulfide

Temp. Range: -40° F - 122° F

Sound Level: 95 dBA

Display Type: LCD

Power Source: Lithium Battery

Run Time: 2 Years



SKU	Includes	Sensor Type
Alarm Setting: Low 10 ppm; High 15 ppm		
126-BWC2-H	Specified Sensor; Stainless Steel Alligator Clip; Concussion-Proof Housing; Test Cap; Instructions	Surecell™

HAND PROTECTION

Gloves

Ansell

11-600 Palm-Coated Gloves

Features:

- Designed for light and delicate applications in dry environments that require high levels of dexterity.
- Offers comfortable and exact handling of small objects.
- Light-duty, multi-purpose, industrial gloves.
- Available in black or white.

Test & Approvals: ANSI 3 Abrasion; ANSI A1 Cut; CE

Coating: Polyurethane

Style: Palm Coated

Cuff Style: Knit-Wrist

Material: Nylon; Polyurethane



SKU	Size Group	Lining
012-11-600-10-BK	10	Nylon
012-11-600-9-BK	9	Nylon

PIP
PROTECTIVE INDUSTRIAL PRODUCTS

MaxiFlex® Ultimate™ Nitrile Coated Micro-Foam Grip Gloves

Features:

- Ideal for precision handling in dry environments.
- MicroFoam Nitrile coatings are compatible with light oils and will provide a good grip and excellent abrasion resistance.
- Knit wrist helps prevent dirt and debris from entering the glove.
- Patented micro-foam nitrile coating offers 360° breathability.
- Mimics the "hand at rest", reducing hand fatigue and increasing comfort.
- The micro-cup finish allows for a controlled and optimized grip.

Coating: Nitrile

Style: Palm and Finger Coated; Seamless Knit

Cuff Style: Knit-Wrist

Color: Black; Gray

Material: Nitrile; Nylon with Lycra®



SKU	Size Group	Lining
112-34-874/L	Large	Nylon with Lycra®
112-34-874/XL	X-Large	Nylon with Lycra®

Ansell

92-600 Nitrile Powder-Free Disposable Gloves

Features:

- Made with TNT Chemical Splash Resistance Technology for superior protection against harmful chemical splashes.
- Super soft nitrile provides a comfortable, silky feel for extended wear.
- Proprietary formulation provides robust durability in a softer glove.
- Silicone-free design is paint, finish, and coating friendly.

Test & Approvals: FDA21 CFR 177-2600-US Food Contact Approved

Thickness: 4.9 mil Palm; 5.5 mil Finger

Cuff Style: Beaded; Standard

Color: Green



SKU	Size Group	Material
012-92-600-8.5-9	Large	Nitrile; Type I Latex

HEAD/FACE PROTECTION

Hard Hats & Caps

MSA
The Safety Company

Skullgard® Protective Caps and Hats

Features:

- Strong, protective hats offer outstanding protection in hot, dangerous industries.
- Tested to radiant heat loads producing temperatures up to, but not exceeding, 350F.
- Smooth crown allows easy use of MSA welding equipment.
- Heavy duty construction produces a sturdy, reliable product for long-lasting use.

Test & Approvals: ANSI/ISEA Z89.1-2009 (Class G, Type I)

Adjusting Method: Ratchet

Material: Phenolic

Applications: Confined Space; Food Processes; Manufacturing; Painting; Sanding & Grinding; Steel Smelting Foundries; Working at Heights; Welding

Type: Non-Slotted

Size Group: Standard; 6-1/2 to 8



SKU	Color	Suspension
454-475407	Natural Tan	Fas-Trac® Ratchet

MSA
The Safety Company

V-Gard® Protective Hats

Features:

- Convenient caps and hats provide comfortable, lightweight protection.
- Polyethylene shell provides superior impact protection.
- Available with Fas-Trac® III or Staz-On® suspension.

Test & Approvals: Meets or Exceeds the Applicable Requirements for a Type I Helmet (top impact) outlined in ANSI Z89.1 2003, Class E and G

Adjusting Method: Ratchet

Material: Polyethylene

Applications: Arc Flash; Confined Space; Manufacturing; Working at Heights; Welding; Among others

Type: Slotted

Size Group: Standard; 6-1/2 to 8



SKU	Color	Suspension
Hat Style		
454-475369	White	Fas-Trac®

Welding Helmet Parts & Accessories

BEST WELDS®



Cover Lens

Features:

- Convenient protective cover lens is resistant to abrasion, pitting, spatter, chemicals and solvents.
- Optically correct and balanced.
- Provides superior welding lens protection.

Test & Approvals: OSHA

Resistance: Scratch; Static

Window Size: 2 in x 4.25 in

Material: 70% CR-39 Plastic

Color: Clear



SKU	Style	Lens Coating/ Shade
901-SP-1	Cover Lens	Clear

Welding Helmets

JACKSON

Insight Digital Variable ADF Welding Helmets

Features:

- Variable shades to shield and protect eyes from radiant energy during weld.
- Viewing area offers unobstructed views during all stages of welding process without lifting hood.
- Sensitivity and delay adjustments for different tasks and duration.
- Weld and grind modes.
- Four independent sensors reduce blockage possibility.
- Operates with lithium battery power.
- Low-battery indicator light.

Test & Approvals: ANSI Z87.1-2010; CSA Z94.3 Compliant, CE (DIN Plus)

Window Size: 3.93 in x 2.36 in

Size of Cartridge: 5.25 in x 4.5 in

Material: Thermoplastic

Suspension: Ratchet

Used With: HSL 100 shell; Lithium batteries; #40710 - ADF; #46128 - ADF Cartridge; #41594 - Safety Plate; #41589 - Plate Kit; #20696 - Headgear



SKU	Lens Coating/Shade	Color
HSL 100 shell—The HSL 100 shell is perfect for tight spaces and has an extended front for increased throat protection.		
138-46129	9 to 13	Black

HEAT STRESS PROTECTION

Activity Drinks



G Series O2 Perform® Thirst Quencher Instant Powders

Features:

- Hydrates with electrolytes that help them replace the carbs, electrolytes and fluids they lose when they sweat.
- Carbohydrates help stimulate rapid fluid absorption and fuel the active body.

Capacity Vol.: 21 oz

Quantity: 32 per case



SKU	Package Yield	Flavor	Packing Type
308-03944	2.5 gal	Fruit Punch; Lemon-Lime; Orange; Frost Riptide Rush	Pack
308-03969	2.5 gal	Lemon-Lime	Pouch
308-33673	2.5 gal	Frost Riptide Rush	Pouch
308-33690	6 gal	Fruit Punch	Pouch
308-33691	2.5 gal	Fruit Punch	Pouch



Powder Sticks

Features:

- Powdered mix contains the same electrolyte formula found in the original Gatorade.
- The refreshing choice when you need to replace electrolytes lost from sweat while performing rigorous physical activity.
- Take these convenient packets with you anywhere

Packing Type: Powder Stick

Package Yield: 20 oz

Capacity Vol.: 1.23 oz

Quantity: 80 per case



SKU	Flavor
308-04702	Fruit Punch
308-04701	Orange
308-04700	Lemon Lime



Qwik Stik® ZERO Sugar

Features:

- Great-tasting sugar-free electrolyte replacement.
- Ideal for diabetics and carb-conscious consumers.

Packing Type: Pack

Package Yield: 20 oz

Capacity Vol.: 0.11 oz

SKU	Flavor	Quantity
690-159060100	ZERO Sugar Orange	500 per case
690-159060101	ZERO Sugar Mixed Berry	500 per case
690-159060102	ZERO Sugar Fruit Punch	500 per case
690-159060106	ZERO Sugar Lemon-Lime	500 per case
690-159060107	ZERO Sugar Grape	500 per case
690-159060119	ZERO Sugar Fruit Punch; ZERO Sugar Mixed Berry; ZERO Sugar Orange; ZERO Sugar Strawberry Lemonade	200 per case



Squeeze® Freezer Pops

Features:

- Great way to cool down the body during hot or fatiguing work situations.
- Just freeze and serve to administer a tasty way to provide electrolytes to any work crew.
- Formulated to be absorbed significantly faster than water, allowing the body to replenish electrolytes and minerals for proper hydration.

Flavor: Cherry; Grape; Lemon-Lime;

Mixed Berry; Orange

Packing Type: Tube

Quantity: 150 EA/CA



SKU	Package Yield	Capacity Vol.
690-159200201	3 oz	3 oz

LOCKING DEVICES

Padlocks & Cables



No. 175 Combination Brass Padlocks

Features:

- Set-your-own combination convenience.
- Resettable to any of 10,000 personalized combinations.

Shackle Diam: 5/16 in

Shackle Inner Width: 1 in

Color: Brass

Shackle Material: Hardened Steel



SKU	Code Format	Shackle Length
470-175LH	4 Step Dial	2-1/4 in

RESPIRATORY PROTECTION

Cartridge Respirator Parts & Accessories



3M™ Particulate Filters

Features:

- Lightweight and easy to breathe through.
- Bayonet compatibility allows use with many 3M™ half and full facepieces and certain 3M™ Scott™ full facepieces.
- Assortment of filters available for a wide range of applications.

Test & Approvals: NIOSH

Filtration Grade: P100

Usage: Welding; Gas Cutting; Brazing; Metal Pouring; Soldering;

Cadmium; Lead; Arsenic; Asbestos

Color: Magenta

SKU	For Model	Resistance
142-2091	3M™ Cartridges 6000 Series; Reusable Respirators	Oil and Non-Oil Based Particles
142-2097	3M™ Cartridges 6000 Series; Reusable Respirators	Nuisance Level Organic Vapor



3M™ Organic Vapor Cartridge

Features:

- Swept-back design allows an enhanced field of view and comfort.
- Bayonet compatibility allows use with many 3M™ Half and Full Facepiece Respirators.
- Wide range of applications reduces inventory needs.
- Simple installation and usage requirements reduces training requirements.

Test & Approvals: NIOSH approved for protection against certain organic vapors

Resistance: Organic Vapors (OV)

Usage: Contaminants

SKU	Type	For Model
142-6001	Cartridge Only	3M™ Half/Full Facepieces 6000, 6500, 7000, 7500, 7800S, and FF-400 Series with bayonet filter holders



3M™ Organic Vapor/Acid Gas Cartridge/Filter

Features:

- Unique design for enhanced comfort and visibility.
- Particulate filter is permanently attached to cartridge for easy, one-step assembly.

Filtration Grade: P100

SKU	For Model	Resistance	Usage	Color
142-60923	3M Reusable Respirators	Acid Gases; Organic Vapors	Contaminants	Magenta/Yellow
142-60926	3M Reusable Respirators	Multi-Gas/Vapor	General Protection	Magenta/Olive

Cartridge Respirators



3M™ Full Facepiece Reusable Respirators

Features:

- Unique center adapter directs exhaled breath and moisture downward, and helps reduce debris from depositing in the valve.
- Smooth surface allows for quick and easy cleaning.
- Large lens provides a wide field of view and excellent visibility.
- 3M™ Cool Flow™ Valve provides cool, dry comfort.
- Lightweight well-balanced design and silicone face seal for enhanced comfort and durability.

Test & Approvals: NIOSH Approved for protection against certain organic vapors

Resistance: Gases; Vapors; Particulates

Includes: One Mask



SKU	Body Material	Size Group
142-6800	Silicone; Thermoplastic Elastomer	Medium
142-6900	Silicone; Thermoplastic Elastomer	Large

Disposable Respirators



3M™ Particulate Respirators

Features:

- Two-strap design with single point attachment helps provide a secure fit.
- Adjustable noseclip reduces eyewear fogging and helps ensure a better fit and seal.
- Lightweight construction enhances worker comfort and wear time.
- Patented filter media with advanced electrostatically charged microfibers help make breathing easier and cooler for enhanced user comfort.

Test & Approvals: Meets NIOSH 42 CFR 84 N95 Requirements. TC-84A-0007

Size Group: One Size

Resistance: Dust; Non-Oil Particulates

Protected Area: Half Facepiece

Suspension: Two Fixed Straps



SKU	Usage	Quantity	Includes
142-8210	Grinding; Sanding; Sweeping; Bagging; Other Dusty Operations	20/bx	Adjustable Noseclip
142-8511	Grinding; Sanding; Sweeping; Bagging; Other Dusty or Arid Operations	10/bx	3M™ Cool Flow™ Valve; M Noseclip

TRAFFIC SAFETY

Safety Tapes



Economy Barrier Tape

Features:

- Sturdy safety tape.
- Repeat wording clearly identifies hazard.
- Bright colors and Bolder Print to attract attention.
- Durable, yet easily disposable.

Width: 3 in

Length: 1000 ft

Material: Polyethylene



SKU	Depicted Text	Color
101-R10003	Danger	Red
101-Y10003	Caution	Yellow

FILLER METALS

MIG Welding Wires



ER70S-6 MIG Premium Welding Wires

Features:

- Mild steel welding wire that contains high levels of manganese and silicon which produces high quality welds when used on dirty, oily or rusty steel.
- The high silicon content increases the fluidity of the weld pool, creating a smoother bead appearance resulting in minimal post-weld grinding.
- Engineered to provide porosity-free, x-ray quality welds at the highest tensile strength of all the plain carbon steel wires.

Test & Approvals: AWS A5.18:05; CSA W48:14

Dia.: 0.035 in



SKU	Tensile Strength	Material	Wt.
900-70S6035X33S	85,000 psi	Carbon Steel	33 lb
900-70S6035X44S	85,000 psi	Carbon Steel	44 lb

Welding Stick Electrodes



Mild Steel Electrodes

Features:

- Excellent arc starting and stability.
- For best performance, store in rod oven at recommended temperature.

Test & Approvals: AWS A5.1

Material: Carbon Steel

SKU	Length	Type
900-7018-18X50	14 in	E7018

WELDING & CUTTING ACCESSORIES

Dry Rod Ovens



Electrode Ovens

Features:

- Includes external thermostat control.
- Each oven is tested and heated to rated temperature before shipping.

Test & Approvals: EN60974-1

Digital Thermometer: No



SKU	Capacity	Voltage	Watts	Temp Max	Temp Min
900-BW-ELECTRODE-OVEN-ET	10 lb	110 V	80 W	300° F	175° F
900-20LB-ELECTRODE-OVEN	20 lb	110 V	220 V	300° F	85° F
900-50LB-ELECTRODE-OVEN	50 lb	110 V	220 V	300° F	175° F

Welding Cables & Power Cables



Welding Cables

Features:

- Custom lengths available.
- Custom assemblies available.
- Resistant to oil, chemicals, and solvents.

Test & Approvals: RoHS

Style: Welding Cable

Amps: Consult Ampacity Chart

Temp Range: -50° C (-58° F) - 105° C (221° F)

Jacket Material: EPDM

Number of Conductors: 1

Insulation Thickness: 0.08 in

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper

SKU	Cable/Wire Description	Includes
911-1/0-500	1/0 AWG x 500 ft	Cable Only
911-2/0-500	2/0 AWG x 500 ft	Cable Only

CENTRAL WELDING SUPPLY

www.centralwelding.com · (800) 697-0128

INDUSTRIAL CATALOG

2023

