

CENTRAL WELDING SUPPLY

www.centralwelding.com • (800) 697-0128

2023



CONSTRUCTION

CATALOG

TABLE OF CONTENTS

BONDED ABRASIVES	3	CARTS & TRUCKS	22
COATED ABRASIVES	3	FLANGE PINS & ALIGNERS	22
NON WOVEN ABRASIVES.....	4	LEVELS	22
WIRE BRUSH ABRASIVES	4	SQUARES.....	23
ADHESIVE PRODUCTS	5	COVERING PRODUCTS	23
SEALING PRODUCTS	6	COMPRESSORS, BLOW GUNS, HOSES & FITS	23
CLEANING PRODUCTS	7,18	CORDLESS TOOL BATTERIES & CHARGERS	23, 24
LEAK DETECTORS & PENETRANTS	7	CUTTING TOOLS	24-28
LUBRICANTS & PENETRANTS.....	8-11	DRILLING & FASTENING TOOLS	28-30
BATTERIES.....	11	FINISHING TOOLS.....	31,32
COOLERS & CHESTS	11	HEATING TOOLS	32
CLAMPS & VISES.....	11,12	MULTI-PURPOSE POWER TOOLS	32,33
HAMMERS, SLEDGES, MALLETS & AXES	12	CLOTHING PROTECTION	33
LAWN & GARDEN TOOLS.....	13,14	EAR PROTECTION	34,35
PIPE THREADING EQUIPMENT.....	15	EYE PROTECTION	35,36
PLIERS & CUTTERS	15,16	FIRE, GAS & WATER PROTECTION.....	36,37
PRYING TOOLS	17	FIRST AID SAFETY	37
STAPLERS & RIVETERS	17	HEAD/FACE PROTECTION	37-40
WRENCHES	17,18	HEAT STRESS PROTECTION	40,41
PERSONAL HYGIENE	19	LOCKING DEVICES.....	41
WASTE RECEPTACLES	19,20	RESPIRATORY PROTECTION	41-44
WIPING PRODUCTS.....	20	SAFETY STORAGE.....	44,45
CRAYONS	20	SOLDERING & BRAZING.....	45
MARKERS	21	TORCH & WEED BURNERS	45
SOAPSTONE HOLDERS	21,22	WELDING & CUTTING ACCESSORIES.....	46
SOAPSTONES.....	22		

BONDED ABRASIVES

Resin Bonded Abrasives



**3M™ Cubitron™ II
Depressed Center
Grinding Wheel**



Features:

- Fast cutting, long lasting.
- Great for heavy grinding and weld removal.

Arbor Size: 5/8 in - 1 1/2

Grit: 36

Speed: 13,300 rpm

SKU	Tool Shape	Dia.	Thickness
405-076308-64320	T27 Quick Change	4-1/2 in	1/4 in



**3M™ Cubitron™ II
Fibre Disc 982C**



Features:

- Ceramic metal cutting wheels deliver aggressive material removal and a long life. Ideal for cutting rod, steel plates, sheet metal, pipe, rebar, and more.

Thickness: 0.04 in

Arbor Size: 7/8 in

Speed: 10100 RPM

SKU	Dia.
115-DWA8953F	6 in



**Original Slicer®
Cutting Wheels**



Features:

- Extremely fast rate of cut.
- Designed with two full layers of high strength fiberglass for safety.
- Consistent performance time after time.
- Burr-free, cool cutting.

Thickness: 0.040 in

Arbor Size: 7/8 in

Grit: 60

Speed: 10200 RPM

SKU	Tool Shape	Dia.
Choice Cuts™ Series 469-655339000	Type 1	6 in



**Slicer Plus® High
Performance Cutting Wheels**

Features:

- Formulated to provide very long life and very aggressive cool cutting.
- Specially engineered with coated aluminum oxide proprietary bond for the toughest applications.
- Designed for delivering thicker sectional cuts in steel, stainless steel, heavy rebar and harder metals.
- Suitable for use on heavy wall pipe and angle iron.

Thickness: 0.045 in

Arbor Size: 7/8 in

Grit: 60

Speed: 10200 RPM

SKU	Tool Shape	Dia.
469-655998000	Type 1	6 in

COATED ABRASIVES

Coated Disc Abrasives



**Cubitron™ II 982C
Fibre Discs**

Features:

- Sturdy fibre discs employ precision ceramic grain and last up to twice as long.
- Discs run cool and wear evenly.
- Can be run wet or dry.

Grit: 36

Body Material: Fiber

Applications: Beveling; Heavy Grinding; Weld Removal

Applicable Materials: All Metals; Aluminum; High Nickel Alloy; Stainless Steel; Titanium; Zirconium

SKU	Dia.	Arbor Diam.	Speed	Mounting	Quantity
405-051141-27400	4-1/2 in	7/8 in	13300 rpm	TN	25 DC/CT
405-051141-27401*	5 in	7/8 in	12000 rpm	Center Hole	100 EA/CA
405-051141-27402*	7 in	7/8 in	8600 rpm	Center Hole	100 EA/CA
405-051141-27404	5 in	—	12000 rpm	TN	100 EA/CA
405-051141-27405	7 in	5/8 in	8600 rpm	TN	100 EA/CA
405-051141-27425	4-1/2 in	—	13300 rpm	TN	25 EA/CT

Coated Flap Disc Abrasives



Tiger® Big Cat® High Density Flap Discs

Features:

- A thicker disc with larger flaps which conforms to curved and irregular surfaces while producing a consistent finish.
- 30 to 40 percent longer life than standard flap discs.
- Ideal for a working angle less than 15 degrees.

Speed: 12000 rpm


Abrasive Material: Zirconia Alumina

Tool Shape: Type 27

SKU	Dia.	Grit	Arbor Diameter
804-50803	4-1/2 in	40	7/8 in
804-50808	4-1/2 in	40	—

NON WOVEN ABRASIVES

Non Woven Pad Abrasives

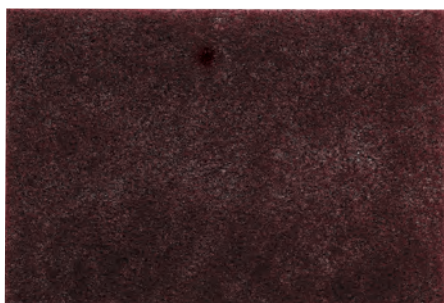

Scotch-Brite™ Hand Pad 7447

Features:

- Hand pads are a great alternative to steel wool, similar performance without the shredding, rusting, or splintering.
- May be used by hand, with a hand pad block, or on an in-line sander.
- Available in a variety of grades, including aluminum oxide, nepheline syenite, or silicon carbide abrasive materials.

Abrasive Material: Aluminum Oxide

Applications: Blending; Cleaning; Deburring; Finishing; Scuffing; Surface Preparation

Quantity: 20 EA/BX

SKU	Roughness Grade	Color
405-048011-04029	Very Fine	Maroon

WIRE BRUSH ABRASIVES

End Brushes



Crimped Wire Solid End Brushes

Features:

- Light-duty cleaning in corners and hard to reach areas.
- Solid End Construction.
- Very flexible brushing action.

Trim Length: 1 in

Speed: 22,000 RPM

Stem Diam: 1/4 in

Stem Length: 5/8 in



SKU	Brush Diam	Wire Size
804-10021	1 in	0.006 in

Knot Wire End Brushes

Features:

- Hollow-end wire brush.
- Rugged knot-type construction provides aggressive, high-impact action for severe applications.
- Ideal for cleaning in recessed areas.

Trim Length: 7/8 in

Speed: 22000 RPM

Stem Diam: 1/4 in

Stem Length: 5/8 in



SKU	Brush Diam	Wire Size
804-10027	1-1/8 in	0.014 in
804-10028	1-1/8 in	0.020 in

Scratch Brushes



Hand Scratch Brushes

Features:

- Heavy-duty industrial brushes.
- Wire fill and length is unsurpassed.
- Durable wood handle.

Bristle Material: Carbon Steel

Block Material: Wood

Bristle Rows: 4 X 16

SKU	Handle Type	Handle Material
102-387	Shoe	Wood

Wheel Brushes



Stringer Bead Wheel Brushes

Features:

- Very narrow face design primarily for weld cleaning and to access hard-to-reach areas.

Arbor Diam: 5/8 in - 11

Arbor Thread: 5/8 in - 11

SKU	Bristle Material	Bristle Diam	Dia.	No. of Knots	Face Width
102-4S58	Carbon Steel	0.02 in	4 in	30	4 in
102-4S58S	Stainless Steel	0.02 in	4 in	30	1/4 in
102-6S58	Carbon Steel	0.02 in	6 in	48	6 in



Roughneck® Max Stringer Bead Wheels

Features:

- Delivers unmatched weld cleaning performance by maximizing life, efficiency, and consistency.
- Improved feel and comfort during use makes brush operation effortless.
- Stronger, sharper wire delivers consistency and performance you can count on.
- Recommended for cleaning root pass welds, surface prep, and other cleaning applications.

Dia.: 4 in

No. of Knots: 32

Face Width: 3/16 in

SKU	Bristle Material	Bristle Diam	Arbor Diam
804-13131	Steel	0.020 in	5/8 in-11 UNC
804-13138	Stainless Steel	0.020 in	5/8 in to 11 UNC



Roughneck® Stringer Bead Wheels

Features:

- Narrow face brush is suitable for cleaning root and hot passes.
- Effectively reaches into corners.
- Constructed from premium quality wire.

Arbor Diam: 5/8 in-11 UNC

Face Width: 3/16 in

SKU	Bristle Material	Bristle Diam	Dia.	No. of Knots
804-08756	Steel	0.020 in	5 in	38
804-09000	Steel	0.020 in	7 in	56
804-09400	Steel	0.020 in	6 in	56

ADHESIVE PRODUCTS

Adhesives & Glues



3M™ Super 77™ Multipurpose Spray Adhesive

Features:

- Multipurpose spray adhesive bonds to many surfaces.
- Great for use in home, office and craft projects.
- Versatile, quick drying and transparent.
- Fast, permanent bond provides quick results.
- Aggressive tack provides high initial grab with enough time to position materials properly.
- Industrial sized can provides high coverage.
- Resists dripping or running when used in vertical applications.
- Also available with Low VOC.

Adhesive Tensile Shear: 300 psi

Tensile Strength: 300 psi

Chemical Compound: Synthetic Elastomer

Working Time: 15 sec to 15 min



SKU	Capacity vol.	Color
405-021200-21210	16.75 oz	Clear

SEALING PRODUCTS

Sealants



567™ PST® Thread Sealants, High Temperature

Features:

- Instant thread sealant for taper/ taper threads and fittings.
- Great choice for high temperature and high pressure applications.
- Controlled strength for easy disassembly with hand tools.
- Prevents leaks, does not shrink, crack, creep, or shred.
- Provides excellent solvent resistance.
- Eliminates galling on stainless steel.

Test & Approvals: ABS; NSF/ANSI 61; UL Classified for U.S.; ULC Classified for Canada; CFIA Listed

Temp. Range: -65°F - 480°F

Color: Off White

Applications: For Metal Parts

Resistance: Solvent

Full Cure Time @ Temp.: 24 Hours @ 72° F

Specific Gravity: 1.15

VOC: 0.13%; 1.38 g/L



SKU	Capacity	Packing Type
442-2087067	50 mL	Tube

Thread Sealants w/ PTFE

Features:

- A general purpose sealant with the added lubricity of PTFE for metal pipes.
- Won't shred like tape and allows easy disassembly.

Test & Approvals: CFIA

Temp. Range: -65° F - 300° F

Color: White

Applications: Pipe

Resistance: Common Shop Fluids

Specific Gravity: 1.12

VOC: 35.98%; 343.43 g/L

Wt.: 1.29 lb



SKU	Capacity	Packing Type
442-1527514	1 pt	Can

Threadlockers



242™ Threadlockers, Medium Strength

Features:

- Medium strength, medium viscosity, methacrylate-based threadlocking adhesive offering general purpose qualities.
- Provides quick fixture times on steel, brass and stainless steel of 5, 15 and 20 min respectively.
- Thixotropic to reduce adhesive migration.

Color: Blue

Thread Size: 1/4 in - 3/4 in

Temp. Range: -65° F - 300° F

Applications: Threadlocking

Curing Method: Anaerobic

Resistance: 111 Trichloroethane; Acetone; Brake Fluid; DEF (AdBlue®); Ethanol; Gasoline Leaded I/Unleaded; Motor Oil (MIL-L-46152); Water/ Glycol 50/50



SKU	Capacity Vol.	Packing Type
442-135354	10 mL	Bottle
442-135355	50 mL	Bottle

243™ Medium-Strength Primerless Threadlockers

Features:

- General purpose threadlocker that provides a medium strength bond.
- Seals and secures metal nuts and bolts to prevent loosening due to shock and vibration.
- Works on all metals, including passive substrates, such as stainless steel, aluminum, and plated surfaces.
- Proven to be tolerant of minor contamination due to industrial oils, such as motor oils, corrosion prevention oils, and cutting fluid.

Test & Approvals: NSF 61; RoHS Certified

Color: Blue

Thread Size: 1/4 in - 3/4 in

Temp. Range: -65° F - 360° F

Fix Cure Time @ Temp.: 5 min @ 72° F

Applications: Locking and Sealing Fasteners up to 3/4 in dia

Curing Method: Anaerobic

Resistance: Corrosion; Rust



SKU	Capacity Vol.	Packing Type
442-1329467	50 mL	Bottle

CLEANING PRODUCTS

Cleaners & Degreasers



Brakleen® Brake Parts Cleaners

Features:

- Maintaining clean brake and disc parts can improve the life of your car's braking system and keep you safe on the roads.
- Using a brake cleaner for cleaning and degreasing is a great way to maximize the performance and increase the longevity of your entire brake system.
- Formulated to quickly and effectively remove grease, brake dust, brake fluids, oils, and other contaminants from brake parts, lining, pads.
- Options available for chlorinated and non-chlorinated formulas, including non-chlorinated that is less than 45% VOC (05084), ultra low VOC that complies with SCAQMD Rule 1171 (05151), and compliant with VOC regulations for all 50 states (05050).

Dielectric Strength: 37,500 V

Color: Colorless

Applicable Material: ABS, All Brake Systems Including Springs and Wedge Brakes; Brake Cylinders; Brake Drums; Brake Linings; Brake Shoes; Calipers; Clutch Discs; Disc; Disc Brake Pads; Drum

Removes: Brake Dust; Brake Fluids; Grease; Oils; Other Contaminants

Chemical Compound: Tetrachloroethylene

Odor/Scent: Irritating

VOC: 0%; 0 g/L; 0 lb/gal

Specific Gravity: 1.62

SKU	Capacity Vol.	Fill Amount
125-05089	20 oz	19 wt oz



Industrial Cleaners and Degreasers

Features:

- All-purpose cleaner, degreaser and deodorizer.
- Concentrate dilutes up to 1:30.
- Easily cuts through thick grease, oils, hydraulic fluids and built-up grime on all washable surfaces.
- Non-abrasive, non-corrosive, non-flammable and VOC compliant formula.
- Safe for use in cleaning equipment including floor scrubbers, carpet cleaners and parts washers.
- Orally non-toxic and readily biodegradable formula*.
- EPA Safer Choice product.
- Safer than caustic cleaners and solvents.

Test & Approvals: OECD 301D Ready Biodegradability

Dielectric Strength: 65-70 mV/m

Color: Green

Applicable Material: Carpet; Ceramics; Cement/Concrete; Enamel; Fabric; Fiberglass; Laminates; Metal; Plastic; Upholstery

Removes: Grease; Oil; Dirt; Soil

Chemical Compound: Ethoxylated Alcohol; Sodium Citrate; Sodium Carbonate; Citric Acid

Odor/Scent: Sassafras

VOC: 0%

Specific Gravity: 1.03

SKU	Capacity Vol.	Fill Amount
676-2710200613005	1 gal	1 gal



LEAK DETECTORS & PENETRANTS

Penetrants



PB™ Penetrating Catalysts

Features:

- Great for loosening rusted or frozen screws and bolts.
- Effective rust inhibitor.
- Non-evaporating lubricant.
- Penetrates into hard-to-reach areas.
- Suitable for brake, exhaust and suspension system jobs.
- Available with ProStraw™ with Control Flow Technology™ (16-PB-DS).



SKU	Capacity Vol.	Physical Form
108-16-PB-DS	11 oz	Aerosol Liquid

LUBRICANTS & PENETRANTS

Anti-Seize Compounds



Food Grade Anti-Seize

Features:

- Prevents seizure, galling, and friction in stainless steel and other metal parts.
- Used in industrial food industries and general plant maintenance.
- Metal free formulation.

Color: White

Chemical Compound: Mineral Oil; Calcium Dihydroxide

Resistance: Acetylene; Acid; Ammonia; Chemical; Corrosive Process; Vinyl Monomer

Applicable Materials: Aluminum; Most Metals; Steel

Applications: Threaded Joints; Metal-to-Metal Surfaces

Physical Form: Paste or Gel

Odor/Scent: Mild Oil

Quantity: 12 per case

Specific Gravity: 1.3

Flash Point: 309.2 °F

VOC: <3%



SKU	Capacity Wt.	Packing Type
442-1167237	8 oz	Brush Top Can

LB 8008™ C5-A® Copper Based Anti-Seize Lubricants

Features:

- Exclusive formula suspends copper and graphite in a high quality grease.
- Protects metal parts from rust, corrosion, galling, and seizing.
- Establishes greater clamp load.
- Known as Loctite® C5-A®.

Color: Copper

Chemical Compound: Petroleum; Mineral Oil; Calcium Dihydroxide; Copper; Graphite; Quartz

Resistance: Corrosive Process

Applicable Materials: Most Metals; Plastic; Copper; Brass; Cast Iron; Steel; Stainless Steel

Applications: Die; Machinery; Valve

Physical Form: Paste

Odor/Scent: Mild

Quantity: 12 per case

Specific Gravity: 1.3

Flash Point: >199.4 °F

VOC: <3%



SKU	Capacity Wt.	Packing Type
442-160796	1 lb	Brush Top Can

Silver Grade Anti-Seize Lubricants

Features:

- Heavy duty, temperature resistant, petroleum-based lubricant compound fortified with graphite and metallic flake.
- Inert and will not evaporate or harden in extreme cold or heat.
- For use in assemblies.

NLGI Grade: 1

Temp. Range: -15 °F - 1600 °F

Color: Silver

Chemical Compound: Graphite; Mineral Oil

Resistance: Corrosive Process

Applicable Materials: Aluminum; Most Metals; Stainless Steel

Applications: Multi-Purpose

Physical Form: Paste

Odor/Scent: Petroleum

Quantity: 10 per case

Specific Gravity: 1.25

Flash Point: >199.4 °F

VOC: <3%



SKU	Capacity Wt.	Packing Type
442-235005	1 lb	Can

Corrosion Inhibitors



Zinc-It® Instant Cold Galvanize Coatings

Features:

- High-performance coating of >93% pure zinc that electrochemically bonds with ferrous metals to form a galvanic cell.
- It actively fights rust and corrosion.
- Use as a touch-up for damaged galvanized coatings.
- Dries quickly.
- Outdoor protection for 1 to 2 years.

Packing Type: Aerosol Can

Temp. Range: - 130° F Continuous; 150° F Intermittent

Color: Gray Viscous

Applicable Materials: Ferrous Metals

Chemical Compound: Acrylic

Odor/Scent: Solvent

Flash Point: -2° F

VOC: 45.6%; 555.6 g/L; 4.64 lb/gal

Specific Gravity: - 0.77 to 0.85

Type: Anti-Corrosion Coating

Recommended Film Thickness: 2 to 3 mil



SKU	Capacity Vol.	Fill Amount
125-18412	16 oz	13 wt oz



LPS® 3® Premier Rust Inhibitors

Features:

- Protects steel against rust and corrosion for up to 2 years (Indoor storage. 9 months outdoor storage).
- Penetrates to displace moisture.
- Resists moisture, sand, dirt, dust and vibration.
- Does not contain chlorinated solvents or silicone.
- Non-staining.
- Safe on most surfaces.



Color: Brown

Applicable Materials: All Metals

Applications: Air Plane Fuselages; Battery Terminals; Cables; Chains and Pulleys; Cargo Sections; Elevators; Interior Sections of Vehicle Doors; Metal Parts; Offshore Drilling Equipment; Outdoor Storage and Shipments; Pumps and Hose Assemblies

Chemical Compound: Petroleum

Odor/Scent: Mild Cherry

Flash Point: 64.4° F

VOC: 64%

Specific Gravity: - 0.87

Type: Anti-Corrosion Coating

Recommended Film Thickness: 3 to 7 mil (Wet); 1 to 3 mil (Dry)

Wt.: 0.69 lb

SKU	Capacity Vol.
428-00316	11 oz

Fluids



EP-Xtra® Cutting Fluids

Features:

- Outstanding performance for any cutting operation on any metal.
- Absolutely without equal on hard metals and on cuts requiring extreme pressure or long cutting times.
- Metal cutting fluid used to increase speed, extend tool life and improve cut quality



Container Size: 16 oz

SKU	Applicable Materials	Packing Type
702-10016E	Aluminum; Brass; Cast Iron; HSS; Inconel; Mild Steel; Nickel; Stainless Steel; Titanium	Squeeze Bottle with Spout

Grease



JT-6® Hi-Temp Grease #2

Features:

- Formulated with a high dropping point for use over a wide temperature range.
- Provides excellent protection in severe service and outstanding shock load protection.

Test & Approvals: Meets Highest Performance Categories of ASTM D4950 Automotive Grease Classification System; GC for Wheel Bearing Service; LB for Chassis Service

Packing Type: Tube

NLGI Grade: 2

Color: Red

Temp. Range: -10° F - 325° F

Flash Point: >302 °F

Specific Gravity: - 0.93

Thickener: Lithium Complex

Odor/Scent: Mild Petroleum

Applicable Materials: Metal

Applications: Agricultural; Automotive Chassis and Bearings; Construction; Industrial; Trucking Chassis and Wheel

Resistance: Shock Load; Cold Weather



SKU	Capacity Wt.	Capacity Vol.
122-665005002080	14 oz	14 oz

Grease Guns



Lever Type Heavy-Duty Grease Guns

Features:

- Flip-over follower is set for cartridge use.
- Extra-heavy follower spring insures positive priming and uninterrupted pumping action.

Outlet Type: 6 in Extension/Coupler

Designated Fluid: Grease

SKU	Capacity Vol.	Operating Pressure
438-1142	16 oz Bulk; 14.5 oz Cartridge	6000 psi



M18™ Cordless 2-Speed Grease Guns

Features:

- Pre-set grease counter dial.
- Flexible hose offers greater access to difficult to reach fittings.
- Air bleeder valve for quick priming.
- Lock-on/Lock-off trigger delivers added user convenience.

Outlet Type: 48 in Hose/Coupler

Designated Fluid: Grease

SKU	Capacity Vol.	Operating Pressure	Includes
495-2646-22CT	16 oz	10000 psi	(2) M18™ REDLITHIUM™ Compact Battery; 48 in Flex Hose w/Spring Guard; Soft Carrying Case; High Pressure Grease Coupler; M18™ & M12™ Multi-Voltage Charger; M18™ Cordless 2-Speed Grease Gun; Shoulder Strap
495-2646-20	16 oz	10,000 psi	Tool Only

Multi-Purpose Lubricants



1® Premium Lubricants

Features:

- Provides a dry, thin, lubricating film.
- Resists oil, dust, and dirt build-up.
- Ideal for delicate mechanisms.
- Removes carbon build-up from surfaces.
- Displaces moisture.
- Safe on paint, fabric, and most plastics.
- Used world-wide in aviation.
- VOC compliant in all 50 states.

Test & Approvals: NSF Registered H2

Packing Type: Aerosol Can

Color: Amber

Applicable Materials: Rubber; Plastic

Applications: Cables; Circuit Breakers; Electric Motors; Electric Connectors; Generators; Hinges; Ignition Systems; Micrometers; Molds; Nuts and Bolts; Precision Open Gears; Power Tools; Relays; Sliding Mechanisms; Switch Gears; Weapon Cleaner

Flash Point: 174.2 °F (79.0 °C)

VOC: 0.4%

Specific Gravity: 0.79 to 0.81 @ 20 °C

Chemical Compound: Petroleum

Type: Greaseless



SKU	Capacity Vol.	Container Size
428-00116	11 oz	11 oz

Oils



Marvel® Air Tool Oils

Features:

- Specially formulated for use in all piston type and rotary air tools, as well as in-line air lubricators.
- Prevents rust formation while providing positive lubrication for smooth starting and longer tool life.
- Assures maximum performance by dissolving gum and sludge that cut down tool speed and reduce power output.

Packing Type: Bottle

SKU	Capacity Vol.	Container Size
465-MM085R1	32 oz	32 oz



Thread Cutting Oils

Features:

- Cools threads and pipe during operation.
- Speeds metal removal.
- Improves thread quality.
- Reduces threading torque.
- Free of chlorine and other halogens, PCBs and heavy metals (complete MSDS available).

Packing Type: Jug

Temp. Range: -

Flash Point: 385° F

Odor/Scent: Mild petroleum/solvent

SKU	Container Size	Color
632-70830	1 gal	Black
632-70835	1 gal	Yellow



Open Stock Lubricants

Features:

- Lubricating ingredients are widely dispersed and hold firmly to all moving parts.
- Dissolves adhesives, allowing easy removal of labels, tape, stickers, and excess bonding material.
- Protects metal surfaces with corrosion-resistant ingredients to shield against moisture and other corrosive elements.
- Loosens rust-to-metal bonds and frees stuck, frozen or rusted metal parts.
- Product displaces moisture quickly and dries out electrical systems to eliminate moisture-induced short circuits.

Temp. Range: -50 °F - 300 °F

Color: Amber

Odor/Scent: Mineral Oil



SKU	Capacity Vol.	Container Size	Packing Type	Flash Point
780-490088	16 oz	16 oz	Aerosol Can	122° F
780-490118	1 gal	1 gal	Canister	122° F
780-490040	11 oz	11 oz	Aerosol Can	131° F
780-490057	12 oz	12 oz	Aerosol Can	131° F
780-490026	8 oz	8 oz	Aerosol Can	122° F

BATTERIES

DURACELL®



Procell® Batteries

Features:

- AA, AAA, C and D batteries are guaranteed for 7 years in storage, 9V batteries are guaranteed for 5 years in storage.
- Recommended for scheduled battery replacement programs.
- Economically packaged in bulk and individually date-coded for effective inventory management.

SKU	Batt. Size	Voltage	Quantity
243-PC1300	D	1.5 V	—
243-PC1400	C	1.5 V	12 per pack
243-PC1500BKD	AA	1.5 V	24 per pack
243-PC1604BKD	9.0 V	9V	12 per pack
243-PC2400BKD	AAA	1.5 V	24 per pack

COOLERS & CHESTS



400 Series Coolers

Features:

- Ultratherm® insulation for maximum cold retention and maintains ice for up to 3 days in temperatures as high as 90°F.
- HDPE hide won't chip, peel, buckle, or rust.
- UV stabilizers prevent fading, cracking in all exposures.
- Front push-button spigot is drip-resistant.
- White FDA Grade liner is easy-to-clean and resists stains and odors.
- Wide mouth pressure fit lid for easy filling.
- Keeper cord prevents lid loss.

Test & Approvals: OSHA

SKU	Color	Width	Length	Height
385-4101	Red/Yellow	15-7/8 in	13 3/4 in	23-1/4 in
385-431	Red/Yellow	13-1/2 in	13 3/4 in	14 in
385-451	Red/Yellow	13 in	14-1/2 in	20.38 in

CLAMPS & VISES

Clamps & Spreaders



Locking C-Clamps with Swivel Pads

Features:

- Wide-opening jaws provide greater versatility.
- Swivel pads hold tapered work, awkward fabricating jobs, and delicate projects.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Guarded release trigger quickly unlocks and protects from accidental release.

Throat Depth: 2-5/8 in

SKU	Overall Length
586-11SP	11 in



The Original™ Locking C-Clamps with Regular Tips

Features:

- Wide-opening jaws provide greater versatility in clamping a variety of shapes.
- Turn screw to adjust pressure and fit.
- Constructed of high-grade heat-treated alloy steel.
- Classic trigger release designed to provide maximum locking force.

Test & Approvals: ASME B107.36-2002

Type: Locking C-Clamp

Pressure: Adjustable Turn Screw

Body Material: Heat-Treated Alloy Steel

Handle Type: Vise-Grip Release

Handle Material: Heat-Treated Alloy Steel

SKU	Opening Size	Overall Length	Throat Depth
586-11R	4 in	11 in	2-5/8 in
586-6R	2-1/8 in	6 in	1-1/2 in

Vises



TRISTAND® Portable Chain Vises

Features:

- Optimized base for more working area.
- Benders are located at the rear of the base and three tool hangers are provided.
- Integrated ground lug provides a conductive surface to connect the weld ground.
- Leg chain retains legs even when subjected to rugged use during operation and transport.
- Rugged tool tray offers prolonged stability before requiring a leg adjustment.

SKU	Pipe Cap.	Material
632-36273	1/8 in - 6 in	Ductile Iron Work Surface; Hardened Steel Jaws and Tubular Legs

HAMMERS, SLEDGES, MALLETS & AXES

Hammers



Chipping Hammers

Features:

- Hammer heads are hardened to precisely controlled temperatures for durability and strength.
- Wide-blade design removes slag faster and adds to the life of the tool.
- Drop forged, heat-treated, hardened head withstands more grinds.
- Well balanced handle grip for comfort and ease-of-use.

Handle Material: Steel

Head Material: Forged Steel

Head Length: 6 in

Color: Black

SKU	Overall Length	Handle Type
900-CH-200	11 in	Spring



Toughstrike American Hickory Engineer Hammers

Features:

- American hickory handle reduces shock.
- Double-face forged steel hammer head for maximum durability.
- Wedge/ring connection for trusted head retention.
- Used for heavy hammering, light demolition work, and driving spikes/wedges.

Handle Type: Wood

Grip Style: Bare Wood

Handle Material: American Hickory

Color: Black; Natural

SKU	Head Weight	Handle Length
027-20184600	4 lb	15 in
027-20184300	3 lb	15 in

TRUE TEMPER



Toughstrike American Hickory Sledge Hammers

Features:

- American hickory handle reduces shock.
- Double-face forged steel hammer head for maximum durability.
- Overstrike protection to prevent handle breakage.
- Wedge/ring connection for trusted head retention.
- Used for heavy demolition work and driving spikes/wedges.

Handle Type: Wood

Grip Style: Bare Wood

Handle Material: American Hickory

Color: Black; Natural

SKU	Head Weight	Handle Length
027-20185000	8 lb	36 in



Toughstrike Fiberglass Engineer Hammers

Features:

- Fiberglass handle for increased handle strength.
- Double-face forged steel hammer head for maximum durability.
- Overstrike protection to prevent handle breakage.
- Epoxy connection for trusted head retention.
- Used for heavy hammering, light demolition work, and driving spikes/wedges.

Handle Type: Fiberglass

Grip Style: Comfort Grip

Handle Material: Fiberglass

Color: Black; Yellow; Gray

SKU	Head Weight	Handle Length
027-20184500	4 lb	15 in

LAWN & GARDEN TOOLS

Shovels & Spades

TRUE TEMPER

Eagle™ Shovels

Features:

- Steel collar for added strength at the handle/socket connection.
- Lightweight fiberglass handle resists splintering, cracking, and weathering.

Blade Type: Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: White Ash

Blade Material: Steel



SKU	Blade Length	Blade Width
027-1554300	11 in	8-1/4 in
027-1554500	10-1/2 in	9 in

UnionTools

Round Point Shovels

Features:

- Dura-Torque® crimp collar for super-strong head-to-handle connection.
- This shovel is of good quality and designed for light-to medium-duty jobs or for occasional users.
- Heavy duty blade.
- Ash Handle.

Blade Type: Forward Turned-Step; Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Socket Length: 9 in



SKU	Blade Length	Blade Width
760-40191	11.5 in	9.25 in



Square Point Transfer Shovels

Features:

- Perfect for moving loose garden material, sand, top soil, or debris.
- Can also be used to shape beds, mix concrete, level off areas that need to be flat, or to scrape stubborn material off driveways or other hard surfaces.
- Options available for poly D-Grip short handled and long handled shovels.

Blade Type: Forward Turned-Step; Open-Back

Blade No.: #2

Handle Type: Straight

Handle Material: North American Hardwood

Blade Material: Steel

Socket Length: 9 in



SKU	Blade Length	Blade Width
760-40184	11.5 in	9.25 in

Sprayers



3.5 gal Industrial Concrete Open Head Sprayers

Features:

- Tri-Poxy lined steel tank provides triple protection against rust, corrosion and damage from denting.
- Featuring a large 4 in-wide mouth opening for easy filling and cleaning.
- Chemical-resistant seals and gaskets designed to handle a variety of chemicals.
- Brass pump, wand, nozzle and shut-off with lock-on feature.
- Reinforced hose with thread fittings.

Operating Pressure: 40 to 60 psi

Extension Type: Brass Wand

Hose Length: 48 in

Color: Red

Pump Type: Piston with Chemical-Resistant Seals and Gaskets

Handle Type: Tri-Lock Cap; Ergo

Nozzle Type: Brass Fan-Tip

Body Material: Tri-Poxy® Steel

Mounting: Hand Held

Applicable Materials: Concrete Additives; Form Oil

Includes: Tank; Brass Wand; Reinforced Hose

Wt.: 11 lb



SKU	Capacity Vol.	Extension Length
139-1949	3-1/2 gal	24 in

Water Hose Parts & Accessories



Metal Nozzles

Features:

- Hold-open clip for continuous spraying.
- Self-adjusting "duck" packing for lifetime leak proof seal.
- Metal construction built for frequent use.
- Threaded front for adding attachments.

Handle Type: Pistol Grip

Body Material: Metal

Nozzle Type: Classic

SKU	Type	Style
305-857302-1011	Rear Control	Full Size

Water Hoses



Pro-Flow™ Commercial Duty Hoses

Features:

- Octagonal heavy-duty crushproof couplings.
- Continuous flow tube keeps water flowing even if kinked.
- Metal spring collar prevents kinking at faucet.
- Anti-bacterial lining prevents deterioration and extends hose life.

Operating Pressure: 450 psi

Reinforcement: PVC

Wt.: 11.91 lb

SKU	Inside Diam	Length
027-4003600	5/8 in	50 ft

PIPE THREADING EQUIPMENT

Threaders Powered



Model 300 Power Drive Threading Machines

Features:

- Cam-action rear centering device turns with chuck.
- Two heavy-duty support bars.
- Speed grip chuck with replaceable jaw inserts.
- Forward/Off/Reverse switch and integral On/Off foot switch.
- Lightweight, portable design.
- Self-contained oil system with adjustable flow control.
- Ideal for use with RIDGID® roll groovers.
- Convert to portable threading machine with Model 141, 2-1/2 inch to 4 inch (36620), and Model 161, 4 inch to 6 inch (36630), both Sold Separately.
- Choose from 300 Power Drive Complete (15682 and 15722) or 300 Power Drive Only (41855 and 75075).



Speed: 36 RPM

Amps: 15 A

Power Cap.: 1/2 hp

Phase: Single

Includes: (1) 300PD, Tool Only, 115V 25-60Hz 38 RPM NPT (41855); ; (1) 300PD Clip-On Tool Tray (22638); (1) 811A 1/8 in to 2 in NPT Die Head, Self-Opening, RH (97065); (1) 1/2 in to 3/4 in Universal Alloy Die Set (47745); (1) 1 in to 2 in Universal Alloy Die Set (47750); (1) 360 Cutter Assy (42370); (1) 311 Carriage with Lever (68815); (1) #32 Transport Cart (42575); (1) 341 Reamer Assy (42365); (1) 1206 Stand (42360); (1) Oiler with One Gallon Premium Thread Cutting Oil (10883)

SKU	Pipe Cap.	Voltage
632-15682	1/8 in - 2 in	115 V AC

Threaders Powered Accessories




Pipe Dies for Machine Die Heads

Features:

- Strong and durable pipe dies for use in universal die heads.
- Applicable to a wide variety of die heads.
- A convenient replacement to keep systems functioning for longer.

Height Adjustment: -

Pipe Cap.: 1 in - 2 in



SKU	For Model	Type
632-47770	Universal Die Heads Nos 504A/711/713/811A/815A/816/817/842	High-Speed RH



Power Threading Die Heads for 2 in Threading Machines

Features:

- All die heads are through-head oiling.
- No 500A Die Head replaces the No 500 Mono Die Heads.
- Individual machine die heads do not include dies.

Pipe Cap.: 1/8 in - 2 in

Used With: Compact Threading Machine; Power Threading Machine

SKU	For Model	Type
632-97065	1215, 1233, 535, 535A, 300 Compact Machines and 300 Power Drive	811A Multi-Size Die Head; Quick Opening

PLIERS & CUTTERS

Locking Pliers



VISE-GRIP® Straight Jaw Locking Pliers

Features:

- Straight jaws provide maximum contact on flat, square, or hex work.
- Ideal for tightening, clamping, twisting and turning.

Test & Approvals: Meets federal Specifications: GGG-W-00649

Throat Depth: 1-3/4 in

Material: Alloy Steel

SKU	Jaw Opening	Overall Length
586-10R-3	1-5/8 in	10 in



WISE-GRIP® The Original™ Curved Jaw Locking Pliers with Wire Cutters

Features:

- Curved jaw puts tremendous pressure on four points of any style nut or bolt head.
- Includes convenient wire cutter.
- Constructed of high-grade heat-treated alloy steel for maximum toughness and durability.
- Guarded release trigger quickly unlocks and protects from accidental release.
- Turn screw to adjust pressure and fit, stays adjusted for repetitive use.
- Hardened teeth are designed to grip from any angle.
- Hex key adjusting screw offers controlled release and draws materials tightly together.

Test & Approvals: Meets federal Specifications: GGG-W-00649

Throat Depth: 2-5/8 in

Material: Alloy Steel



SKU	Jaw Opening	Overall Length
586-10WR-3	1-7/8 in	10 in

Tongue & Groove Pliers



420® Straight Jaw Tongue & Groove Pliers

Features:

- Pick a perfect pair of pliers with patented PermaLock® fastener which eliminates nut and bolt failures.
- Also, patented reinforcing edge minimizes stress breakage.
- Right angle laser heat-treated teeth provide a sturdy, long-lasting grip.

Jaw Length: 1-1/8 in

Jaw Shape: Straight

No. of Adjustments: 5

SKU	Overall Length	Jaw Opening
140-420-BULK	9-1/2 in	1-1/2 in

440® Straight Jaw Tongue & Groove Pliers

Features:

- Pick a perfect pair of pliers with patented PermaLock® fastener which eliminates nut and bolt failures.
- Also, patented reinforcing edge minimizes stress breakage.
- Right angle laser heat-treated teeth provide a sturdy, long-lasting grip.

Jaw Length: 1-1/2 in

Jaw Shape: Straight

No. of Adjustments: 7



SKU	Overall Length	Jaw Opening
140-440-BULK	12 in	2-1/4 in

Bigazz® Straight Jaw Tongue & Groove Pliers

Features:

- Powerful pliers are super-sized to fit even the biggest jobs.
- Slip-free undercut tongue-and-groove design.
- Reinforced jaw edge.

Jaw Length: 3 in

Jaw Shape: Straight

No. of Adjustments: 12



SKU	Overall Length	Jaw Opening
140-480-BULK	20-1/4 in	5-1/2 in

Straight Jaw Tongue and Groove Pliers

Features:

- Powerful pliers with patented PermaLock® fastener eliminates nut and bolt failures.
- Slip-free undercut tongue-and-groove design.
- Reinforced jaw edge.

Jaw Shape: Straight



SKU	Overall Length	Jaw Opening	Jaw Length	No. of Adjustments
140-430-BULK	10 in	2 in	1-3/8 in	7
140-460-BULK	16-1/2 in	3-3/4 in	2-1/2 in	8

PRYING TOOLS

Bars



Pinch Point Crowbars

Features:

- Hardened, drop-forged steel construction.
- Heavy-duty tool for stubborn prying tasks and heavy lifting.
- Useful for breaking up hard surfaces.

Stock Size: 1-1/4 in

Tip Width: 1-1/4 in

Material: Heat Treated Carbon Steel

SKU	Wt.	Overall Length
027-1160100	18 lb	60 in

STAPLERS & RIVETERS

Riveters



HP-2® Rivet Tools



Features:

- Square shoulder fulcrum pin of cold-formed heat treated steel prevents pin rotation that can elongate the engaging holes and cause premature tool failure in imitation tools.
- Handles have cushion-molded vinyl grips for comfort.

Handle Material: Carbon Steel

Includes: (4) Mounted Nosepieces; Service Wrench

SKU	Rivet Size	Body Material
466-M39000	3/32 in; 1/8 in; 5/32 in; 3/16 in	Aluminum Alloy

Staplers



T50 Heavy-Duty Staple Guns

Features:

- Features an all chromed steel housing, jam resistant mechanism, powerful coil spring, staple viewing window, and steel working parts hardened in a 1,500 degree furnace.
- Ideal for general repairs, professional uses, upholstery, insulation, and light trim.

Body Material: All Steel

Finish: Chrome

Applications: Gen Repairs; Upholstery; Insulation; Light Trim



SKU	Staple Height
091-T50	1/4 in; 5/16 in; 3/8 in; 1/2 in; 17/32; 9/16 in

TOOL STORAGE

Tool Chests



Site-Vault™ Heavy-Duty Chests

Features:

- Site-Vault™ security system is a patented system with 3 locking points and a reflective orange lock indicator that shows when the box is locked or unlocked.
- Heavy-duty beveled edge lid eliminates sharp front lid corners and enhances lid strength.
- Integrated sidewall storage locker can be padlocked for personal items.
- Heavy-duty EZ-Loader 4-way skid bolsters allow fork lift loading from any side for quicker and easier transport.
- Upgraded lock system now allows usage of padlock models Master #1, #5, #175 and American #50.

Color: Brown

Material: Steel

Wt.: 98 lb

SKU	Capacity Vol.	Width	Depth	Height
217-2-652990	8.3 ft³	36 in	20 in	23-3/4 in

WRENCHES

Combination Wrench Sets



14 Piece SAE Combination Wrench Sets



Features:

- Heat treated for maximum strength.
- Sizes stamped on both sides for easy identification.
- Nickel chrome plated for long lasting protection.

No. of Points: 12

Opening Type: Open/Box

Material: Chrome Vanadium Alloy Steel

Finish: Full Polish Chrome Plated

Includes: Roll-Up Pouch; 3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in; 15/16 in; 1 in; 1-1/16 in; 1-1/8 in; 1-1/4 in

Measuring System: SAE

SKU	Opening Size
192-CCWS4-05	3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in; 15/16 in; 1 in; 1-1/16 in; 1-1/8 in; 1-1/4 in

Pipe Wrenches



Aluminum Straight Pipe Wrenches

Features:

- Nearly 40% lighter than comparable cast-iron models.
- Jaws and all other parts identical to Ridgid heavy duty wrenches.

Material: Aluminum

Jaw Material: Alloy Steel

Handle Type: I-Beam

SKU	Pipe Cap.	Overall Length	Wt.
632-31090	1-1/2 in	10 in	1 lb
632-31095	2 in	14 in	2-1/2 lb
632-31100	2-1/2 in	18 in	3-3/4 lb
632-31105	3 in	24 in	6 lb
632-31110	5 in	36 in	11 lb
632-31115	6 in	48 in	18-1/2 lb



Heavy-Duty Straight Pipe Wrenches

Features:

- Instant grip/release.
- Heat-treated replaceable jaw.
- Easy spin nonstick adjustment nut.
- Fully floating forged hook jaw.
- Replaceable hook and heel jaws.

Test & Approvals: Complies with Federal Specifications GGG-W651E, Type II, Class A

Material: Cast Iron Handle

Jaw Material: Steel

Handle Type: I-Beam

SKU	Pipe Cap.	Overall Length
632-31015	2 in	12 in
632-31020	2 in	14 in
632-31025	2-1/2 in	18 in
632-31030	3 in	24 in

CLEANING PRODUCTS

Floor & Carpet Cleaners



Oil-Based Non-Sanded Floor Sweeping Compounds

Features:

- Non-abrasive sweeping compound safe to use on any floor.
- Perfect for collecting dirt and dust on all types of wood, tile, terrazzo, and finished concrete floors without scratching.

Color: Red

SKU	Capacity	Packing Type
103-FLOOR-SWEEP	50 lb	Box



Wax-Based Floor Sweeping Compound

Features:

- Non-sanded, wax-based formula.
- Conditions as it cleans.
- Suitable for most surfaces, finished or unfinished.
- Keeps floors looking their best.

Color: Green

SKU	Capacity	Packing Type
103-FLOOR-SWEEP-WAX50	50 lb	Box

PERSONAL HYGIENE

Hand Cleaners



Natural Orange™ Pumice Hand Cleaners

Features:

- Pumice scrubbing particles get hands clean fast.
- Lotion formula provides powerful yet gentle cleaning performance.

Odor/Scent: Citrus

Capacity Vol.: 1 gal

Quantity: 4 EA/CA

SKU	Packing Type	W x L Per Sheet
315-0955-04	Bottle w/Pump	x



Hand Cleaner Towels

Features:

- Clean, citrus-scented formula loosens and dissolves industrial soils while leaving hands free from dryness and irritation.
- Rough Touch® blue towel locks in soil to prevent it from transferring back onto hands and surfaces.
- Hands are left feeling clean with no sticky residue and no rinsing required.

Odor/Scent: Citrus

Quantity: 72/Container; 6 PA/CA

SKU	Packing Type	W x L Per Sheet
253-42272	Wipe Container	10 in x 12 in

VACUUMS



M18™ Cordless Wet/Dry Vacuums

Features:

- 20% higher suction than competition.
- Built in blower port.
- HEPA rated high efficient filter for dust collection.
- On board hose and accessory storage.
- Quieter cordless wet/dry vacuum.
- Resuable and washable filter.
- Tool box design for excellent portability.
- HEPA rated high efficient filter for dust collection.
- Reusable and washable filter.

Test & Approvals: Complies with OSHA and UL Requirements

Tank Material: Plastic

Includes: 6 ft Flexible Hose; Crevice Tool; HEPA Filter; Utility Nozzle



SKU	Capacity Vol.	Air Consumption
495-0880-20	2 gal	45 ft³/min

WASTE RECEPTACLES

Trash Can Liners



FLEX-O-BAG®
Trash Can Liners
and Contractor Bags

Features:

- Convenient large rolls of heavy industrial weight plastic bags in handy dispenser boxes and extra-long twist ties.
- Also included are Hold-Tite rubber bands to secure bag to can top; excluding Heavyweight Contractor Bags (HB42-20).
- No side seams to split and no gussets to weaken the bottom.
- Options available for Extra Heavy-Duty Contractor Bags, Heavyweight Contractor Bags, High Count Industrial Grade Trash Can Liners, and Tall Kitchen Bags.

Height: 56 in

Thickness: 3 mil

Color: Black

Grade: Extra Heavy-Duty Contractor Bags

Quantity: 30 EA/BX



SKU	Capacity Vol.	Width
795-HB55-30	- 55 gal	36 in

Trash Cans



BRUTE® Round Containers without Lid

Features:

- Durable, heavy-duty containers for a variety of uses.
- Proprietary design plus a UV inhibitor ensures long life.
- Venting channels reduce the force required to remove a full can liner.
- Integrated cinches secure liners for efficient knot-free changes.
- Seamless construction makes cleaning the container easier.
- Contoured base handles improve grip, reduce strain, and improve efficiency.
- Reinforced rims add strength and durability while transporting.
- Built-in, rounded handles allow easy, non-slip lifting and anti-jam nesting.
- Reinforced base built to withstand rough surfaces for extended life.
- Gray, white and yellow are USDA Meat and Poultry Equipment Group Listed and assist in complying with HACCP guidelines.
- Certified to NSF Standard #2 (gray, white and yellow) and Standard #21 (all colors).
- Available in 10 gallon, 20 gallon, 32 gallon, 44 gallon, and 55 gallon sizes.

Height: 33 in

Dia.: 26-1/2 in

Material: Heavy-Duty Plastic



SKU	Capacity Vol.	Color
640-FG265500GRAY	55 gal	Gray

WIPING PRODUCTS

Towels & Wipers



Scott® Shop Towels

Features:

- Ideal for changing oil, refilling fluids and general maintenance.
- Strong, absorbent towel is great for wiping hands, tools and cleaning up grease, oil, grime and fluids.
- Works well when wet.

Scent: Unscented

Quantity: 30 per case

Packing Type: Roll



SKU	Color	W x L per sheet
412-75130	Blue	11 in x 10.4 in



Stainless Steel Cleaner Towels

Features:

- Stainless steel cleaner and polish in convenient premoistened towels.
- Clean, polish, brighten and protect in one step without dripping or overspraying.
- Prevent water marks and corrosion while preserving the high luster of stainless steel.
- For use on stainless, steel, chrome and aluminum.

Scent: Citrus

Quantity: 30 Sheets/Container

Packing Type: Canister

SKU	W x L per sheet
253-91930	9-3/4 in x 10-1/2 in

CRAYONS



Paintstik® Original B® Solid Paint Markers

Features:

- Solid paint marker combines the durability of paint in the convenience of a crayon.
- Superior marking performance on oily, icy, wet, dry, or cold surfaces.
- Weather-resistant and UV-resistant for long-lasting marks.
- Works on rough, rusty, or dirty surfaces.
- Available in three different sizes-11/16 in (round/standard), 3/8 in (fine), and 1 in (king/jumbo).

Length: 4-3/4 in

Temp. Range: -50° F - 150° F

Flash Point: 204° C

Applicable Materials: Concrete and Stone; Glass; Lumber and Timber; Pipes and Tubes; Plastic; Rubber and Tires; Steel and Iron

Resistance: UV; Weather

Quantity: 12 EA/DZ

SKU	Color	Dia.
434-80220	White	11/16 in
434-80221	Yellow	11/16 in

MARKERS



BRITE-MARK® Medium Paint Markers

Features:

- Make permanent bright marks on metal, rubber, plastic, glass, concrete, leather, stone, wood, vinyl and more.
- Formula is not xylene-based.
- Valve actuated mechanism prevents paint in barrel from drying when cap is left off.
- Heavy duty aluminum body with large paint capacity.
- Ideal for color coding.
- Bullet tips are replaceable to ensure complete use of paint in each marker.
- Drying Time: 25 – 35 seconds.

Tip Size: Medium; Fiber #15

Tip Type: Bullet

Temp Range: 0° F - 350° F

Quantity: 12 EA/BX

SKU	Color	Physical Form
253-84003	White	Liquid Paint



Paint-Riter® Valve Action® Paint Markers

Features:

- Variety of colors for improved mark identification, quality control, and parts inspection.
- Fast-drying, permanent paint for immediate handling reduces work downtime.
- Xylene-free paint reduces user health risks and makes for a safer marking tool.
- Dura-Nib medium bullet tip resists wear to provide long marking life.
- Durable metal barrel and clip-cap reduce breakage and store easily in pocket.

Test & Approvals: Meets California VOC Regulations

Tip Size: 1/8 in

Tip Type: Medium Bullet

Temp Range: -50° F - 150° F

Quantity: 12 EA/BOX

SKU	Color	Physical Form
434-96820	White	Liquid
434-96821	Yellow	Liquid
434-96822	Red	Liquid
434-96823	Black	Liquid



INKZALL™ Ink Markers

Features:

- Features clog resistant tips and the ability to write through dusty, wet, or oily surfaces.
- Designed for writing on rough surfaces, such as OSB, cinder block, and concrete.
- Built-in hard hat clip for easy storage and access.
- Anti-roll body design plus convenient lanyard hole.
- Fine point, ultra fine point, and chisel tip options available

SKU	Color	Physical Form	Tip Size	Tip Type	Quantity
495-48-22-3100	Black	Solid Containing Liquid Ink	—	Fine	36 EA/PK
495-48-22-3102	Black	—	Medium	Medium Point	—



Fine Tip Permanent Markers

Features:

- Permanent alcohol based ink that is fade and water resistant.
- Pocket clip for portability.

Test & Approvals: AP Certified Nontoxic

Tip Size: Fine

Tip Type: Bullet

Quantity: 36 Bulk

SKU	Color	Physical Form
652-35010	Black	Liquid

SOAPSTONE HOLDERS



Standard Soapstone Holders

Features:

- Pocket clip.
- Positive lock adjustment.
- Spring tension friction guide for soapstone.

Used With: Standard Flat Soapstone

Includes: Pocket Clip; Soapstone

SKU	Shape	Length
900-SH-10	Flat	5 in

WYPO

Flat Soapstone Holders

Features:

- Spring steel pocket clip oversized to fit leather aprons.
- Non-corrosive channel with brass indexing trigger provides superior sliding action.
- Practical design allows for one handed operation and easy use.
- Brass trigger depresses and slides to proper alignment hole and snaps back to lock in position.

Used With: Flat Soapstone

Includes: Holder only



SKU	Shape	Length
326-400-1	Flat	5 in

SOAPSTONES



Soapstones

Features:

- All white texture for excellent marking quality.
- Grain cut to ensure good strength and long service life.
- Marks will not contaminate welds and are easily removed.
- Low water content for increased hardness and resistance to breakage.

Length: 5 in

SKU	Shape	Color
900-FL-5	Flat	White
900-RD-5	Round	White

CARTS & TRUCKS

Hand Trucks



D-Handle Hand Trucks

Features:

- Holds a maximum capacity of 800 pounds.
- Stands on its own.

Wheel Width: 4 in

Wheel Type: Pneumatic with Steel Hub; 5/8 in Ball Bearing

Height: 50 in

Width: 19 in

Handle Type: D-Handle

Material: Rubber Wheels; Steel; Steel Hub

Wt.: 25 lb



SKU	Load Cap.	Wheel Diam
310-30019	800 lb	10 in

Utility Carts



Utility Carts

Features:

- Sturdy structural foam construction won't rust, dent, chip, or peel.
- Rounded corners protect walls and furniture.
- Lightweight and maneuverable.

Width: 25-7/8 in

Depth: 45-1/4 in

Color: Black

SKU	Load Cap	Height
640-FG452088BLA	500 lb	33-1/4 in

FLANGE PINS & ALIGNERS



Two Hole Pins

Features:

- Sturdy two hole pins are machined from hardened steel for added durability and longevity.
- Utilize fast double lead threads instead of ACME threads for a more reliable hold over time.
- Lightweight.

Hole Diam: 1/2 in - 1-7/16 in

SKU	Material	Pin Type
496-42050-T	Alloy Steel	Threaded

LEVELS



True Blue® Heavy-Duty Magnetic Torpedo Levels

Features:

- High contrast e-BAND™ vials highlight the edge of the bubble.
- V-Groove working edge for accurate alignment on pipe or conduit.
- Aluminum frame with top read window.

Accuracy: 0.0005 in per in

No. of Vials: 3

Vial Positions: 45°; Level; Plumb

Base Type: Magnetic; V-Groove

Body Material: Aluminum

SKU	Length
272-em81.9	9 in

SQUARES



True Blue® Combination Squares

Features:

- True Blue® vial for accuracy.
- Machined square head.
- Self-aligning drawbolt, hardened scribe.
- Etched blade with permanently marked graduations.

Graduation(s): 16ths, 32nds

No. of Scales: 1

Increment @ Scale: 1/16 in @ 1 in

Material: Steel

Finish: Matte

Measuring System: Inch

Wt.: 1/2 lb

SKU	Blade Length	Blade Width
272-e250	12 in	1 in

COVERING PRODUCTS

Tarps



Multiple Use Tarps

Features:

- Sun and fade resistant.
- Rot and rust proof.
- Reinforced hem.
- Heat-sealed seams.
- Grommets every 3 ft.

Material: Polyethylene

Thickness: 5 mil

Resistance: Fade; Rot and Rust Proof; Sun

Color: Blue

SKU	Length	Width
101-2020-TARP	20 ft	20 ft
101-2030	30 ft	20 ft

COMPRESSORS, BLOW GUNS,
HOSES & FITTINGS

Blow Guns



Long John® Safety Air Guns

Features:

- Safety air guns are ideal for cleaning inaccessible and hard-to-reach areas.
- Use to blow off floor debris, clean masonry forms, tanks, ovens, molds and rafters, as well as machinery and storage areas.

Test & Approvals: Meets OSHA Standards

Operating Pressure: 150 psi

Material: Aluminum Extension

Noise Level: 107 dB

Air Consumption: 34 cfm

Output: 2 lb

SKU	Extension Length	Inlet Size
335-75LJ012AA	12 in	1/4 in (FNPT)
335-75LJ024AA	24 in	1/4 in (FNPT)

CORDLESS TOOL BATTERIES & CHARGERS

Batteries, Cordless Tool



M18™ REDLITHIUM™ HIGH OUTPUT™
HD 12.0 Battery

Features:

- Best-in-class construction: offers long-lasting performance and the best protection against jobsite conditions.
- Fuel gauge Onboard: displays remaining run-time.
- Versatility: powers more than 150 M18™ cordless solutions.

For Model: Milwaukee® M18™ Cordless Power Tools

SKU	Voltage	Batt. Cap.
495-48-11-1812	18 V DC	12.0 Ah



M18™ REDLITHIUM™ HIGH OUTPUT™ XC Battery Packs

Features:

- REDLINK™ Intelligence provides optimized performance and overload protection using total system communication between tool, battery, and charger.
- Fuel gauge onboard displays remaining runtime for less downtime on the job.
- Offers long-lasting performance and durability.
- Delivers fade-free power in extreme jobsite, weather, and environmental conditions.
- Powers more than 150 Milwaukee M18™ cordless power tools.
- Options available for 6.0 Ah and 8.0 Ah capacities.

Batt. Type: Rechargeable Lithium-Ion

For Model: Milwaukee® M18™ Cordless Power Tools

SKU	Voltage	Batt. Cap.	No. of Batteries
495-48-11-1862	18 V	6.0 Ah	2
495-48-11-1880	18 V	8.0 Ah	1



M18™ REDLITHIUM™ XC 5.0 Ah Extended Capacity Battery 2-Pack

Features:

- REDLINK™ Intelligence provides optimized performance and overload protection using total system communication between tool, battery and charger.
- Best-in-class construction; offers long-lasting performance and durability.
- Onboard fuel gauge displays remaining runtime for less downtime on the job.
- Its all-weather performance capability delivers fade-free power in extreme jobsite conditions.

Batt. Type: Lithium-Ion

For Model: Milwaukee® M18™ Cordless Power Tools

SKU	Voltage	Batt. Cap.
495-48-11-1852	18V	5 A-h

Battery Chargers



M18™ Dual Bay Simultaneous Rapid Chargers

Features:

- Capable of charging up to 2 battery packs at the same time at a Rapid Charge speed.
- Internal fan maximizes charger performance.
- Integrated hang holes for wall mounting.
- The charger slowly flashes green when the battery reaches 80% state of charge.
- (2) M18™ Ports.

For Model: M18™ Batteries

Input Voltage: 120 to 127 AC

Power Source: Corded

SKU	Batt. Type
495-48-59-1802	Lithium-Ion

CUTTING TOOLS

Band Saws



Powerband Matrix II HSS Bi-Metal Portable Bandsaw Blades

Features:

- Cuts harder materials.
- Fits Black & Decker, Greenlee, Milwaukee, Rockwell, Ridgid, Porter-Cable, Skil, and Unitec machine models.
- For general purpose cutting on portable bandsaw machines.
- Ready-to- use.
- Welded length.

Width: 1/2 in

Thickness: 0.020 in

Teeth Per Inch: 18

Cutting Edge Material: HSS

Style: Wavy Tooth

Quantity: 3 per sleeve

SKU	Cutting Cap.	Cutting Length
681-14602	-	44-7/8 in



M18 FUEL™ Compact Band Saw Kits

Features:

- POWERSTATE™ brushless motor delivers the fastest cutting speed of any compact band saw.
- Largest Capacity in it's Class: Versatility to cut up to 3-1/4 in X 3-1/4 in material in a single pass.
- CPT Constant Power Technology™: maintains cut speed in the toughest applications for optimal performance.
- Jobsite Armor Technology™: proprietary composite material and crush zone barriers provide long lasting rugged protection.

Batt. Type: Lithium-Ion

Cutting Cap.: 3-1/4 in x 3-1/4 in

Includes: (1) Extreme Thick Metal 8/10 TPI Band Saw Blade; (2) M18™ REDLITHIUM HIGH OUTPUT™ CP3.0 Battery; (1) M18™ & M12™ Rapid Charger

SKU	Voltage	Batt. Cap.
495-2829-22	18 V	3.0 Ah



M18 FUEL™ Deep Cut Band Saws

Features:

- POWERSTATE™ Brushless Motor for increased cutting speed and power through the toughest applications.
- REDLINK PLUS™ Intelligence provides optimized performance and overload protection using total system communication between tool, battery, and charger.
- CPT™ Constant Power Technology maintains cut speed in the toughest applications for optimal performance.
- Jobsite Armor Technology™ is proprietary composite material and crush zone barriers provide long lasting rugged protection.
- All metal direct drive delivers maximum tool life with all metal direct drive gearing system, while requiring less servicing than a chain drive.
- Tool-Free locking adjustable shoe is a button actuated tool-free design allows user to quickly adjust from an extended shoe to no shoe in seconds.
- LED light illuminates work surface for increased accuracy and productivity.
- Dual-Actuation Trigger provides enhanced control and productivity.
- Versatility to cut up to 5 inch by 5 inch material in one pass and adjustable shoe allows for less tool rotation when cutting material above 5 inches.
- Available as tool only or kits.

Cutting Cap.: 5 in x 5 in

Speed: 380 SFPM

Length: 21 in

Handle Type: Multi-Grip T-Handle

Wt.: 15 lb

SKU	Voltage	Batt. Cap.	Batt. Type	Includes
495-2729-20	18 V DC	5.0 Ah	Compatible with all M18™ Batteries (Sold Separately)	(1) M18 FUEL™ Deep Cut Band Saw (Tool Only)(2729-20)
495-2729-22	18 V DC	5.0 Ah	M18™ REDLITHIUM™ XC5.0 Extended Capacity	(1) M18 FUEL™ Deep Cut Band Saw (Tool Only)(2729-20); (2) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Pack (48-11-1850); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812); (1) Carrying Case; (1) Blade



M18™ Fuel Cordless Band Saws

Features:

- Compact light weight design for cutting overhead and in tight places.
- Cuts most common materials for electrician, plumber and mechanical cutting applications.
- LED work light illuminates the cut line in dark areas.
- Tool-Free locking adjustable shoe: Button actuated tool-free design allows user to quickly adjust from an extended shoe to no shoe in seconds.

Includes: Tool Only

SKU	Length	Cutting Cap.
495-2829-20	17.9 in	3-1/4 in

Chop & Cut-Off Saws



Metal-Cutting Saw Blades

Features:

- Evolution saw blades are designed to deliver maximum performance by using the highest grade carbide, hardened blade bodies, and ultra high-grade brazing techniques.
- All offer premium quality.
- Designed to increase performance.

Arbor Diam: 1 in

No. of Teeth: 66

Speed: 1600 rpm

Cutting Edge Material: Carbide

Applicable Materials: Mild Steel

Applications: Square Tube; Angle Iron; Mild Steel Plate; Pipe; Tube; Ferrous Metals

SKU	Blade Diam	Thickness
510-14BLADEST	14 in	0.079 in

Metal-Cutting Chop Saws

Features:

- Lightweight stamped steel base with integrated bench mounting holes.
- Quick-release vise with robust square-threaded rod for fast and secure clamping.
- Accurate and durable cast steel vice with 0° to 45° miter capacity.
- Compact design with a head lock-down pin and carry handle for easy transportation.
- Chip deflector directs chips away from the operator and reduces cleaning time.
- Ergonomic, ambidextrous trigger with comfortable textured grip.
- Attachable V-shape block included for secure clamping of round and square tube.
- Easy blade change with integrated tool storage.

Power Cap: 60 Hz

Voltage: 120 V

Amps: 15 A

Speed: 1,450 RPM

Cutting Cap: 45°

Phase: Single

Handle Type: Trigger

Includes: TCT Blade; Hex Key; V-Block



SKU	Blade Diam	Arbor Diam
510-S380CPS	14 in	1 in

Circular Saws



Endurance® Carbide Circular Saw Blades

Features:

- Endurance blades offer faster cutting and extra long life for contractors.
- Carbide teeth made of C3 grade micro ground carbide keeps the cutting edge sharper for longer periods of time.
- A hardened alloy steel body is used to ensure straight, accurate cuts.
- Specially engineered heat vents and expansion slots prevent blade distortion and increase blade life.
- All of these features add up to a good quality blade that contractors can depend on, time and time again.

No. of Teeth: 42

Teeth Per Inch: 5.25

Applications: Dry Cut

Type: Dry Cut



SKU	Blade Diam	Arbor Diam
495-48-40-4515	8 in	5/8 in

Reciprocating Saws



THE TORCH™ Bi-Metal SAWZALL® Blades

Features:

- Metal-cutting blades with the Double Duty Upgrade™ feature a tooth form optimized for maximum durability.
- Tough Neck™ ribs strengthen the blade tang and minimize breakage.
- Grid Iron™ honeycomb pattern increases blade rigidity to resist blade buckling.
- Ideal for making tough, straight cuts.

Applicable Material: Scheduled 80 Pipe; Angle Iron

Applications: Metal Cutting

Cutting Edge Material: Bi-Metal Tipped

Material: Bi-Metal

Quantity: 25 EA/PKG



SKU	Teeth Per Inch
495-48-00-8787	14



M12 FUEL™ HACKZALL™ Reciprocating Saws

Features:

- One-handed design provides superior control & versatility over a standard recip saw.
- Compact size allows for cutting in tight spaces, and light weight makes overhead work easier.
- POWERSTATE™ Brushless Motor supplies constant power for faster cuts and reduced heat for extended life.
- REDLINK PLUS™ Intelligence provides optimized performance and overload protection using total system communication between tool, battery and charger.
- REDLITHIUM™ XC 4.0 Battery Pack (not included) provides superior pack construction, more work per charge and more work over the life of the pack than competitive batteries.

Batt. Type: Lithium Ion

Stroke Length: 7/8 in

Length: 14 in

Handle Type: Soft Grip

SKU	Voltage
495-2719-20	18 V



M18 FUEL™ SAWZALL® Cordless Reciprocating Saws

Features:

- POWERSTATE™ Brushless Motor for increased cutting speed and power through the toughest applications.
- REDLINK™ Plus Intelligence provides optimized performance and overload protection using total system communication between tool, battery, and charger.
- Anti-corrosion blade clamp delivers prolonged blade clamp durability with less downtime due to corrosion.
- Metal reinforced battery connection provides improved durability and battery retention over life.
- Lever action QUIK-LOK™ blade clamp provides fast and easy blade changes.
- Built-in LED light illuminates the work surface while cutting.
- Adjustable shoe extends the life of the blade.
- 1-1/4 inch stroke length removes more material with each stroke.
- Hang hook allows for convenient storage on the job.
- Compatible with all M18™ batteries and M18™ chargers.
- Options available for bare tool only and kits with battery packs.

Batt. Type: All Rechargeable M18™ Batteries

Stroke Length: 1-1/4 in

Cycle Rate: 3,000 SPM

Length: 17.1 in

Control Type: Trigger

Handle Type: D-Handle

Includes: (1) M18 FUEL™ SAWZALL® Reciprocating Saw (Tool Only) (2821-20); (2) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Packs (48-11-1850); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812)

SKU	Voltage	Batt. Cap.
495-2821-22	18 V DC	5.0 Ah



**M18 FUEL™ SAWZALL®
Reciprocating Saw-Tool Only**

Features:

- Select a saw for superior performance - it delivers the fastest cutting speed in its class.
- Provides increased power with the durability of a corded saw.
- POWERSTATE™ Brushless Motor supplies constant power for faster cuts and reduced heat for extended life.
- REDLINK PLUS™ provides optimized performance and overload protection using total system communication between tool, battery and charger.

Batt. Type: REDLITHIUM™ XC5.0

Stroke Length: 1-1/4 in

Cycle Rate: 0-3,000 SPM

Length: 17.1 in

Control Type: Variable Speed

Handle Type: D-Handle

Includes: Bare Tool Only

Wt.: 6.8 lb

SKU	Voltage
495-2821-20	18 V



**M18™ Sawzall® Cordless
Reciprocating Saw Kits**

Features:

- Counter balance mechanism reduces vibration for more control and less fatigue.
- Lever action QUIK-LOK™ blade clamp provides fast and easy blade changes.
- All metal gearing and gear case provide maximum durability.
- REDLINK™ Intelligence provide ultimate performance and protection against jobsite conditions.

Batt. Type: M18

Stroke Length: 1-1/4 in

Length: 17.1 in

Includes: M18 FUEL™ SAWZALL® Reciprocating Saw; M18™ Redlithium™ XC5.0 Extended Capacity Battery Pack; M18™ and M12™ Multi-Voltage Charger

SKU	Voltage	Batt. Cap.
495-2821-21	18 V	5.0 Ah

DRILLING & FASTENING TOOLS

Crimpers



**M18™ FORCE LOGIC™
Cordless Press Tools**

Features:

- One-handed use in-line design.
- Delivers press accuracy and reliability.
- M18™ Force Logic™ Press Tool monitors the force output to ensure quality connections.
- Compatible with all M18 batteries and chargers.

Brand Name: Milwaukee® Tool

Height: 4.5 in

Length: 14.17 in

Width: 3.14 in

SKU	Voltage	Batt. Type
495-2922-22	18V	Lithium Ion

Drills



**Unibit® High Speed Steel
Fractional Self-Starting**

Features:

- Single-flute cutting edge for greater control through steps.
- Hex shank prevents slipping in drill chuck.
- Also available with (TiN) coating for longer life.
- New SpeedPoint tip penetrates faster than previous Unibits and prevents walking.
- Ideal for drilling holes into thin materials such as stainless steel, copper, brass, aluminum, plastic and laminates.

No. of Steps: 10

Measurement Type: Fractional

Cutting Edge Material: HSS

SKU	Cutting Diam.	Material Thickness
585-10235	1/4 in - 1-3/8 in	1/8 in



29-pc Cobalt M-35 Metal Index Drill Bit Sets

Features:

- Constructed of M-35 5 percent cobalt high speed steel for super abrasive resistance in tough metals.
- Cobalt steel extends cutting edge life and maintains cutting life after resharpening.
- Extra hard drill for greater wear.
- 135° split point tip starts on contact, cuts with less force.
- Removable cartridges: easy to carry bits from case to worksite.
- Rubber overmolded case protects kit if dropped.
- Tap & Drill selection chart for convenient reference.
- Automatic indexing for easy bit access and identification.

Finish: Black Oxide

Includes: 29-piece set in metal index case includes drill bit sizes 1/16 in to 1/2 in in 1/64 in increments

Point Angle: 135°



SKU	Cutting Diam	Cutting Edge Material
585-3018002	1/16 in - 1/2 in	HSS



M18 FUEL™ 2-Tool Combo Kits

Features:

- Includes Milwaukee® cordless hammer drill/driver and cordless impact driver.
- Each tool features dynamic Powerstate™ brushless motor.
- 4-mode Drive Control™ provides greater control over output speed and power.
- Includes durable carrying case.

Speed: 2100/3900 RPM

Batt. Cap.: 5 Ah

Batt Type: Lithium-Ion

Handle Type: Side Handle

Includes: (1) M18 FUEL™ 1/2 in Hammer Drill/Driver; (1) M18 FUEL™ 1/4 in Hex Impact Driver; (2) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Pack; (1) M18™ & M12™ Multi-Voltage Charger; (1) Side Handle; (2) Belt Clip; (1) Blow Molding Carrying Case

SKU	Voltage	Chuck Size
495-3697-22	18 V	1/2 in; 1/4 in

Impact Drivers



M18 FUEL™ 1/4 in Hex Impact Drivers

Features:

- POWERSTATE™ Brushless Motor delivers faster driving speed, increasing users productivity.
- 4-Mode DRIVE CONTROL™ provides greater control over output speed and power.
- M18™ REDLITHIUM™ Battery Pack delivers more work per charge.
- Single handed bit insertion for faster, easier changing of bits.
- Self-Tapping Screw mode provides faster installation time by reducing the stripping of fasteners.
- Premium rubber overmold withstands corrosive materials and provides increased comfort when in use.
- LED light to illuminate the work area.
- Compatible with all M18™ batteries.
- Available as tool only or kit.

Control Type: Trigger

Voltage: 18V

Batt. Type: Lithium-Ion

SKU	Speed	Torque	Length	Includes
495-2953-22	3900 RPM	2000 in-lb	4.49 in	(1) M18 FUEL™ 1/4 in Hex Impact Driver Kit(2953-22); (2) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Pack(48-11-1850); (1) M18™ and M12™ Multi-Voltage Charger(48-59-1812); (1) Blow Molding Carrying Case; (1) Belt Clip
495-2953-20	3900 rpm	2000 in-lb	3.9 in	1/4 in Hex Impact Driver; Belt Clip

Wrenches



M18 FUEL™ High Torque 1/2 in Impact Wrenches with Friction Ring

Features:

- REDLINK PLUS™ intelligence prevents damage to the tool and battery due to overloading or overheating.
- Bolt removal mode provides maximum nut-busting torque to break fastener free, then slows to 750 RPM for more control when removing fasteners.
- Premium rubber over-mold withstands corrosive materials and provides increased comfort when in use.
- Features a friction ring design to ensure quick and easy socket changes.
- REDLITHIUM™ batteries deliver more work per charge and more work over the life of the battery.
- LED light to illuminate the work area.
- Available as tool only or kit.

Voltage: 18 V DC

Batt. Type: Lithium-Ion

Speed: 1750 RPM

Cycle Rate: 2100 IPM

Torque: 1400 ft-lb

Control Type: Trigger

Handle Type: Pistol Grip

SKU	Drive Size	Drive Type	Includes
Friction Ring			
495-2767-20	1/2 in	Square	(1) M18 FUEL™ 1/2 in High Torque Impact Wrench with Friction Ring (Tool Only) (2767-20)
495-2767-22R	1/2 in	Square	(1) M18 FUEL™ 1/2 in High Torque Impact Wrench with Friction Ring (Tool Only) (2767-20); (2) M18™ REDLITHIUM™ XC5.0 Resistant Capacity Battery Pack (48-11-1850R); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812); (1) Blow Mold Case



M18 FUEL™ w/ONE-KEY™ High Torque Impact Wrenches 3/4 in Friction Ring

Features:

- ONE-KEY™ compatible to customize, track and manage tool's performance and location.
- POWERSTATE™ brushless motor delivers up to 1200 ft-lb of fastening torque and 1500 ft-lb of nut-busting torque.
- Features a friction ring with thru-hole design to ensure quick and easy socket changes.
- Easily toggle up to four custom performance profiles that can be saved to the memory of the tool.
- Premium rubber over-mold withstands corrosive materials and provides increased comfort when in use.
- LED light to illuminate the work area.
- Available as tool only or kit.

Voltage: 18 V DC

Batt. Type: Lithium Ion

Speed: 1800 RPM

Torque: 1600 ft-lb

Control Type: Trigger

Handle Type: Pistol Grip

Includes: (1) M18 FUEL™ w/ONE-KEY™ High Torque Impact Wrench 3/4 in Friction Ring Bare Tool (2864-20); (2) M18™ REDLITHIUM™ XC5.0 Resistant Capacity Battery Pack (48-11-1850R); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812)

SKU	Drive Size	Drive Type
495-2864-22R	3/4 in	Square

FINISHING TOOLS

Grinders



4.7 hp Large Angle Grinders

Features:

- Motor provides overload protection.
- Dust Ejection System™.
- Anti-Vibe trigger handle.
- Lightweight design.
- Automatic turn-off brushes.

Watts: 3,450 W

Speed: 6,500 RPM

Control Type: Trigger; No Lock-On

Spindle Thread: 5/8 in to 11

Includes: 9 in Guard; 3-Position Side Handle

SKU	Wheel Dia	Amps
115-DWE4559N	9 in	15 A



High Performance Angle Grinders with E-Clutch®

Features:

- E-Clutch® Activates in less than a tenth of a second when a pinch/stall event is detected.
- Dust Ejection System™ provides durability by ejecting damaging dust and debris particles that enter the tool through the air intake vents.
- Power Loss Reset® prevents accidental restarts following a power disruption when the tool is left in the "on" position.
- Power tool shuts off before overheating with Power-Off® Advanced Overload Protection.

Watts: 1,700 MWO

Speed: 9,000 RPM

Control Type: Paddle; No Lock-On

Spindle Thread: 5/8 in to 11 in

Includes: Grinder; Side Handle; Inner and Outer Flange; 6 in Type 27 Guard; 6 in Type 1 Guard

SKU	Wheel Dia	Amps
115-DWE43144N	6 in	13 A

Small Angle Grinders



Features:

- 11 Amp AC/DC 11,000 RPM motor designed for faster material removal and higher overload protection.
- Low profile gear case allows tool to fit into tight spaces.
- Quick-Change™ Wheel Release provides easier and quicker wheel removal without the need for a wrench.

Watts: 1,400 W

Speed: 11,000 RPM

Spindle Thread: 5/8 in - 11

SKU	Wheel Dia	Amps	Control Type	Includes
115-DWE402	4-1/2 in	11 A	Paddle Switch with Lock-Off	2-Position Side Handle; 4-1/2 in One-Touch™ Type 27 Guard
115-DWE402N	4-1/2 in	11 A	Paddle Switch with No Lock-On	One-Touch™ Guard; 2-Position Side Handle; Wrench



M18 FUEL™ 4-1/2 in and 5 in Cordless Angle Grinders

Features:

- POWERSTATE™ brushless motor, purposely built for the M18 FUEL™ 4-1/2 in and 5 in angle grinder, delivers 8,500 RPM to provide the power to complete the toughest grinding and cutting applications.
- REDLINK PLUS™ Intelligence enables communication between batteries and tools, allowing for unmatched levels of performance, protection, and compatibility.
- Tool-free accessory changes with Integrated FIXTEC Nut Technology.
- Electronic clutch for kickback protection.
- Anti-vibration side handle for increased user comfort and safety.
- Overload protection to maximize motor life.
- Compatible with all M18™ batteries.
- Options available for bare tool only or kit with 2 M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 battery packs.

Voltage: 18 V DC

Spindle Thread: 5/8 in - 11

Speed: 8,500 RPM

SKU	Batt. Type	Control Type	Handle Type	Includes
495-2880-20	Rechargeable Lithium-Ion	Paddle Switch; No-Lock	Back Body Grip; Anti-Vibration Side Handle	(1) M18 FUEL™ 4-1/2 in/5 in Grinder Paddle Switch, No-Lock (2880-20); (1) Back Flange; (1) Flange Nut; (1) Side Handle; (1) Type 27 Guard; (1) Type 1 Clip-On Guard; (1) Wrench
495-2880-22	Lithium-Ion	Paddle	Straight	(1) M18 FUEL™ 4-1/2 in/5 in Grinder Paddle Switch, No-Lock; (2) M18 REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Pack; (1) M18™ & M12™ Rapid Charger; (1) T27 Guard; (1) T1 Clip-On Guard; (1) Side Handle; (1) Wrench; (1) Back Flange; (1) Flange Nut; (1) Contractor Bag



1-1/2 in Die Grinders

Features:

- Motor provides high power and speed for all 1-1/2 in grinding applications.
- AC/DC capacity works off welding machines and generators for increased productivity and versatility.
- Precision 1/4 in collet securely holds all proper accessories (1/8 in reducing sleeve as optional accessory).

Watts: 350 W

Amps: 4.2 A

Speed: 25,000 RPM

Includes: (2) Wrenches; Collet

SKU	Collet Size	Wheel Diam	Control Type
T15-DWE4887N	1/4 in	1-1/2 in	Paddle; No-Locking
T15-DWE4887	1/4 in	1-1/2 in	Paddle Switch with Lock-On Button

HEATING TOOLS

Heat Guns & Torches



Master Heat Guns®

Features:

- Professional quality, heavy-duty, multiple use heat gun.
- Sturdy die cast housing and powerful high-speed universal motor.
- Adjustable non-slip stand.
- Use to bend plastics, cure adhesives, dry parts, heat parts, shrink tubing and packaging, strip paint and more.
- Three position OFF-COLD-HOT rocker switch.
- Optional momentary contact switch.
- Made in USA

Test & Approvals: UL Listed

Velocity: 3,400 ft/min

Frequency: 60 Hz

Amps: 14.5 A

Watts: 1,740 W

Fan Speed: Single

Outlet Size: 1-1/2 in OD

Cord Length: 6 ft; 3-Wire Grounded

Control Type: Rocker Switch - Hot/Cool/Off

Handle Type: Pistol Grip

Wt.: 3.7 lb

SKU	Operating Temp.	Flow
467-HG-501D	1,200° F	27 ft³/min

MULTI-PURPOSE POWER TOOLS

Combo Kits Cordless



20V MAX* Lithium Ion Grinder Tool Kits

Features:

- Provides high-power for cutting and grinding applications.
- Quick-Change™ Wheel Release allows for tool-free wheel changes without the need for a wrench.
- Tool-free guard allows for quick and easy guard adjustments/positioning.
- 2-finger trigger switch (w/ lock-off button) allows for convenient activation and easier gripping.
- 2-position side handle offers greater control, comfort and versatility.

Batt. Cap.: 5 Ah

Speed: 7,000 RPM

Includes: DCG412 Grinder; (2) DCB205 20V MAX* XR Premium Li-Ion Battery; Fast Charger; Spanner Wrench; 5 inch Type 27 Grinding Guard; 2-Position Side Handle; Contractor Bag

SKU	Voltage	Batt. Type
T15-DCG412P2	20 V	Lithium-Ion



M18 FUEL™ 2-Tool Combo Kits

Features:

- Includes Milwaukee® cordless hammer drill/driver and cordless impact driver.
- Each tool features dynamic Powerstate™ brushless motor.
- 4-mode Drive Control™ provides greater control over output speed and power.
- Includes durable carrying case.

Speed: 2100/3900 RPM

Batt. Cap.: 5 Ah

Batt Type: Lithium-Ion

Handle Type: Side Handle

Includes: (1) M18 FUEL™ 1/2 in Hammer Drill/Driver; (1) M18 FUEL™ 1/4 in Hex Impact Driver; (2) M18™ REDLITHIUM™ XC5.0 Extended Capacity Battery Pack; (1) M18™ & M12™ Multi-Voltage Charger; (1) Side Handle; (2) Belt Clip; (1) Blow Molding Carrying Case

SKU	Voltage	Chuck Size
495-3697-22	18 V	1/2 in; 1/4 in



M18™ 1/2 in Brushless Hammer Drill/Driver Kits

Features:

- Compact design provides excellent balance and control, ideal for overhead applications or work in tight spaces.
- Milwaukee brushless motor optimized for efficiency, this motor delivers more run-time and longer life than a brushed motor.
- All-metal gear case and 1/2 inch metal chuck, provide maximum durability.

Batt. Cap.: 3.0 Ah

Torque: 725 in-lb

Speed: 1800 RPM

Includes: (1) M18™ 1/2 in Brushless Hammer Drill (Tool Only) (2902-20); (2) M18™ REDLITHIUM™ XC 4.0 Extended Capacity Battery Pack(48-11-1840); (1) M18™ and M12™ Multi-Voltage Charger(48-59-1812); (1) Carrying Case (1) Side Handle; (1) Belt Clip

SKU	Voltage	Batt. Type
495-2904-22	18 V	Lithium-Ion



M18™ Cordless Combo Kits

Features:

- Delivers maximum power and application speed for greater efficiency on the job.
- Superior control and versatility.

Batt. Cap.: 1.5 Ah

Torque: Drill 500 in-lb; Impact Driver 1,500 in-lb

Speed: 400 RPM; 1,800 RPM

Includes: (1) M18™ Compact 1/2" Drill Driver (2606-20); (1) M18™ 1/4" Hex Impact Driver (2656-20); (2) M18™ Compact REDLITHIUM™ CP1.5 Ah Battery Packs (48-11-1815); (1) M18™ and M12™ Multi-Voltage Charger (48-59-1812); (1) Belt Clip; (1) Contractor Bag

SKU	Voltage	Batt. Type
495-2691-22	18 V DC	M18™ REDLITHIUM™ Compact

CLOTHING PROTECTION

Coveralls & Overalls



Tyvek® 400 Coveralls

Features:

- Composed of Tyvek® 400 flash-spun, high-density polyethylene which creates a unique, nonwoven material.
- Offers inherent barrier against particles down to 1.0 micron in size.
- Protection built into the fabric itself, no films or laminates to abrade or wear away.
- Comfort fit design enables a greater range of movement while stretching and bending with reinforcement in high stress areas.
- Available in many different styles.

Color: White

Resistance: Hazardous Aerosols/Dry Particles; Non-Hazardous Light Liquid Splash

Applications: Agriculture; Asbestos Abatement; Environmental Cleanup; Food Processing; General Maintenance/Operations; Mold Remediation; Spray Painting; Wind Turbine Manufacturing

SKU	Size Group	Style
251-TY120S-L	Large	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY120S-XL	X-Large	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY127S-XL	X-Large	Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap
251-TY120S-2XL	2X-Large	Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap
251-TY122S-2XL	2X-Large	Serged Seams; Attached Hood (Respirator Fit); Attached Skid-Resistant Boot; Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap
251-TY127S-2XL	2X-Large	Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap

EAR PROTECTION

Earplug Parts & Accessories



PlugStation® Earplug Dispensers

Features:

- Compliance — High visibility to increase awareness for your hearing conservation program.
- Convenience — Hang a PlugStation® anywhere plugs are needed.
- Workers take one pair at a time so there are no wasteful grabbing of multiple pairs.
- When PlugStation® is empty, simply dispose of it and hang a new one.
- Uncorded earplugs are available in two sizes - 250 pairs and 500 pairs.
- Available for CAMO PLUGS® Uncorded, Glide® Packaged Corded, Goin'Green® Uncorded, Mellows® Uncorded, Meteors® Small/Uncorded, Pura-Fit® Corded/Uncorded/Packaged Corded, SparkPlug® Corded/Uncorded/Packaged, and SparkPlug® Metal Detectable/Corded/Packaged styles.
- Can also be used with EcoStation™/PlugStation® Magnetic Bracket Assembly (6868 sold separately).

Test & Approvals: ANSI S3.19-1974

Color: Assorted Color Swirls/Streaks Earplugs

Includes: Dispensers with Uncorded Earplugs; Mounting Brackets

Quantity: (4) Dispensers; (4) Mounting Brackets; 500 Pairs/Dispenser



SKU	Used With	Type
507-6645	SparkPlugs® Earplugs; Uncorded	PlugStation® Earplug Dispenser

Earplugs



3M™ E-A-R™ Classic™ Earplugs

Features:

- Flame-retardant.
- Moisture resistant.
- Shape prevents shifting and keeps effectiveness of noise seal constant.
- Slow recovery PVC foam provides comfort with low pressure.

Color: Yellow

Type: Uncorded

Packing Type: Pillow Pack

Quantity: 200 pair per box

SKU	Noise Reduction	Body Material
247-310-1001	29 dB	Polymer Foam



AUTHORIZED DISTRIBUTOR



Laser Lite® Disposable Earplugs

Features:

- Vibrant colors make protection visible.
- Self-adjusting polyurethane foam expands to fit virtually every wearer.
- Contoured T-shape for easy insertion and wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.

Test & Approvals: ANSI S.3.19-1974;29 CFR 1910.95;9001:2008 - ISO

Color: Magenta/Yellow

SKU	Noise Reduction	Body Material	Type	Quantity
154-LL-1	32 dB	Polyurethane Foam	Uncorded	200 pairs/box
154-LL-30	32 dB	Polyurethane Foam	Corded	100 pairs/box



Max Lite® Disposable Earplugs

Features:

- Low pressure polyurethane foam expands gently for comfortable long-term wear.
- Contoured T-shape for easy insertion and wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.

Test & Approvals: ANSI S.3.19-1974

Color: Green

SKU	Noise Reduction	Body Material	Type	Quantity
154-LPF-1	30 dB	Foam	Uncorded	200 pair per box
154-LPF-30	30 dB	Foam	Corded	100 pair per box

Max® Disposable Earplugs

Features:

- Contoured design easier to insert, resists tendency to back out of ear canal.
- Polyurethane foam enhances comfort, especially for long-term wear.
- Smooth, soil-resistant closed cell-foam skin prevents dirt build-up.
- Bell shape delivers maximum in-ear comfort.

Test & Approvals: ANSI S.3.19-1974;29 CFR 1910.95;9001:2008 - ISO

Color: Coral



SKU	Noise Reduction	Body Material	Type	Quantity
154-MAX-1	33 dB	Polyurethane Foam	Uncorded	200 pairs/box
154-MAX-30	33 dB	Polyurethane Foam	Corded	100 pairs/box



Pura-Fit® Foam Earplugs

Features:

- Long length for easy fitting and removal.
- Bright color for easy compliance checks.
- Tapered design to fit the ear canal.
- Non-irritating, smooth surface for added comfort.

Test & Approvals: ANSI S3.19-1974

Color: Bright Green

Type: Uncorded

Packing Type: Box

Quantity: 200 pair per box

SKU	Noise Reduction	Body Material
507-6800	33 dB	Foam



Rockets® Reusable Earplugs

Features:

- Easy grip handle.
- Air bubble in the tip provides cushioned comfort.
- Easy insertion in any size ear canal.
- Pocket-Pak® carrying case for plug storage, slips easily into pocket.
- Washable and reusable.

Test & Approvals: ANSI S3.19-1974

Color: Purple

Type: Corded

Packing Type: Box

Quantity: 50 pair per box

SKU	Noise Reduction	Body Material
507-6405	27 dB	TPE

SparkPlugs® Foam Earplugs

Features:

- Extra soft foam and tapered design fit snugly and comfortable in the ear.
- Bright, fun colors provide easy compliance checks.



Test & Approvals: ANSI S3.19-1974

Color: Assorted

Type: Uncorded

Quantity: 200 pair per box

SKU	Noise Reduction
507-6604	33 dB

EYE PROTECTION

Safety Glasses



V30 Nemesis™ Safety Glasses

Features:

- Safety glasses feature a sporty, flexible, lightweight design.
- Wraparound frame has a base curve of 8 that extends the range of peripheral protection, as well as soft touch temples for comfort.
- Patented FLEX-DRY* nose piece designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose for long-term comfort.
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection.
- Includes neck cord for securing them, so that the glasses are ready to protect at a moment's notice.

Test & Approvals: ANSI/ISEA Z87.1+

Lens Material: Polycarbonate

SKU	Frame Color	Temple Color	Lens Tint	Lens Coating/ Shade	Resistance
412-14481	Black	Black	Blue Mirror	Mirror	99.9% UVA/UVB/UVC
412-19644	Camouflage	Camouflage	Bronze	Uncoated	99.9% UVA/UVB/UVC
412-22475	Black	Black	Smoke	Anti-Fog	99.9% UVA/UVB/UVC; Fog
412-25659	Black	Black	Amber	Uncoated	99.9% UVA/UVB/UVC
412-25671	Black	Black	IRUV Shade 5	Uncoated; IRUV Shade 5	99.9% UVA/UVB/UVC
412-25676	Black	Black	Clear	Uncoated	99.9% UVA/UVB/UVC
412-25679	Black	Black	Clear	Anti-Fog	99.9% UVA/UVB/UVC; Fog
412-25685	Black	Black	Indoor/Outdoor	Uncoated	99.9% UVA/UVB/UVC
412-25688	Black	Black	Smoke Mirror	Mirror	99.9% UVA/UVB/UVC



KLEENGUARD™

V60 Nemesis™ Rx Readers Prescription Safety Glasses



Features:

- Features a sporty, flexible, lightweight design.
- Wraparound frame has a base curve of 8 that extends the range of peripheral protection, as well as soft touch temples for comfort.
- Corrective lenses are hard coated for scratch resistance and longer life.
- Patented FLEX-DRY* nose piece designed to be extremely flexible, to channel sweat away from the eyes, and to help prevent slippage down the nose for long-term comfort.
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection.
- Includes neck cord for securing them, so that the glasses are ready to protect at a moment's notice.

Test & Approvals: ANSI Z87.1+

Lens Material: Polycarbonate

Lens Coating/Shade: Hard Coated

Resistance: 99.9% UVA/UVB/UVC; Scratch

SKU	Frame Color	Temple Color	Lens Tint	Diopter Strength
412-22518	Black	Black	Smoke	+2.0
412-28621	Black	Black	Clear	+1.5
412-28624	Black	Black	Clear	+2.0

Safety Goggles



KLEENGUARD™

V90 Shields with Monogoggle™ XTR OTG Goggles



Features:

- The shield features the Monogoggle™ XTR OTG goggles, so there is no need to wear primary eye protection, like with other face shields.
- Provides eye and full face protection from liquids and particles without the hassle of primary eye protection underneath a face shield mask.
- The shield has a D3 rating for droplet and splash protection.
- The goggles portion has a soft, pliable frame that conforms to the face for comfort, a cylindrical lens for increased visibility, indirect ventilation, and fit over most prescription glasses.
- The face shield mask is curved to conform to the shape of face for added protection and includes an adjustable strap.
- Polycarbonate lenses provide 99.9% UVA/UVB/UVC protection.
- Replacement goggle lenses available (30707, 30708).

Test & Approvals: ANSI Z87.1+

Lens Coating/Shade: Anti-Fog

Lens Material: Polycarbonate Face Shield and Goggles

Frame Material: PVC Frame and Nose Piece

Ventilation: Goggles with Indirect Ventilation

Strap Material: Polyester/Rubber Weave

SKU	Frame Color	Lens Tint
412-18629	Blue	Clear

FALL PROTECTION

Lanyards



Turbolite™ + Scorpion Fall Limiters

Features:

- Available in 8 ft and 9 ft lengths.
- Combinations available for unit and lanyard ends, including steel rebar hook for concrete form work.
- Enhanced graphics, icons, and colors on UV-resistant scratch-resistant labeling.
- Designs aligned with Honeywell harnesses for mix and match protection.
- Abrasion-resistant webbing, integral swivel reduces lifeline twisting.

Load Capacity: 420 lb

Hook Type: Swivel Snap

No. of Legs: 1



SKU	Connection Type
493-MTL-OHS1-01/9FT	Carabiner

FIRE, GAS & WATER PROTECTION

Detectors



Clip Single-Gas Detectors

Features:

- One button operation.
- Operates up to two years use without calibration, sensor replacement, or battery recharging/replacement.
- Wide angle flash which alerts simultaneously with audible and vibrating alarm.
- Automatic logging of the 35 most recent gas events.
- Compatible with IntelliDoX, Fleet Manager II Software.

Test & Approvals: IP66/IP67 Rated

Gas Type: Hydrogen Sulfide

Temp. Range: -40° F - 122° F

Sound Level: 95 dBA

Display Type: LCD

Power Source: Lithium Battery

Run Time: 2 Years



SKU	Includes	Sensor Type
Alarm Setting: Low 10 ppm; High 15 ppm		
126-BWC2-H	Specified Sensor; Stainless Steel Alligator Clip; Concussion-Proof Housing; Test Cap; Instructions	Surecell™

Fire Extinguishers



ProLine™ Multi-Purpose Dry Chemical Fire Extinguishers - ABC Type

Features:

- Rechargeable.
- Designed to meet most commercial and industrial specifications.
- Tough impact resistant metal valve, handle and lever.
- Powder coated cylinder for corrosion protection.
- Easy-to-read gauge.

Test & Approvals: UL 3-A; 40-B-C

Fire Type: Class A, B and C Fires

Mounting Position: Upright

Operating Temp.: -40° F - 120° F



SKU	Capacity Wt.	Extinguishing Material	Operating Distance
408-466112	5 lb	Monoammonium Phosphate	12 ft - 18 ft
408-466204	10 lb	Monoammonium Phosphate	16 ft - 20 ft

FIRST AID SAFETY

Eye Wash



Eye and Skin Flush Emergency Station/Replacement Twin Bottles

Features:

- Eye flush kit with 2 bottles and wall mount station.
- Helps to clear eyes of foreign material such as dust, pollen, and chemicals and to relieve itching and burning.
- Bottles of sterile isotonic buffered solution for washing, flushing, and irrigating the eyes and skin.

Capacity Vol.: 16 oz

Hose Material: Plastic

SKU	Type
579-24-102	Eye Wash Station

Honeywell

Personal Eyewash Products

Features:

- Eyesaline® solution delivery.
- Easy open top.
- User-controlled volume delivery.
- Quality assured manufacturing.

Capacity Vol.: 4 oz



SKU	Type
203-32-000452-0000	Eyewash Solution

Insect Repellents & Sunscreens



Sunscreen Lotions

Features:

- A broad spectrum, SPF 30 sunscreen lotion in a convenient single-dose pouch.
- The non-greasy formula offers UVA/UVB protection and is PABA-free and oil-free.
- Contains added aloe vera gel and vitamin E.
- Passes lineman's glove test.
- Sweat and water resistant for up to 80 minutes.

Test & Approvals: Type 1 Class 2 ANSI/ASTM D 120

Odor/Scent: Characteristic Sunscreen



SKU	Packing Type	Capacity Vol.
253-92101	One-Dose Packet	1/4 oz

HEAD/FACE PROTECTION

Faceshields & Visors



High Performance® Faceshield Windows

Features:

- Injection molded from propionate.
- Heat and scratch resistant.
- Fits easily and comfortably over required protective spectacles or respirators.

Test & Approvals: ANSI Z87.1+

Used With: F-400, F-500, FH-66, FM-70, FM-71 Series

Style: Wide View

Color: Clear

Height: 8 in

Thickness: 0.06 in



SKU	Lens Coating/Shade	Lens Material
280-4178CL	Clear	Propionate

Hard Hat & Cap Parts & Accessories

Honeywell
FIBRE/METAL AUTHORIZED DISTRIBUTOR



High Performance® Hard Hat Faceshield Headgear

Features:

- Made from Noryl®, the same material used in our welding helmets.
- Exceptionally lightweight and comfortable.
- Allows space for air circulation to prevent fogging.
- Accommodates a full selection of standard size windows.

Material: Noryl®

Color: Gray

SKU	Used With	Suspension
280-F400	4178CL; 4178DGN; 4178IRUV3; 4178IRUV5; 4199CL; 4199DGN; 4199IRUV3; 4199IRUV5; 4178IRUV8; 4178TVGY; S178; 4199GDTVGY; S199	Ratchet

MSA
The Safety Company



Fas-Trac® III Replacement Suspensions

Features:

- Ratchet suspension and flush rear lug attachments eliminate pressure points for additional wearer comfort.
- Three levels of nape strap adjustment ensure a customized fit.
- Graspable ratchet with ultra-smooth rotation and steadfast hold.

Material: Plastic/Nylon

SKU	Used With	Suspension	Color
454-10148708	V-Gard®; V-Gard 500; V-Gard GREEN; SmoothDome®	4-Point Ratchet	Black
454-10153385	MSA Skullgard® Helmets	4-Point Ratchet	Gray

Hard Hats & Caps

Honeywell
FIBRE/METAL AUTHORIZED DISTRIBUTOR



SuperEight® E1 Hard Hats

Features:

- Dissipates force on impact by reducing it to smaller increments and spreading it over a greater area.
- The exclusive smooth crown design contains a technically advanced suspension with eight load bearing points to stabilize and balance the hat or cap during everyday wear.

Test & Approvals: Meets ANSI-Z89.1-2009; Type I Class E, G, or C

Adjusting Method: Ratchet

Material: Thermoplastic

Applications: Construction

Type: E-1 Full Brim

Size Group: One Size Fits Most

SKU	Color	Suspension
280-E1RW01A000	White	8-Point



SuperEight® E2 Series Hard Caps

Features:

- Energy control system dissipates force by reducing it into smaller increments and spreading it over a wide area.
- The exclusive smooth crown design contains a technically advanced suspension with eight load bearing points to stabilize and balance the hat or cap during everyday wear.

Test & Approvals: Meets ANSI-Z89.1; Type I Class E, G or C

Adjusting Method: Ratchet

Material: Thermoplastic

Applications: Construction

Type: Cap Style Hard Hat

Size Group: Standard

SKU	Color	Suspension
280-E2RW01A000	White	8-point Ratchet



Skullgard® Protective Caps and Hats

Features:

- Strong, protective hats offer outstanding protection in hot, dangerous industries.
- Tested to radiant heat loads producing temperatures up to, but not exceeding, 350F.
- Smooth crown allows easy use of MSA welding equipment.
- Heavy duty construction produces a sturdy, reliable product for long-lasting use.

Test & Approvals: Meets or Exceeds the Applicable Requirements for a Type 1 Helmet (top impact) outlined in ANSI Z89.1 2003, Class E and G

Adjusting Method: Ratchet

Material: Phenolic

Type: Non-Slotted

Size Group: Standard; 6-1/2 to 8

SKU	Color	Suspension	Applications
454-475395	Natural Tan	Fas-Trac Ratchet	Confined Space; Food Processes; Manufacturing; Painting; Sanding & Grinding; Steel Smelting Foundries; Working at Heights; Welding
454-475407	Natural Tan	Fas-Trac® Ratchet	Confined Space; Food Processes; Manufacturing; Painting; Sanding & Grinding; Steel Smelting Foundries; Working at Heights; Welding



V-Gard® Protective Caps

Features:

- Convenient caps and hats provide comfortable, lightweight protection.
- Self adjusting crown straps ensure a comfortable fit.
- Polyethylene shell provides superior impact protection.

Test & Approvals: Meets or Exceeds the Applicable Requirements for a Type 1 Helmet (top impact) outlined in ANSI Z89.1 2003, Class E and G

Adjusting Method: Ratchet

Material: Polyethylene

Applications: Arc Flash; Asbestos Abatement; Confined Space; Food Processes; Manufacturing; Painting; Sanding & Grinding; Steel Smelting Foundries; Working at Heights; Welding

Type: Slotted

Size Group: 6-1/2 to 8

SKU	Color	Suspension
454-475358	White	Fas-Trac® Ratchet



V-Gard® Protective Hats

Features:

- Convenient caps and hats provide comfortable, lightweight protection.
- Polyethylene shell provides superior impact protection.
- Available with Fas-Trac® III or Staz-On® suspension.

Test & Approvals: Meets or Exceeds the Applicable Requirements for a Type 1 Helmet (top impact) outlined in ANSI Z89.1 2003, Class E and G

Adjusting Method: Ratchet

Material: Polyethylene

Applications: Arc Flash; Confined Space; Manufacturing; Working at Heights; Welding; Among others

Type: Slotted

Size Group: Standard; 6-1/2 to 8

SKU	Color	Suspension
454-475369	White	Fas-Trac®

Welding Helmet Parts & Accessories



Cover Lens

Features:

- Convenient protective cover lens is resistant to abrasion, pitting, spatter, chemicals and solvents.
- Optically correct and balanced.
- Provides superior welding lens protection.

Test & Approvals: OSHA

Resistance: Scratch; Static

Window Size: 2 in x 4.25 in

Material: 70% CR-39 Plastic

Color: Clear

SKU	Style	Lens Coating/ Shade
901-SP-1	Cover Lens	Clear

Honeywell AUTHORIZED DISTRIBUTOR
FIBRE-METAL



Speedy-Loop™ Mounting Systems

Features:

- Easy on/off system for mounting welding helmets onto protective caps.
- Fully adjustable.

Color: Gray

Material: Plastic

Size: Adjustable

SKU	Used With	Type
280-5000-H5	Fibre-Metal Protective Caps	Speedy-Loop Mounting System

HEAT STRESS PROTECTION

Activity Drinks



G Series O2 Perform® Thirst Quencher Instant Powders

Features:

- Hydrates with electrolytes that help them replace the carbs, electrolytes and fluids they lose when they sweat.
- Carbohydrates help stimulate rapid fluid absorption and fuel the active body.

Quantity: 32 EA/CA

SKU	Package Yield	Capacity Vol.	Flavor	Packing Type
308-03944	2.5 gal	21 oz	Fruit Punch; Lemon-Lime; Orange; Frost Riptide Rush	Pack
308-03969	2.5 gal	21 oz	Lemon-Lime	Pouch
308-03970	2.5 gal	21 oz	Orange	Pouch
308-33673	2.5 gal	21 oz	Frost Riptide Rush	Pouch
308-33677	2.5 gal	21 oz	Glacier Freeze	Pouch
308-33691	2.5 gal	21 oz	Fruit Punch	Pouch

Powder Sticks

Features:

- Powdered mix contains the same electrolyte formula found in the original Gatorade.
- The refreshing choice when you need to replace electrolytes lost from sweat while performing rigorous physical activity.
- Take these convenient packets with you anywhere

Quantity: 80 per case



SKU	Package Yield	Capacity Vol.
308-04702	20 oz	1.23 oz



Qwik Stik® ZERO Sugar

Features:

- Great-tasting sugar-free electrolyte replacement.
- Ideal for diabetics and carb-conscious consumers.

Packing Yield: 20 oz

SKU	Capacity Vol.	Flavor	Quantity
690-159060100	0.11 oz	ZERO Sugar Orange	500 per case
690-159060101	0.11 oz	ZERO Sugar Mixed Berry	500 per case
690-159060102	0.11 oz	ZERO Sugar Fruit Punch	500 per case
690-159060103	0.11 oz	ZERO Sugar Lemonade	500 per case
690-159060106	0.11 oz	ZERO Sugar Lemon-Lime	500 per case
690-159060107	0.11 oz	ZERO Sugar Grape	500 per case
690-159060119	0.11 oz	ZERO Sugar Fruit Punch; ZERO Sugar Mixed Berry; ZERO Sugar Orange; ZERO Sugar Strawberry Lemonade	200 per case

Squeeze® Freezer Pops

Features:

- Great way to cool down the body during hot or fatiguing work situations.
- Just freeze and serve to administer a tasty way to provide electrolytes to any work crew.
- Formulated to be absorbed significantly faster than water, allowing the body to replenish electrolytes and minerals for proper hydration.

Flavor: Cherry; Grape; Lemon-Lime; Mixed Berry; Orange

Quantity: 150 EA/CA



SKU	Package Yield	Capacity Vol.
690-159200201	3 oz	3 oz

Sweat Bands



Headgear
Sweatbands

Features:

- Individually packaged.
- Hook & loop closure allows the fit onto most major brand headgear.
- Sweat absorbent air cushioned layer lined with 100% fleece cotton.

Used With: Suspension Headgear

Strap Type: Hook and Loop

SKU	Color	Material
101-SB320V	Orange	Fleece Cotton

LOCKING DEVICES

Lockouts & Hasps



Safety Series™ Personal Lockout Kits

Features:

- Available with your choice of three padlock styles.
- Carrying case keeps important lockout devices and padlocks together.
- Kits include high use components satisfying most applications.
- Personal kits for individual workers with keyed alike padlocks for worker convenience.

Width: 10 in - 8 in

Shackle Length: 1-1/4 in

No. of Padlocks: 3

Includes: (1) 1 in dia Steel Jaw Hasp, (1) Red Labeled Snap-On Hasp, (1) Wall Switch Cover, (1) Circuit Breaker Padlock, (1) Red/Black Plastic Lockable Carrying Case (Accepts up to 1-1/4 in Shackle), (12) Tags, (2) Tall and Wide Toggle Universal Circuit Breaker Lockout, (3) Standard Toggle Universal Circuit Breaker Lockout, (3) Red Thermoplastic Keyed-Alike Padlocks

Used With: Electrical Lockout

Depicted Text: Danger; Do Not Operate; Locked Out

Color: Black; Red; White

SKU	Type	Length
470-1457E410KA	Group Lockout Kit	17-1/4 in

Zenex™ Thermoplastic
Safety Lockout Padlocks



Features:

- Designed exclusively for lockout tagout applications.
- Durable, lightweight, non-conductive Thermoplastic lock body.
- Customize on-site with permanent, write-on labels.
- Compliance with "One Employee, One Lock, One Key" directive.
- High security, reserved-for-safety cylinder.
- Key retaining, ensures that padlock is not left unlocked.
- 6-pin tumbler for Keyed Alike (KA), Keyed Different (KD), and Master Keyed (MK) styles.
- Choose from 1-3/4 inch (406 and 410) or 3 inch (411) body heights.
- Dielectric (406) options available.

Color: Red

SKU	Type
470-410RED	6-Pin Tumbler Cylinder

RESPIRATORY PROTECTION

Cartridge Respirator Parts & Accessories



3M™ Particulate Filters

Features:

- Lightweight and easy to breathe through.
- Bayonet compatibility allows use with many 3M™ half and full facepieces and certain 3M™ Scott™ full facepieces.
- Assortment of filters available for a wide range of applications.

Test & Approvals: NIOSH

Filtration Grade: P100

Usage: Welding; Gas Cutting; Brazing; Metal Pouring; Soldering; Cadmium; Lead; Arsenic; Asbestos

Color: Magenta

SKU	Type	For Model	Resistance
142-2091	Filter	3M™ Cartridges 6000 Series; Reusable Respirators	Oil and Non-Oil Based Particles
142-2097	Filter	3M™ Cartridges 6000 Series; Reusable Respirators	Nuisance Level Organic Vapor



3M™ Organic Vapor Cartridge 6001

Features:

- Swept-back design allows an enhanced field of view and comfort.
- Bayonet compatibility allows use with many 3M™ Half and Full Facepiece Respirators.
- Wide range of applications reduces inventory needs.
- Simple installation and usage requirements reduces training requirements.

Test & Approvals: NIOSH approved for protection against certain organic vapors

Resistance: Organic Vapors (OV)

Usage: Contaminants

SKU	Type	For Model
142-6001	Cartridge Only	3M™ Half/Full Facepieces 6000, 6500, 7000, 7500, 7800S, and FF-400 Series with bayonet filter holders



3M™ Organic Vapor Cartridge/Filters

Features:

- Unique design for enhanced comfort and visibility.
- Particulate filter is permanently attached to cartridge for easy, one-step assembly.

Filtration Grade: P100

Usage: Contaminants

SKU	For Model	Resistance	Color
142-60921	3M Reusable Respirators	Organic Vapor;Asbestos;Mold;Silica	Magenta/Black
142-60923	3M Reusable Respirators	Acid Gases; Organic Vapors	Magenta/Yellow



AUTHORIZED DISTRIBUTOR



Particulate Filters

Features:

- Can be used alone with filter holder and cover (N750037) or with any Honeywell North N-series cartridge (with N750036).
- Low profile with curved top will not catch on pipes or other objects.

Test & Approvals: NIOSH Approved to 42 CFR Part 84

Resistance: All particulates

Filtration Grade: P100

Usage: All particulates

Color: Magenta

SKU	Type	For Model
068-7580P100	Cartridge	5500, RU8500 and 7700 Half Masks;5400, RU6500 and 7600 Full Facepieces

Cartridge Respirators



3M™ Full Facepiece Reusable Respirators

Features:

- Unique center adapter directs exhaled breath and moisture downward, and helps reduce debris from depositing in the valve.
- Smooth surface allows for quick and easy cleaning.
- Large lens provides a wide field of view and excellent visibility.
- 3M™ Cool Flow™ Valve provides cool, dry comfort.
- Lightweight well-balanced design and silicone face seal for enhanced comfort and durability.

Test & Approvals: NIOSH Approved for protection against certain organic vapors

Body Material: Silicone;Thermoplastic Elastomer

Resistance: Gases;Vapors;Particulates

Includes: One Mask

SKU	Protected Area	Size Group
142-6800	Full Facepiece	Medium
142-6900	Full Facepiece	Large



3M™ Half Facepiece Reusable Respirators

Features:

- Used with 2000, 6000 and 7000 Series filters and cartridges.
- Remarkably comfortable with soft, lightweight facepiece and the easy-to-adjust head straps.
- Reusable.
- Just dispose of the cartridges/filters when used to capacity.

Test & Approvals: NIOSH Approved for negative pressure air purifying and positive pressure dual airline applications

Body Material: TPE

Resistance: Gases; Vapors; Particulates

SKU	Protected Area	Size Group
142-6200	Half Facepiece	Medium
142-6300	Half Facepiece	Large



AUTHORIZED DISTRIBUTOR



7700 Series Half Mask Respirators

Features:

- Silicone facepiece conforms to facial features.
- Contoured sealing flange and cradle suspension system eliminates discomfort.
- Cradle suspension system allows the facepiece to seal evenly on the face without creating pressure points.

Test & Approvals: NIOSH Certified for use with North N Series filters and cartridges, Compact Air PAPR and CF2000 Supplied Air Respirator

Body Material: Silicone

Resistance: Particulates; Chemical; Contamination; Gas

Includes: Facepiece

SKU	Protected Area	Size Group
068-770030L	Half Facepiece	Large
068-770030M	Half Facepiece	Medium

Disposable Respirators



3M™ N95 Particulate Respirators

Features:

- Two-strap design with single point attachment helps provide a secure fit.
- Adjustable noseclip reduces eyewear fogging and helps ensure a better fit and seal.
- Lightweight construction enhances worker comfort and wear time.
- Patented filter media with advanced electrostatically charged microfibers help make breathing easier and cooler for enhanced user comfort.

Test & Approvals: Meets NIOSH 42 CFR 84 N95 Requirements. TC-84A-0007

Size Group: One Size

Resistance: Dust; Non-Oil Particulates

Suspension: Two Fixed Straps

SKU	Usage	Quantity	Includes
142-8210	Grinding; Sanding; Sweeping; Bagging; Other Dusty Operations	20/bx	Adjustable Noseclip
142-8210V	Construction; General Manufacturing; Mining; Oil & Gas; Transportation	10/bx	3M™ Cool Flow™ Valve; Adjustable Noseclip
142-8511	Grinding; Sanding; Sweeping; Bagging; Other Dusty or Arid Operations	10/bx	3M™ Cool Flow™ Valve; M Noseclip



2200 Series N95 Particulate Respirators

Features:

- For humid and/or dusty work environments, this is a mask that fits the bill.
- Dura-Mesh® shell stands up to extreme heat environments while providing better protection to the filter.
- Contoured face seal and molded nose bridge deliver enhanced comfort, particularly during extended periods of wear.

Test & Approvals: NIOSH Approved

Size Group: Medium/Large

Resistance: Non-Oil Based Particulates

Usage: Welding, soldering, grinding, sanding, metalworking, polishing, buffing

Suspension: 2-Strap

Quantity: 20/bx

SKU	Protected Area	Filtration Grade
507-2200N95	Half-facepiece	N95



2300 N95 2-Strap Particulate Respirators with Exhale Valve

Features:

- Exhale valve lets workers breathe easy and stay cool.
- Dura-Mesh® shell resists collapsing in heat and humidity.
- Molded nose bridge seals easily without a metal noseband.
- Facepiece is naturally contoured for less pressure.
- Straps are securely attached so they don't break at the seal.
- Softspun® lining for increased comfort and durability.
- Soft foam nose cushion for added comfort.
- Available in three sizes to fit more workers and increase OSHA compliance.

Test & Approvals: Certified Under 42CFR84; NIOSH Certified to Have a Filter Efficiency of 95% or Greater for Non-Oil Based Particulates

Size Group: Medium/Large

Resistance: Non-Oil Based Particulate Aerosols

Color: Blue

Suspension: 2-Strap

Quantity: 10 EA/BX

SKU	Protected Area	Filtration Grade
507-2300N95	Mouth and Nose	N95

SAFETY STORAGE

Safety Can Parts & Accessories



Funnel Attachments for Type I Steel Safety Cans

Features:

- Economical way to aid pouring into smaller openings.
- Bolt-on funnel with galvanized hose.
- For Type I steel cans only.

Test & Approvals: FM Approved

Color: Yellow

Dia.: 0.5 in

SKU	Includes	Material
400-11202Y	Funnel Only	Polyethylene

Safety Cans



Type I Safety Cans

Features:

- Electric seam weld joins top and body.
- Stainless steel flame arrestor.
- Sturdy 16 gauge shock rim for bottom support.

Dia.: 12-1/2 in

Height: 15-1/2 in

Material: Galvanized Steel

Resistance: Chemicals

Color: Red

Includes: Funnel

SKU	Capacity Vol.	Type
258-UI50FS	5 gal	Flammables



Type I Steel Safety Cans

Features:

- Color coding avoids accidents.
- Self-closing lid controls spills.
- Leakproof, auto-venting lid prevents explosion.
- Available with funnel for cans 1 gal or larger.
- Cans up to 1 quart feature a trigger-release handle, while larger capacities have a swinging handle to greatly ease carrying of heavier loads.

Test & Approvals: 100% Leak Tested; Meets OSHA and NFPA; FM, UL/ULC Listed; CARB Compliant; Worldwide Usage TAA&V certified

Dia.: 11-1/2 in

Height: 16-7/8 in

Material: Galvanized Steel

Resistance: Chemicals

SKU	Capacity Vol.	Type	Color
400-7150100	5 gal	Flammables	Red
400-7150200	5 gal	Diesel	Yellow



Type II AccuFlow™ Safety Cans

Features:

- Color coding avoids accidents.
- Stainless steel flame arrester prevents flashback ignition.
- Easy-to-use Safe-Squeeze® trigger for controlled pouring.
- Two-openings, one for targeted pouring, one with ergonomically designed lift-lever for easy filling.

Dia.: 11.75 in

Height: 17.5 in

Hose O.D.: 1 in

Material: 24 ga Galvanized Steel

Resistance: Chemicals

Includes: Flexible Metal Hose

SKU	Capacity Vol.	Type	Color
400-7250130	5 gal	Safety Can	Red
400-7250230	5 gal	Safety Can	Yellow

TRAFFIC SAFETY

Safety Tapes



Safety Barricade Tapes

Features:

- Safety tapes indicating warning or danger areas.
- Large bold lettering is easy to read at a distance.
- Durable plastic material remains pliant in cold weather.

Width: 3 in

Length: 1,000 ft

Material: Plastic

SKU	Depicted Text	Color	Thickness
272-71-1001	Caution	Yellow	2 mil
272-77-1001	Caution	Yellow	2 mil
272-77-1004	Danger	Red	4 mil

SOLDERING & BRAZING

Soldering/Brazing Torches



High Heat Torch

Features:

- Work faster and more efficiently with maximum heat.
- Ideal for job site projects including large soldering, brazing, heat treating and light welding.
- Large, optimized swirl flame provides maximum heat output.
- Cast aluminum body for durability.
- Pressure regulated for consistent performance when tilted or momentarily inverted.
- Run-lock button keeps the torch lit for continuous use.

Process: Brazing; Heat Treating; Large Diameter Soldering

Includes: High Heat Torch

SKU	Gas Type	Body Material
189-361524	MAPP® (Methyl Acetylene-Propadiene)	Cast Aluminum

TORCH & WEED BURNERS



Hotspotter All Purpose Propane Torches

Features:

- Flame tools are for exterior maintenance and repair.
- Hotspotter is an all-purpose propane torch that delivers at full cylinder pressure with no smoke and no fumes.
- Ergonomic handle with adjustable trigger.
- Hooks up to standard 20-pound propane tank.

Gas Type: Propane

Handle Length: 31 in

Hose Length: 10 ft

Type: Medium-Duty Open Flame Torch

Includes: Brass Propane Tank Adaptor; Brass Flow Control Shut-Off Valve; Spark Ignitor; Welded Tube Nozzle; Hose

SKU	Output Power
312-WB-102	500000 Btu

WELDING & CUTTING ACCESSORIES

Centering Heads



Centering Heads

Features:

- Aids in setting of center lines, establishing angles and marks for butt-ins, location points inside pipes and tanks, laying out keyways, and measuring declivity.
- The Y-type head is fitted with an adjustable dial bubble protractor (DSL).
- Use a tapping hammer to operate the hardened centering pin.

Head Type: Y-Type

Type: #6 Standard Centering Head; DSL

SKU	Pipe Cap.	Head Width
430-14775	1/2 in - 4 in	4 in



Magnetic Centering Heads with Vial

Features:

- One piece Y-shaped body design with magnetic legs.
- Built-in dial with 2-1/2° increments that turns 360°.
- Hardened center punch marks set position by taping with a hammer.
- Used to establish and mark a centerline at any angle around circumference on a pipe or tank or as a protractor level.
- Excessive heat can damage magnets.
- Keep magnets away from sensitive electronic devices.

Head Type: Y-Shaped

SKU	Pipe Cap.	Type
496-53025-M	1 in - Larger	Small
496-53076-M	6 in - Larger	Medium

Cutting & Burning Guides



Wrap-A-Round® Rulers

Features:

- Feature metric scale and pitch chart.
- Resists heat and cold.

Resistance: Cold; Heat

SKU	Size Group	Width	Length	Pipe Capacity
430-14752	Medium	3.88 in	4 ft	3 in - 6 in
430-14753	Large	3.88 in	6 ft	3 in - 10 in



Wizard Wraps

Features:

- Wizard wrap, made from a non-asbestos, heat resistant material, has a nice thick edge for easier more accurate marking and helps keep your soapstone from slipping.
- 36" tape measure printed on the medium & large Wizard-limits the need for an extra tape measure.
- Circumference & Quartering scale printed on every wrap-limits the need for calculation.
- Packaged in a durable, reusable container that will hold up in your tool box.

SKU	Size Group	Width	Length	Pipe Capacity
496-WW-16	Small	2-5/8 in	30 in	1 in - 6 in
496-WW-17	Medium	3-7/8 in	60 in	2 in - 16 in
496-WW-17A	Large	5-1/4 in	120 in	6 in - 30 in

Cylinder & Caps



WORTHINGTON CYLINDERS
A Worthington Industries Company



MAP-Pro™ Hand Torch Cylinders

Features:

- Ideal for medium to heavy soldering and brazing.
- Flame temperature in air is 3600 degrees F.

Wt.: 1.9 lb

SKU	Type	Gas Type
870-332477	Hand Torch Cylinder	MAP-Pro™



TX 9 Propane Cylinders

Features:

- Ideal for general soldering.
- Flame temperature in air is 3450 degrees F.

Capacity Vol.: 14.1 oz

Wt.: 1.9 lb



SKU	Type	Gas Type
870-304182	Hand Torch Cylinder	Propane

Spark Lighter & Flints



Shurlite® Spark Lighters

Features:

- Strong frame and rugged design.
- Options available for flat file with round cup design, single-flint round, triple-flint, and Shoot-a-lite flat pistol shaped spark lighters.

SKU	Type	Quantity
322-3001	Universal Single-Flint Round File Spark Lighter; Flint Easily Replaced; Round File Spins; Square Hood	10 EA/BX
322-4501	Three-Flint Spark Lighter; Heavy-Duty Steel Band; Strong Frame	1 EA/EA

Tip Cleaners



Tip Cleaner Sets

Features:

- Uniform ridges wipe and polish the orifice wall.
- Tapered ends allows smooth easy entry without scratching.
- Attractive aluminum case with a contained spool assembly.
- Smooth leader pilot.
- Tangle-free closed loops.

Dia.: 0.014 in; 0.018 in; 0.021 in; 0.024 in; 0.028 in; 0.032 in; 0.035 in; 0.037 in; 0.039 in; 0.042 in; 0.048 in; 0.055 in; 0.062 in

Size Group: 6 to 26



SKU	Material	Includes
326-STANDARD	Stainless Steel; Aluminum Case	(13) Cleaners; Case; File

Welding Cables & Power Cables



Welding Cables

Features:

- Custom lengths available.
- Custom assemblies available.
- Resistant to oil, chemicals, and solvents.

Test & Approvals: RoHS

Style: Welding Cable

Amps: Consult Ampacity Chart

Temp Range: -50° C (-58° F) - 105° C (221° F)

Jacket Material: EPDM

Number of Conductors: 1

Insulation Thickness: 0.08 in

Voltage: 600 V

Insulation: EPDM

Conductor Material: Stranded Copper



SKU	Cable/Wire Description	Includes
911-2/0-500	2/0 AWG x 500 ft	Cable Only

Welding Hoses



Grade R Twin-Line Welding Hoses

Features:

- High quality Grade R twin-line welding hoses.
- Green hose carries oxygen to welding equipment.
- Red hose carries acetylene.
- Hose cover resists oils.

Test & Approvals: ARPM IP-7-2011

Hose I.D.: 1/4 in

Gas Type: Acetylene Only

SKU	Grade	Pressure	Length
907-LB1004	R	200 psi	100 ft
907-LB504	R	200 psi	50 ft



www.centralwelding.com · (800) 697-0128

